SPEC CFP95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

IBM Corporation
RS/6000 44P-270 (1 CPU)

SPECfp95 = 48.2

SPECfp_base95 = 46.0

SPEC license # 11 | Tested By: IBM, Austin, TX | Test Date: Jan-2000 | Hardware Avail: Feb-2000 | Software Avail: Mar-2000

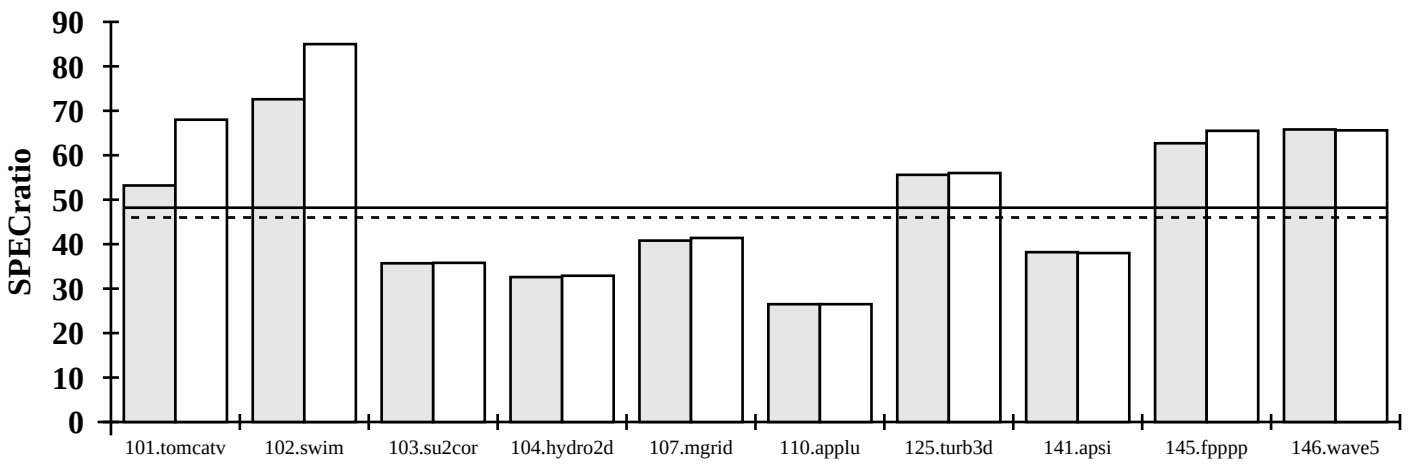

Hardware/Software Configuration for:
RS/6000 44P-270 (1 CPU)

Hardware

Model Name:	RS/6000 44P-270 (1 CPU)
CPU:	375 MHz Power3-II
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	4MB
Other Cache:	None
Memory:	4GB
Disk Subsystem:	2x9.1GB IBM Fast/Wide SCSI 7200 RPM
Other Hardware:	None

Software

Operating System:	AIX 4.3.3
Compiler:	XL Fortran version 7.1.0.0 KAP version 4.0
File System:	AIX/JFS
System State:	Multi-user

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
101.tomcatv	3700	69.5	53.2	54	68.0
102.swim	8600	118	72.6	101	85.0
103.su2cor	1400	39.2	35.7	39	35.8
104.hydro2d	2400	73.6	32.6	73	32.9
107.mgrid	2500	61.2	40.8	60	41.4
110.applu	2200	83.0	26.5	83	26.5
125.turb3d	4100	73.7	55.6	73	56.0
141.apsi	2100	54.9	38.2	55	38.0
145.fpppp	9600	153	62.7	146	65.5
146.wave5	3000	45.6	65.8	46	65.6
SPECfp_base95 (G. Mean)			46.0		
		SPECfp95 (G. Mean)			48.2

Notes/Tuning Information

```
Base: -O5 -lmass
Peak
101: -O5 -qhot=arraypad=48 -lmass -bnso -bI:/lib/syscalls.exp
102: -O5 -qhot=arraypad=28 -qpdf1/pdf2 -lmass
103: -O5 -lmass
104: -O5 -lmass
107: -O5 -qipa=inline=limit=100 -lmass -bnso -bI:/lib/syscalls.exp
110: -O5 -lmass
125: -O5 -qnosave -lmass
141: -O5 -lmass -bnso -bI:/lib/syscalls.exp
145: -O5 -Pk -Wp,-f -lmass
146: -O5 -lmass -bnso -bI:/lib/syscalls.exp
NOTE: 4 CPUs were installed, but 3 were disabled via the service processor setup menu
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@spec.org
http://www.spec.org/

--

Prepared By: IBM Austin