SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP SPP1600

SPECint_rate95 =	290
SPECint_rate_base95 =	290

SPEC license # 3	Tested By: HP Richardson, Tx	Test Date: May-96	Hardware Avail: Jun-96	Software Avail: Jun-96

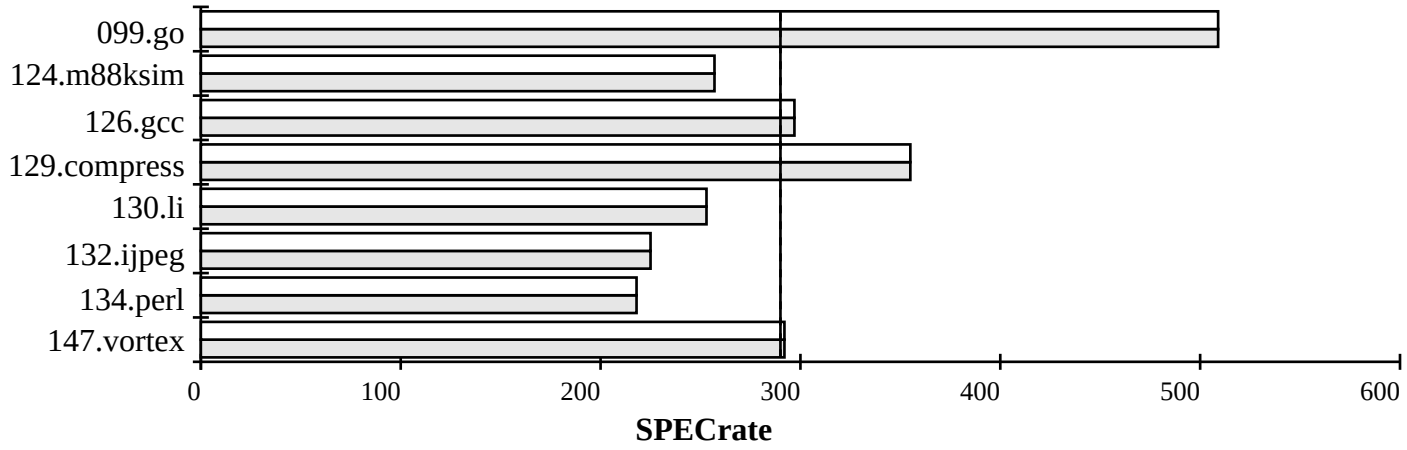

Hardware/Software Configuration for:
HP SPP1600

Hardware

Model Name:	HP SPP1600 CD
CPU:	120 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	8
Primary Cache:	1mB(I+D) off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	2GB
Disk Subsystem:	6 x 1.5GB
Other Hardware:	None

Software

Operating System:	SPP-UX 4.0
Compiler:	HP 92453-01 A.09.73 HP C compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	8	650	509	8	650	509
124.m88ksim	8	532	257	8	532	257
126.gcc	8	412	297	8	412	297
129.compress	8	366	355	8	366	355
130.li	8	542	253	8	542	253
132.ijpeg	8	767	225	8	767	225
134.perl	8	627	218	8	627	218
147.vortex	8	665	292	8	665	292
SPECint_rate_base95 (G. Mean)			290			
		SPECint_rate95 (G. Mean)				290

Notes/Tuning Information

```
PORTABILITY FLAGS:
All: -Ae
126: -Ae -DUSG

BASE FLAGS:
All: +Oall +Onoregionsched -Wl,-aarchive +P

PEAK FLAGS:
Same as BASE FLAGS.

Note: The +P indicates the use of profile based optimization.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org