SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Dell Computer Corporation
Dell Dimension XPS Pro200n

SPECint_rate95 = 73.8

SPECint_rate_base95 = 73.8

SPEC license # 14	Tested By: Intel	Test Date: May-96	Hardware Avail: Jun-96	Software Avail: Mar-96

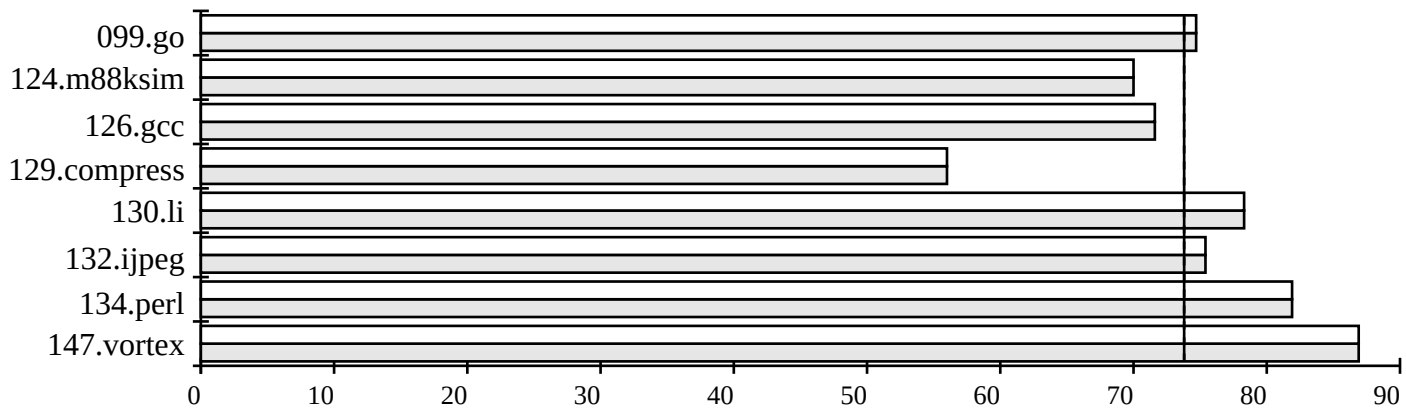

Hardware/Software Configuration for:
Dell Dimension XPS Pro200n

Hardware

Model Name:	XPS
CPU:	200MHz Pentium Pro processor
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	8KBI+8KBD
Secondary Cache:	256KB(I+D)
Other Cache:	None
Memory:	64MB(EDO)
Disk Subsystem:	1MB IDE Quantum Fireball
Other Hardware:	Integrated EIDE disk controller

Software

Operating System:	UnixWare 2.0, UnixWare SDK
Compiler:	Intel C Reference Compiler V2.3
File System:	UFS
System State:	Single User

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	554	74.7	1	554	74.7
124.m88ksim	1	244	70.0	1	244	70.0
126.gcc	1	214	71.6	1	214	71.6
129.compress	1	289	56.0	1	289	56.0
130.li	1	218	78.3	1	218	78.3
132.ijpeg	1	287	75.4	1	287	75.4
134.perl	1	209	81.9	1	209	81.9
147.vortex	1	280	86.9	1	280	86.9
SPECint_rate_base95 (G. Mean)			73.8			
SPECint_rate95 (G. Mean)						73.8

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -tp p6 -ipo  -prof_gen -ircdb_dir /proj/tmp/IRCDB
Pass2: -tp p6 -ipo  -prof_use -ircdb_dir /proj/tmp/IRCDB
-ircdb_dir is a location flag and not an optimization flag
Portability: 124: -DSYSV -DLEHOST 130, 134, 147: -lm  132: -DSYSV  126: -lm -lc -L/usr/ucblib -lucb -lmalloc
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org

-- Prepared By: --