SPEC CFP95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Digital Equipment Corp.
DIGITAL Server 5305 6533A

SPECfp_rate95 = 195

SPECfp_rate_base95 = 182

SPEC license # 2	Tested By: Digital NH	Test Date: Jan-98	Hardware Avail: Jan-98	Software Avail: Oct-97

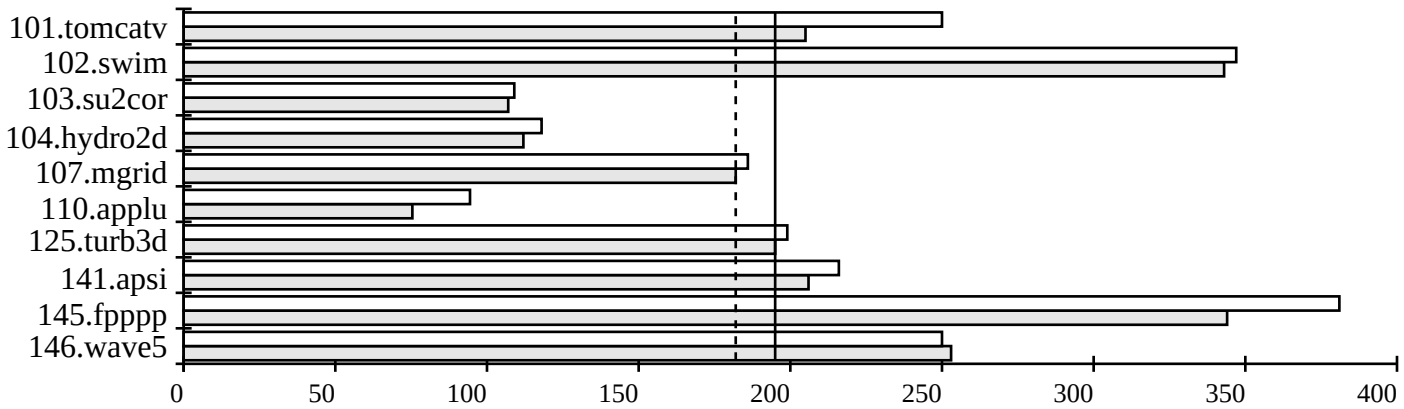

Hardware/Software Configuration for:
DIGITAL Server 5305 6533A

Hardware

Model Name:	DIGITAL Server 5305 6533A
CPU:	533 MHz 21164
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	8KB(I)+8KB(D) on chip
Secondary Cache:	96KB (I+D) on chip
Other Cache:	4MB (I+D) off chip
Memory:	512MB
Disk Subsystem:	RZ29B 4GB
Other Hardware:	Ethernet

Software

Operating System:	Windows NT V4.0 Server
Compiler:	Visual Fortran V5.0 KAP Fortran V1.1
File System:	FAT
System State:	Default

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
101.tomcatv	1	162	205	1	133	250
102.swim	1	225	343	1	223	347
103.su2cor	1	118	107	1	115	109
104.hydro2d	1	193	112	1	183	118
107.mgrid	1	123	182	1	121	186
110.applu	1	263	75.4	1	210	94.4
125.turb3d	1	189	195	1	186	199
141.apsi	1	91.6	206	1	88	216
145.fpppp	1	251	344	1	227	381
146.wave5	1	107	253	1	108	250
SPECfp_rate_base95 (G. Mean)			182			
SPECfp_rate95 (G. Mean)						195

Notes/Tuning Information

```
compiler: kf77
baseline: /fkapargs="/ipa /ag=a" -optimize:5 -tune:ev5

tomcatv:  /fkapargs="/ag=ab /fuselevel=2" -optimize:4
swim:     /fkapargs="/tune=ev4 /ag=ab -fuselevel=2 -r=1 -ur=2 -ur2=600" -optimize:5 -transform_loops
su2cor:   -transform_loops -optimize:4
hydro2d:  /fkapargs="/ur=8 /ur2=400 /ur3=10 /tune=ev4" -inline:speed -optimize:5
mgrid:    /fkapargs="/fuselevel=1 /ipa" -optimize:5
applu:    /fkapargs="/tune=ev5 /fuse /ag=a" -optimize:5 -tune:ev5 -notransform_loops
turb3d:   /fkapargs="/tune=ev5 /fuse /fuselevel=2 /ipa" -optimize:5 -notransform_loops
apsi:     /fkapargs="/tune=ev5 /ag=ab /ipa_optimize=2 /ur=4 /ur2=800 " -fast -optimize:5
fpppp:    /fkapargs="/so=0 /o=0" -optimize:2
wave5:    /fkapargs="/ipa /ag=a /ur=5 /ur2=600" -optimize:4 -pipeline
```