SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Data General Corporation AViiON AV 8600 (4 CPU)

SPECint_rate95 = 299

SPECint_rate_base95 = 299

SPEC license # 1014	Tested By: Data General Corporation	Test Date: Feb-98	Hardware Avail: Jan-98	Software Avail: Jan-98

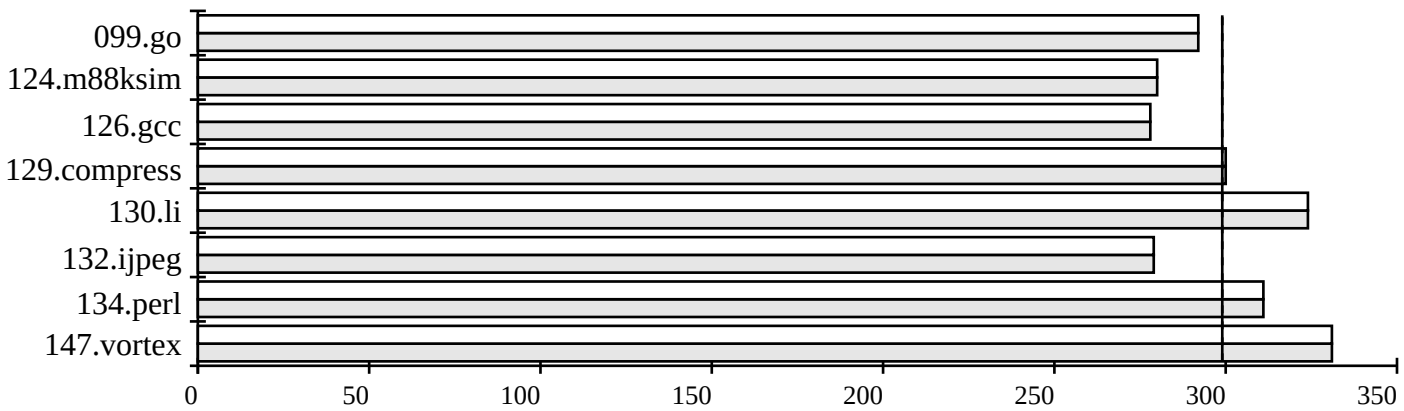

Hardware/Software Configuration for:
AViiON AV 8600 (4 CPU)

Hardware

Model Name:	AViiON AV 8600
CPU:	200 MHz Pentium Pro
FPU:	Integrated
Number of CPU(s):	4
Primary Cache:	8KBI + 8KBD on chip
Secondary Cache:	512KB (I+D) on chip
Other Cache:	None
Memory:	1 GB
Disk Subsystem:	1 x 2GB; 4 x 9GB RAID 0
Other Hardware:	Ethernet

Software

Operating System:	Microsoft Windows NT Server 4.0 SP3 (Enterprise)
Compiler:	Intel C/C++ Compiler Version 2.4 P98012
File System:	NTFS
System State:	Default

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	4	566	292	4	566	292
124.m88ksim	4	244	280	4	244	280
126.gcc	4	220	278	4	220	278
129.compress	4	216	300	4	216	300
130.li	4	211	324	4	211	324
132.ijpeg	4	309	279	4	309	279
134.perl	4	220	311	4	220	311
147.vortex	4	293	331	4	293	331
SPECint_rate_base95 (G. Mean)			299			
				SPECint_rate95 (G. Mean)		299

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -G6 -Qxi -Qipo -Qprof_gen -Qprof_dir c:/temp/IRCDB
Pass2: -G6 -Qxi -Qipo -Qprof_use -Qprof_dir c:/temp/IRCDB
-Qprof_dir is a location flag and not an optimization flag
Portability: 124: -DNT -DLEHOST
Portability: 126: -D__STDC__=0 -DONLY_INT_FIELDS=0 -Dalloca=_alloca -DDeleteFile=remove
Portability: 132: -DMSDOS
Portability: 134: -DMSDOS -DI_TIME
The Intel C/C++ Compiler Version 2.4 P98012 is shipped as an upgrade to VTune 2.5 (see http://developer.intel.com).
Microsoft Visual C++ 5.0 is also installed for libraries.
```

For More Information Contact: SPEC info@spec.org http://www.spec.org/

-- Prepared By: --