SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Enterprise 4500

SPECint_rate95 = 1526

SPECint_rate_base95 = 1247

SPEC license # 6	Tested By: Sun, Palo Alto	Test Date: Sep-98	Hardware Avail: Dec-98	Software Avail: Oct-98

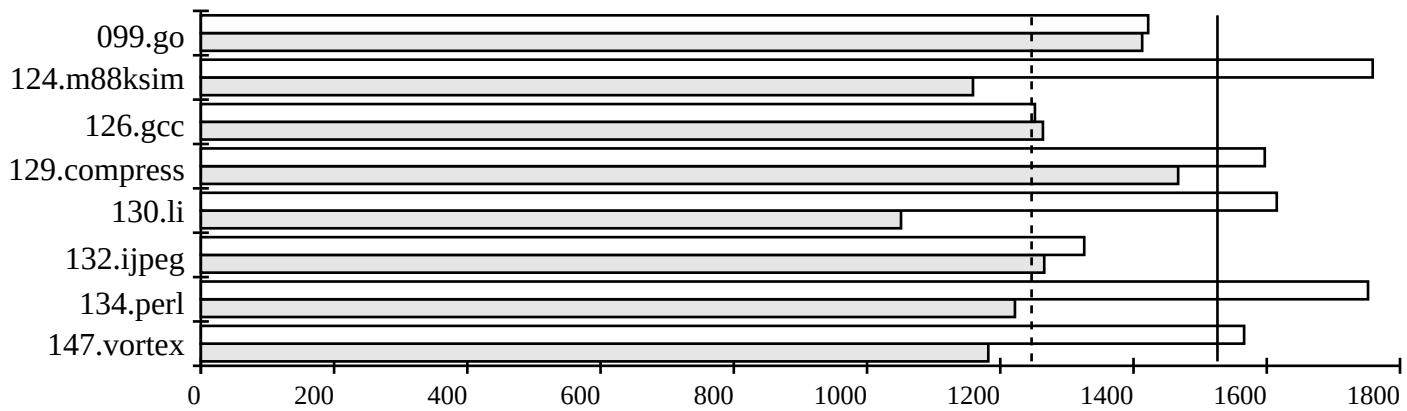

SPECrate

Hardware/Software Configuration for:
Sun Enterprise 4500

Hardware

Model Name:	Sun Enterprise 4500
CPU:	400MHz UltraSPARC II
FPU:	Integrated
Number of CPU(s):	10
Primary Cache:	16KBI+16KBD on chip
Secondary Cache:	4096KB(I+D) off chip
Other Cache:	None
Memory:	8192MB
Disk Subsystem:	2 x 9GB
Other Hardware:	FastEthernet

Software

Operating System:	Solaris 2.7
Compiler:	Sun C 5.0
File System:	UFS
System State:	Multi-User
Kernel Extensions:	

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	10	293	1413	10	291	1422
124.m88ksim	10	148	1159	10	97	1759
126.gcc	10	121	1264	10	122	1252
129.compress	10	110	1467	10	101	1597
130.li	10	163	1051	10	106	1615
132.ijpeg	10	171	1266	10	163	1326
134.perl	10	140	1222	10	98	1752
147.vortex	10	206	1182	10	155	1566
SPECint_rate_base95 (G. Mean)			1247			
SPECint_rate95 (G. Mean)						1526

Notes/Tuning Information

```
Baseline: -fast -xO5 -xarch=v8plusa -xprofile=use
099.go: -fast -xO4 -xarch=v8plus -xrestrict -xcrossfile -W2,-O4+ansi_alias+bopt -xprofile=use
124.m88ksim: -fast -xO5 -xsafe=mem -xarch=v8plus -xcrossfile -xrestrict
124 cont: -W2,-O4+cond_elim+pde,-Mt9000 -Wc,-Qiselect-sw_pf_tbl_th=20 -xprofile=use
126.gcc: -fast -xO4 -xarch=v8plus -W2,-O4+ansi_alias+cond_elim -xprofile=use
129.compress: -fast -xO4 -W2,-O4+ansi_alias+pde -xarch=v8plus -xprofile=use
130.li: PASS1=-fast -xO4 -xarch=v8plus -xcrossfile -xprofile=collect
130.li: PASS2=-fast -xO5 -xsafe=mem -xarch=v8plus -xcrossfile
130 PASS2 cont: -W2,-O4+ansi_alias+cond_elim+pde,-Mt350,-whole,-crit -xprofile=use
132.ijpeg: -fast -xO5 -xsafe=mem -xarch=v8plus -W2,-O4+ansi_alias+cond_elim -xprofile=use
134.perl: -fast -xO4 -xarch=v8plusa -xchip=ultra -xcrossfile -W2,-Mp1,-ANSI_S,-O4+cond_elim
134 cont: Wc,-Qiselect-sw_pf_tbl_th=30 -xprofile=use -lfast
147.vortex: PASS1=-fast -xO4 -xarch=v8plus -xcrossfile -xprofile=collect
147: PASS2=-fast -xO5 -xsafe=mem -xarch=v8plus -xcrossfile -xprofile=use
147 PASS2 cont: -W2,-O4+cond_elim,-Mt500,-Mr6000,crit
Portability: 124.m88ksim, 132.ijpeg: -DSYSV -Xc, 126.gcc: -Dalloca=__builtin_alloca -Xc
others: -Xc
Shell limits: # ulimit -n 1024  or % limit descriptors 1024
Config Version @(#)uds.cfg 1.0 98/09/03
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --