SPEC CFP95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

FUJITSU LIMITED
GP7000F Model600 250

SPECfp_rate95 = 1146

SPECfp_rate_base95 = 1081

SPEC license # 19 | Tested By: FUJITSU LIMITED | Test Date: Dec-98 | Hardware Avail: Dec-98 | Software Avail: Feb-99

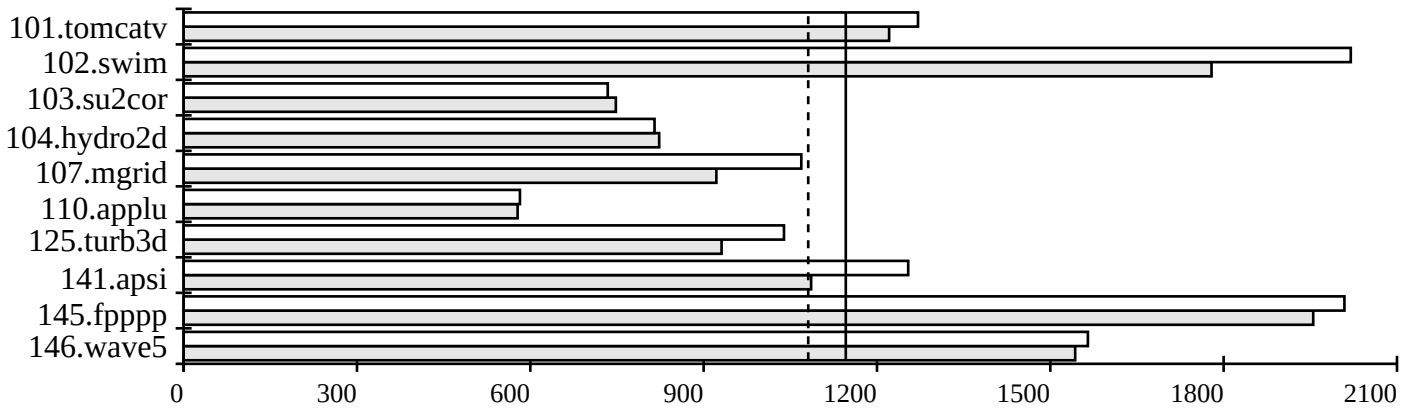

Hardware/Software Configuration for:
GP7000F Model600 250

Hardware

Model Name:	FUJITSU GP7000F Model600 250
CPU:	248MHz SPARC64 GP
FPU:	Integrated
Number of CPU(s):	8
Primary Cache:	64KBI+64KBD on chip, 4way
Secondary Cache:	4.0MB(I+D) off chip
Other Cache:	None
Memory:	4096MB
Disk Subsystem:	2 x 9.0GB
Other Hardware:	Ethernet

Software

Operating System:	Solaris 2.6 HW:5/98
Compiler:	Fujitsu Fortran V4.0.1
File System:	UFS
System State:	Single User
Kernel Extensions:	set consistent_coloring=1

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
101.tomcatv	8	218	1221	8	210	1271
102.swim	8	348	1779	8	307	2020
103.su2cor	8	135	748	8	137	734
104.hydro2d	8	210	823	8	212	815
107.mgrid	8	195	922	8	168	1069
110.applu	8	274	578	8	272	582
125.turb3d	8	317	931	8	284	1039
141.apsi	8	139	1086	8	121	1254
145.fpppp	8	354	1955	8	344	2009
146.wave5	8	140	1543	8	138	1565
SPECfp_rate_base95 (G. Mean)			1081			
SPECfp_rate95 (G. Mean)						1146

Notes/Tuning Information

```
Baseline flags were: -Kfast,V8PFMADD,prefetch,gs
Nonbaseline: PEAKOPT=-X7 -Kfast,V8PFMADD,GREG,gs,prefetch; EXTRA_FFLAGS=-dn
101: ${PEAKOPT} -Kpreex,eval
102: ${PEAKOPT} -Koffset=160 -Ksp=0
103: ${PEAKOPT} -Knofuse,eval -x-
104: ${PEAKOPT} -Kpreex,eval
107: ${PEAKOPT} -Kcommonpad,eval
110: ${PEAKOPT} -Kauto,preex,eval
125: ${PEAKOPT} -Kcommonpad,eval -Ksp=0 -x-
141: -X7 ${PEAKOPT} -Kauto,preex,eval
145: ${PEAKOPT} -Keval
146: ${PEAKOPT} -Kauto,nofuse -x10
Shell limits: ulimit -n 1024; ulimit -s 81920;
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --