SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Intel Corporation
Intel SE440BX2 Motherboard(500 MHz, Pentium III processor)

SPECint95 = 20.7

SPECint_base95 = 20.7

SPEC license # 14 | Tested By: Intel Corp. | Test Date: Feb-99 | Hardware Avail: Mar-99 | Software Avail: Mar-99

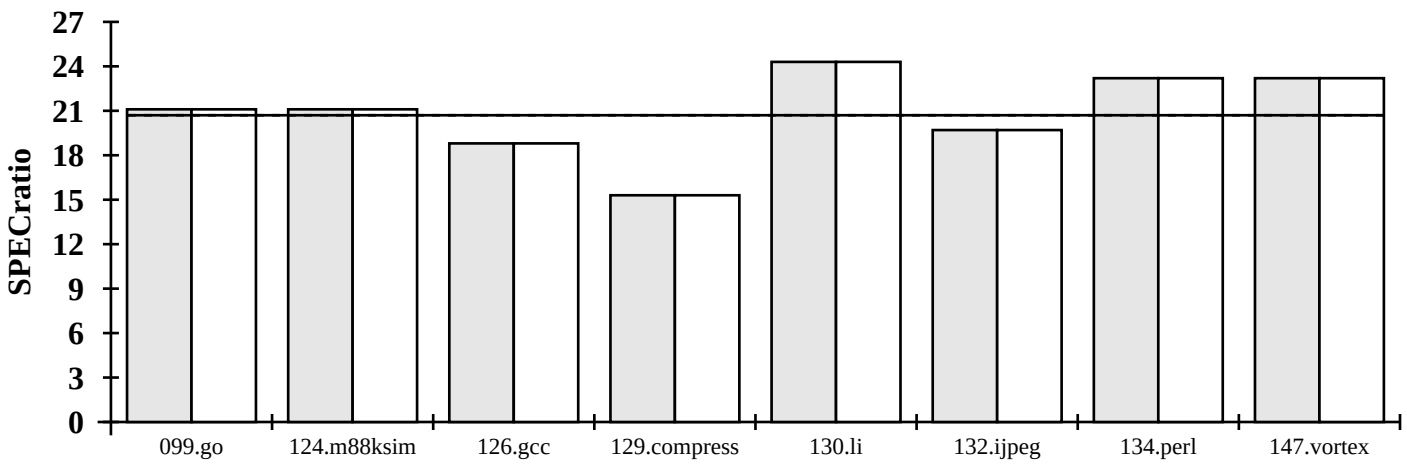

Hardware/Software Configuration for:
Intel SE440BX2 Motherboard(500 MHz, Pentium III processor)

A line in your configuration is too long
or you have too many lines.
Please fix the problem and try again

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	218	21.1	218	21.1
124.m88ksim	1900	89.9	21.1	90	21.1
126.gcc	1700	90.4	18.8	90	18.8
129.compress	1800	118	15.3	118	15.3
130.li	1900	78.3	24.3	78	24.3
132.ijpeg	2400	122	19.7	122	19.7
134.perl	1900	81.8	23.2	82	23.2
147.vortex	2700	116	23.2	116	23.2
SPECint_base95 (G. Mean)			20.7		
		SPECint95 (G. Mean)			20.7

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -G6 -Qipo -Qprof_gen -Qprof_dir c:/temp/IRCDB
Pass2: -G6 -Qipo -Qprof_use -Qprof_dir c:/temp/IRCDB
-prof_dir is a location flag and not an optimization flag
Portability: 124:-DNT -DLEHOST  125: -Qlowercase
Portability: 126: -D__STDC__=0 -DONLY_INT_FIELDS=0 -Dalloca=_alloca -DDeleteFile=remove
Portability: 132: -DSYSV -DMSDOS
Portability: 134: -DMSDOS -DI_TIME
The Intel Compiler 4.0 for Windows NT is shipped with VTune 4.0, see http://developer.intel.com/
Microsoft Visual C++ 6.0 is also installed for libraries
Tested systems can be used with: Shin-G ATX Computer Case; Sparkle, Inc. ATX Power Supply
Product description located as of 8/98:
http://developer.intel.com/design/motherbd/se/se_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://www.intel.com/intel/contact/ for further information
```