



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2680, 2.70 GHz,
DDR3-1600 MHz)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 47.8

MPI2007 license: 25


Test date: May-2012

Test sponsor: Dell

Hardware Availability: Mar-2012

Tested by: Burton Finley

Software Availability: Sep-2011

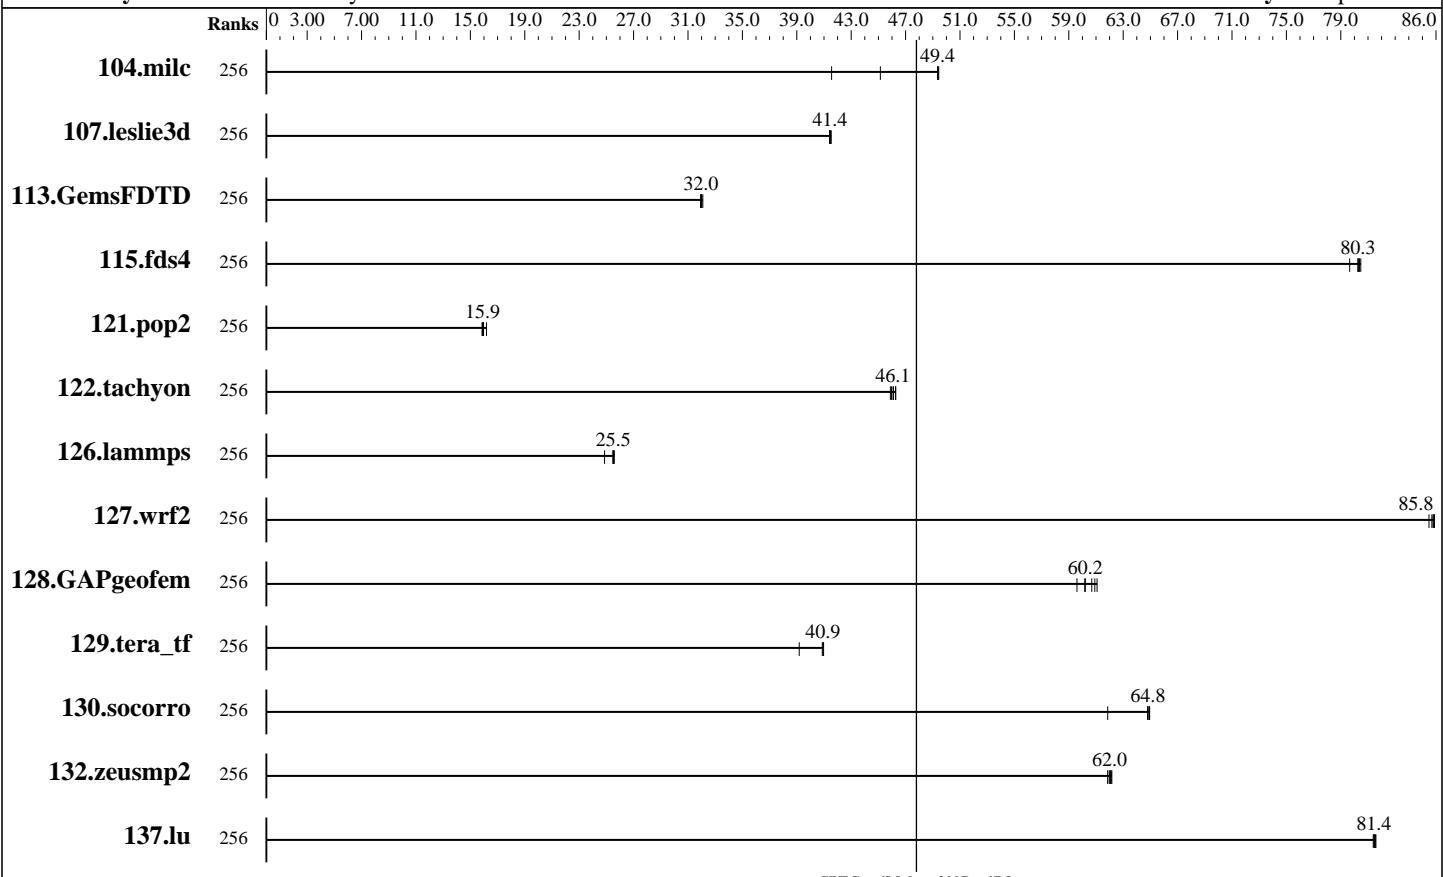

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|----------------|-------|------------|-------------|-------------|-------------|---------|-------|-------|---------|-------|---------|-------|---------|-------|---------|-------|
| | Ranks | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Ranks | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 104.milc | 256 | 37.7 | 41.6 | 31.7 | 49.4 | 31.7 | 49.4 | | | | | | | | | |
| 107.leslie3d | 256 | 126 | 41.4 | 126 | 41.5 | 126 | 41.4 | | | | | | | | | |
| 113.GemsFDTD | 256 | 197 | 32.0 | 198 | 31.9 | 197 | 32.1 | | | | | | | | | |
| 115.fds4 | 256 | 24.5 | 79.7 | 24.3 | 80.4 | 24.2 | 80.5 | | | | | | | | | |
| 121.pop2 | 256 | 255 | 16.2 | 259 | 16.0 | 260 | 15.9 | | | | | | | | | |
| 122.tachyon | 256 | 60.4 | 46.3 | 61.0 | 45.9 | 61.0 | 45.9 | | | | | | | | | |
| 126.lammps | 256 | <u>114</u> | <u>25.5</u> | 114 | 25.6 | 117 | 24.9 | | | | | | | | | |
| 127.wrf2 | 256 | 91.2 | 85.5 | 90.9 | 85.8 | 90.8 | 85.9 | | | | | | | | | |
| 128.GAPgeomfem | 256 | 33.9 | 60.9 | 33.8 | 61.1 | 34.6 | 59.6 | | | | | | | | | |
| 129.tera_tf | 256 | 67.6 | 41.0 | 67.7 | 40.9 | 70.6 | 39.2 | | | | | | | | | |

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2680, 2.70 GHz,
DDR3-1600 MHz)

SPECmpIM_peak2007 = Not Run

SPECmpIM_base2007 = 47.8

MPI2007 license: 25

Test date: May-2012

Test sponsor: Dell

Hardware Availability: Mar-2012

Tested by: Burton Finley

Software Availability: Sep-2011

Results Table (Continued)

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|-------------|-------|---------|-------|---------|-------|---------|-------|-------|---------|-------|---------|-------|---------|-------|---------|-------|
| | Ranks | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Ranks | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 130.socorro | 256 | 58.8 | 64.9 | 58.8 | 64.9 | 61.7 | 61.9 | | | | | | | | | |
| 132.zeusmp2 | 256 | 49.9 | 62.2 | 49.9 | 62.2 | 50.2 | 61.9 | | | | | | | | | |
| 137.lu | 256 | 45.1 | 81.6 | 45.1 | 81.6 | 45.2 | 81.4 | | | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
 Compute Node: PowerEdge M620
 Interconnects: IB Switch
 Gigabit Ethernet
 File Server Node: PowerEdge R410
 Total Compute Nodes: 16
 Total Chips: 32
 Total Cores: 256
 Total Threads: 256
 Total Memory: 1 TB
 Base Ranks Run: 256
 Minimum Peak Ranks: --
 Maximum Peak Ranks: --

Software Summary

C Compiler: Intel C++ Composer XE 2011 for Linux, Version 12.0.5.220 Build 20110719
 C++ Compiler: Intel C++ Composer XE 2011 for Linux, Version 12.0.5.220 Build 20110719
 Fortran Compiler: Intel Fortran Composer XE 2011 for Linux, Version 12.0.5.220 Build 20110719
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 MPI Library: Intel MPI Library 4.0.3.008 Build 20110824 for Linux
 Other MPI Info: None
 Pre-processors: No
 Other Software: None

Node Description: PowerEdge M620

Hardware

Number of nodes: 16
 Uses of the node: compute
 Vendor: Dell
 Model: PowerEdge M620 Installed in PowerEdge M1000e blade chassis
 CPU Name: Intel Xeon E5-2680
 CPU(s) orderable: 1-2 chips
 Chips enabled: 2
 Cores enabled: 16
 Cores per chip: 8
 Threads per core: 1
 CPU Characteristics: Intel Turbo Boost Technology up to 3.5 GHz, 8.0 GT/s QPI, Hyper-Threading disabled
 CPU MHz: 2700
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip, 20 MB shared / 8 cores
 Other Cache: None
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: Seagate 146 GB SAS ST9146803SS
 Other Hardware: None
 Adapter: Onboard Intel X520-k
 Ethernet Controller
 Number of Adapters: 1

Software

Adapter: Onboard Intel X520-k
 Adapter Driver: Ethernet Controller
 3.4.8-k
 Adapter Firmware: 13.1.9
 Adapter: Mellanox ConnectX2 Quad Data Rate IB PCIe 2.0 (Installed in Fabric C)
 Adapter Driver: MLNX_OFED_LINUX-1.5.3-3.0.0-rhel6.2-x86_64
 Adapter Firmware: 2.9.1000
 Operating System: Red Hat EL 6.2, kernel 2.6.32-220.el6.x86_64
 Local File System: Linux/ext2
 Shared File System: NFS
 System State: Multi-User
 Other Software: None

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2680, 2.70 GHz,
DDR3-1600 MHz)

SPECmpM_peak2007 = Not Run

SPECmpM_base2007 = 47.8

MPI2007 license: 25

Test date: May-2012

Test sponsor: Dell

Hardware Availability: Mar-2012

Tested by: Burton Finley

Software Availability: Sep-2011

Node Description: PowerEdge M620

| | |
|---------------------|--|
| Slot Type: | PCI-Express x16 |
| Data Rate: | 1Gbps Ethernet |
| Ports Used: | 1 |
| Interconnect Type: | Ethernet |
| Adapter: | Mellanox ConnectX2 Quad Data Rate IB PCIe 2.0 (Installed in Fabric C) |
| Number of Adapters: | 1 |
| Slot Type: | PCIe x8 Gen2 |
| Data Rate: | InfiniBand 4x QDR |
| Ports Used: | 1 |
| Interconnect Type: | InfiniBand |

Node Description: PowerEdge R410

| Hardware | | Software | |
|----------------------|------------------------------------|---------------------|--|
| Number of nodes: | 1 | Adapter: | Dual port Broadcom BCM 5716 |
| Uses of the node: | fileserver | | Ethernet Controller |
| Vendor: | Intel | Adapter Driver: | 2.1.11 |
| Model: | PowerEdge R410 | Adapter Firmware: | 9-6.2.0.17.fw |
| CPU Name: | Intel Xeon X5570 CPU | Operating System: | Red Hat EL 6.2, kernel 2.6.32-220.el6.x86_64 |
| CPU(s) orderable: | 1-2 chips | Local File System: | None |
| Chips enabled: | 2 | Shared File System: | NFS |
| Cores enabled: | 8 | System State: | Multi-User |
| Cores per chip: | 4 | Other Software: | None |
| Threads per core: | 1 | | |
| CPU Characteristics: | N/A | | |
| CPU MHz: | 2930 | | |
| Primary Cache: | 32 KB I + 32 KB D on chip per core | | |
| Secondary Cache: | 256 KB I+D on chip per core | | |
| L3 Cache: | 8 MB I+D on chip per chip | | |
| Other Cache: | None | | |
| Memory: | 32 GB | | |
| Disk Subsystem: | 1 disks, 500GB/disk | | |
| Other Hardware: | None | | |
| Adapter: | Dual port Broadcom BCM 5716 | | |
| | Ethernet Controller | | |
| Number of Adapters: | 1 | | |
| Slot Type: | Integrated | | |
| Data Rate: | 1Gbps Ethernet | | |
| Ports Used: | 1 | | |
| Interconnect Type: | Ethernet | | |



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2680, 2.70 GHz,
DDR3-1600 MHz)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 47.8

MPI2007 license: 25

Test date: May-2012

Test sponsor: Dell

Hardware Availability: Mar-2012

Tested by: Burton Finley

Software Availability: Sep-2011

Interconnect Description: IB Switch

| Hardware | Software |
|--|-----------------|
| Vendor: Mellanox | |
| Model: Mellanox M3601Q | |
| Switch Model: Mellanox M3601Q Installed in PowerEdge M1000e blade chassis (Installed in slot C1) | |
| Number of Switches: 1 | |
| Number of Ports: 32 | |
| Data Rate: InfiniBand 4x QDR | |
| Firmware: 7.4.0000 | |
| Topology: Fat tree | |
| Primary Use: MPI traffic | |

Interconnect Description: Gigabit Ethernet

| Hardware | Software |
|---|-----------------|
| Vendor: Dell Inc. | |
| Model: Intel X520-k Ethernet Controller | |
| Switch Model: PowerConnect M6220 (Modular Layer 3 blade switch for PowerEdge M1000e blade chassis) in slot A1 | |
| Number of Switches: 1 | |
| Number of Ports: 20 | |
| Data Rate: 1Gbps Ethernet | |
| Firmware: 3.1.3.9 | |
| Topology: Fat tree | |
| Primary Use: Cluster File System | |

Submit Notes

The config file option 'submit' was used.

General Notes

130.socorro (base): "nullify_ptrs" src.alt was used.

MPI startup command:

mpiexec.hydra command was used to start MPI jobs.

BIOS settings:

Intel Hyper-Threading Technology (SMT): Disabled (default is Enabled)
Intel Turbo Boost Technology (Turbo) : Enabled (default is Enabled)

RAM configuration:

Compute nodes have 2x8-GB RDIMM on each memory channel.

Network:

One 20-port switch

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2680, 2.70 GHz,
DDR3-1600 MHz)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 47.8

MPI2007 license: 25

Test sponsor: Dell

Tested by: Burton Finley

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Sep-2011

General Notes (Continued)

Compute Node Environment:

ulimit -s = unlimited

ulimit -l = unlimited

File "/etc/modprobe.d/mlx4_core.conf" modified to contain "options
mlx4_core log_mtts_per_seg=5"

Base Compiler Invocation

C benchmarks:
mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:
mpiifort

Benchmarks using both Fortran and C:
mpiicc mpiifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

126.lammps: -DMPICH_IGNORE_CXX_SEEK

127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX

Base Optimization Flags

C benchmarks:
-O3 -xAVX -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xAVX -no-prec-div

Fortran benchmarks:
-O3 -xAVX -no-prec-div

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2680, 2.70 GHz,
DDR3-1600 MHz)

SPECmpIM_peak2007 = Not Run

SPECmpIM_base2007 = 47.8

MPI2007 license: 25

Test sponsor: Dell

Tested by: Burton Finley

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Sep-2011

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-O3 -xAVX -no-prec-div

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.

Report generated on Tue Jul 22 13:46:16 2014 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 8 August 2012.