



# SPEC<sup>®</sup> MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## IBM Corporation

System x3550 M2 (Intel Xeon X5570, 2.93 GHz  
SMT on, Turbo on)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 7.70

MPI2007 license: 005


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Apr-2009

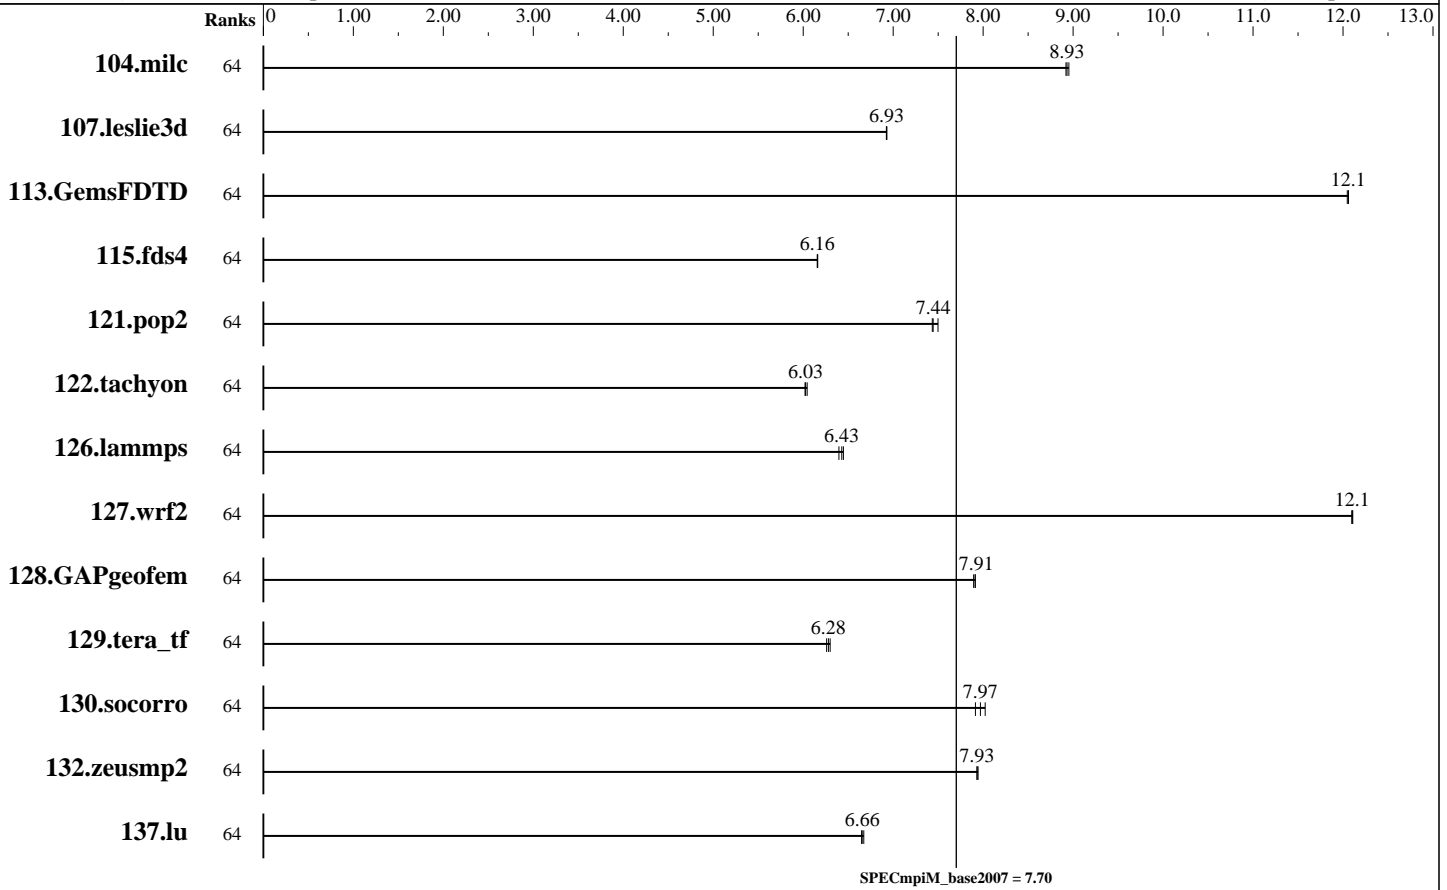

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	64	<b><u>175</u></b>	<b><u>8.93</u></b>	175	8.92	175	8.95									
107.leslie3d	64	754	6.92	753	6.93	<b><u>754</u></b>	<b><u>6.93</u></b>									
113.GemsFDTD	64	524	12.0	523	12.1	<b><u>523</u></b>	<b><u>12.1</u></b>									
115.fds4	64	<b><u>317</u></b>	<b><u>6.16</u></b>	317	6.16	317	6.16									
121.pop2	64	<b><u>555</u></b>	<b><u>7.44</u></b>	551	7.50	555	7.43									
122.tachyon	64	463	6.04	<b><u>464</u></b>	<b><u>6.03</u></b>	465	6.02									
126.lammps	64	<b><u>453</u></b>	<b><u>6.43</u></b>	456	6.40	452	6.45									
127.wrf2	64	644	12.1	<b><u>644</u></b>	<b><u>12.1</u></b>	644	12.1									
128.GAPgeofem	64	261	7.91	<b><u>261</u></b>	<b><u>7.91</u></b>	262	7.89									
129.tera_tf	64	442	6.26	439	6.30	<b><u>441</u></b>	<b><u>6.28</u></b>									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## IBM Corporation

System x3550 M2 (Intel Xeon X5570, 2.93 GHz  
SMT on, Turbo on)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 7.70

MPI2007 license: 005

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Apr-2009

### Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	64	<b>479</b>	<b>7.97</b>	476	8.02	482	7.91							
132.zeusmp2	64	391	7.93	391	7.94	<b>391</b>	<b>7.93</b>							
137.lu	64	551	6.67	553	6.65	<b>552</b>	<b>6.66</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

#### Hardware Summary

Type of System: Homogeneous  
 Compute Node: IBM System x3550 M2  
 Interconnects: InfiniBand  
 Ethernet  
 File Server Node: IBM System x346 8840  
 Head Node: IBM System x3550 M2  
 Total Compute Nodes: 4  
 Total Chips: 8  
 Total Cores: 32  
 Total Threads: 64  
 Total Memory: 96 GB  
 Base Ranks Run: 64  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

#### Software Summary

C Compiler: Intel C++ Compiler 11.0.083 for Linux  
 C++ Compiler: Intel C++ Compiler 11.0.083 for Linux  
 Fortran Compiler: Intel Fortran Compiler 11.0.083 for Linux  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: Intel MPI Library 3.2.1.009 for Linux  
 Other MPI Info: None  
 Pre-processors: No  
 Other Software: Intel MPI Library 3.2.1.009 for Linux  
 Multi-Purpose Daemon (MPD)

### Node Description: IBM System x3550 M2

#### Hardware

Number of nodes: 4  
 Uses of the node: compute, head  
 Vendor: IBM Corporation  
 Model: 7946-92U  
 CPU Name: Intel Xeon X5570  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 8  
 Cores per chip: 4  
 Threads per core: 2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz, 6.4 GT/s  
 QPI, Hyper-Threading enabled  
 CPU MHz: 2933  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip, 8 MB shared / 4 cores  
 Other Cache: None  
 Memory: 24 GB (RDIMM 6x4-GB DDR3-1333 MHz)  
 Disk Subsystem: 73.4GB 10K-rpm SAS SFF Slim-HS 2.5" HDD  
 Other Hardware: None  
 Adapter: Integrated Broadcom Corporation NetXtreme II BCM5709 Gigabit Ethernet (rev 20)

#### Software

Adapter: Integrated Broadcom Corporation NetXtreme II BCM5709 Gigabit Ethernet (rev 20)  
 Adapter Driver: bnx2 1.7.9-1  
 Adapter Firmware: 4.6.4 NCSI 1.0.6  
 Adapter: Mellanox ConnectX  
 Adapter Driver: OFED 1.4-20090301-0600  
 Adapter Firmware: 2.6.000  
 Operating System: Red Hat EL 5.3, kernel 2.6.18-128.el5  
 Local File System: Linux/ext3  
 Shared File System: NFS  
 System State: Multi-User  
 Other Software: None

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## IBM Corporation

System x3550 M2 (Intel Xeon X5570, 2.93 GHz  
SMT on, Turbo on)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 7.70

MPI2007 license: 005

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Apr-2009

### Node Description: IBM System x3550 M2

Number of Adapters:	1
Slot Type:	PCIe x16 Gen2
Data Rate:	10/100/1000
Ports Used:	1
Interconnect Type:	Ethernet
Adapter:	Mellanox ConnectX
Number of Adapters:	1
Slot Type:	PCIe x16 Gen2
Data Rate:	InfiniBand 4x DDR
Ports Used:	1
Interconnect Type:	InfiniBand

### General Notes

#### BIOS settings notes:

Intel Hyper-Threading Technology (SMT): Enabled  
Intel Turbo Boost Technology (Turbo) : Enabled

RAM configuration notes: Each compute node has  
1x4-GB RDIMM on each memory channel.

### Node Description: IBM System x346 8840

#### Hardware

Number of nodes:	1
Uses of the node:	fileserver
Vendor:	IBM Corporation
Model:	884045Y
CPU Name:	Intel Xeon EM64T
CPU(s) orderable:	2 chips
Chips enabled:	2
Cores enabled:	2
Cores per chip:	1
Threads per core:	1
CPU Characteristics:	800 MHz FSB
CPU MHz:	3600
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	4 GB
Disk Subsystem:	SCSI
Other Hardware:	None
Adapter:	Integrated Broadcom Corporation NetXtreme BCM5721 Gigabit Ethernet PCI Express (rev 11)
Number of Adapters:	1
Slot Type:	PCI-X
Data Rate:	10/100/1000

#### Software

Adapter:	Integrated Broadcom Corporation NetXtreme BCM5721 Gigabit Ethernet PCI Express (rev 11)
Adapter Driver:	tg3 3.86
Adapter Firmware:	5721-v3.29a, ASFIPMI v6.08
Operating System:	Red Hat EL 5.2, kernel 2.6.18-92.el5
Local File System:	None
Shared File System:	NFS
System State:	Multi-User
Other Software:	None

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## IBM Corporation

System x3550 M2 (Intel Xeon X5570, 2.93 GHz  
SMT on, Turbo on)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 7.70

MPI2007 license: 005

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Apr-2009

### Node Description: IBM System x346 8840

Ports Used: 1  
Interconnect Type: Ethernet

### Interconnect Description: InfiniBand

Hardware	
Vendor:	Voltaire
Model:	24 4X DDR port Bundle
Switch Model:	ISR 9024D-M
Number of Switches:	1
Number of Ports:	24
Data Rate:	4X DDR
Firmware:	1.0.0
Topology:	Single Switch
Primary Use:	MPI traffic

Software

### Interconnect Description: Ethernet

Hardware	
Vendor:	Cisco
Model:	3750G
Switch Model:	WS-C3750G-24TS-E1U
Number of Switches:	1
Number of Ports:	28
Data Rate:	Full duplex 1000
Firmware:	12.2 (35SE5)
Topology:	Single Switch
Primary Use:	File system traffic

Software

### Submit Notes

The config file option 'submit' was used.  
submit = mpiexec -genv -np \$ranks \$command

### Base Compiler Invocation

C benchmarks:  
mpiicc

C++ benchmarks:

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**IBM Corporation**

SPECmpiM\_peak2007 = Not Run

System x3550 M2 (Intel Xeon X5570, 2.93 GHz  
SMT on, Turbo on)

SPECmpiM\_base2007 = 7.70

MPI2007 license: 005

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Apr-2009

## Base Compiler Invocation (Continued)

126.lammps: mpiicpc

Fortran benchmarks:

mpiifort

Benchmarks using both Fortran and C:

mpiicc mpiifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK

127.wf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX

## Base Optimization Flags

C benchmarks:

-O3 -xSSE4.2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xSSE4.2 -no-prec-div

Fortran benchmarks:

-O3 -xSSE4.2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xSSE4.2 -no-prec-div

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/results/flags/EM64T\\_Intel111\\_flags.20100413.00.html](http://www.spec.org/mpi2007/results/flags/EM64T_Intel111_flags.20100413.00.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/results/flags/EM64T\\_Intel111\\_flags.20100413.00.xml](http://www.spec.org/mpi2007/results/flags/EM64T_Intel111_flags.20100413.00.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v1.1.

Report generated on Tue Apr 13 15:11:22 2010 by SPEC MPI2007 PS/PDF formatter v1422.