SPEC® MPIL2007 Result

SGI

SGI Altix ICE 8400EX
(Intel Xeon X5690, 3.46 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 3.26

MPI2007 license:	4	**Test date:**	Jun-2011
Test sponsor:	SGI	**Hardware Availability:**	Feb-2011
Tested by:	SGI	**Software Availability:**	Aug-2011

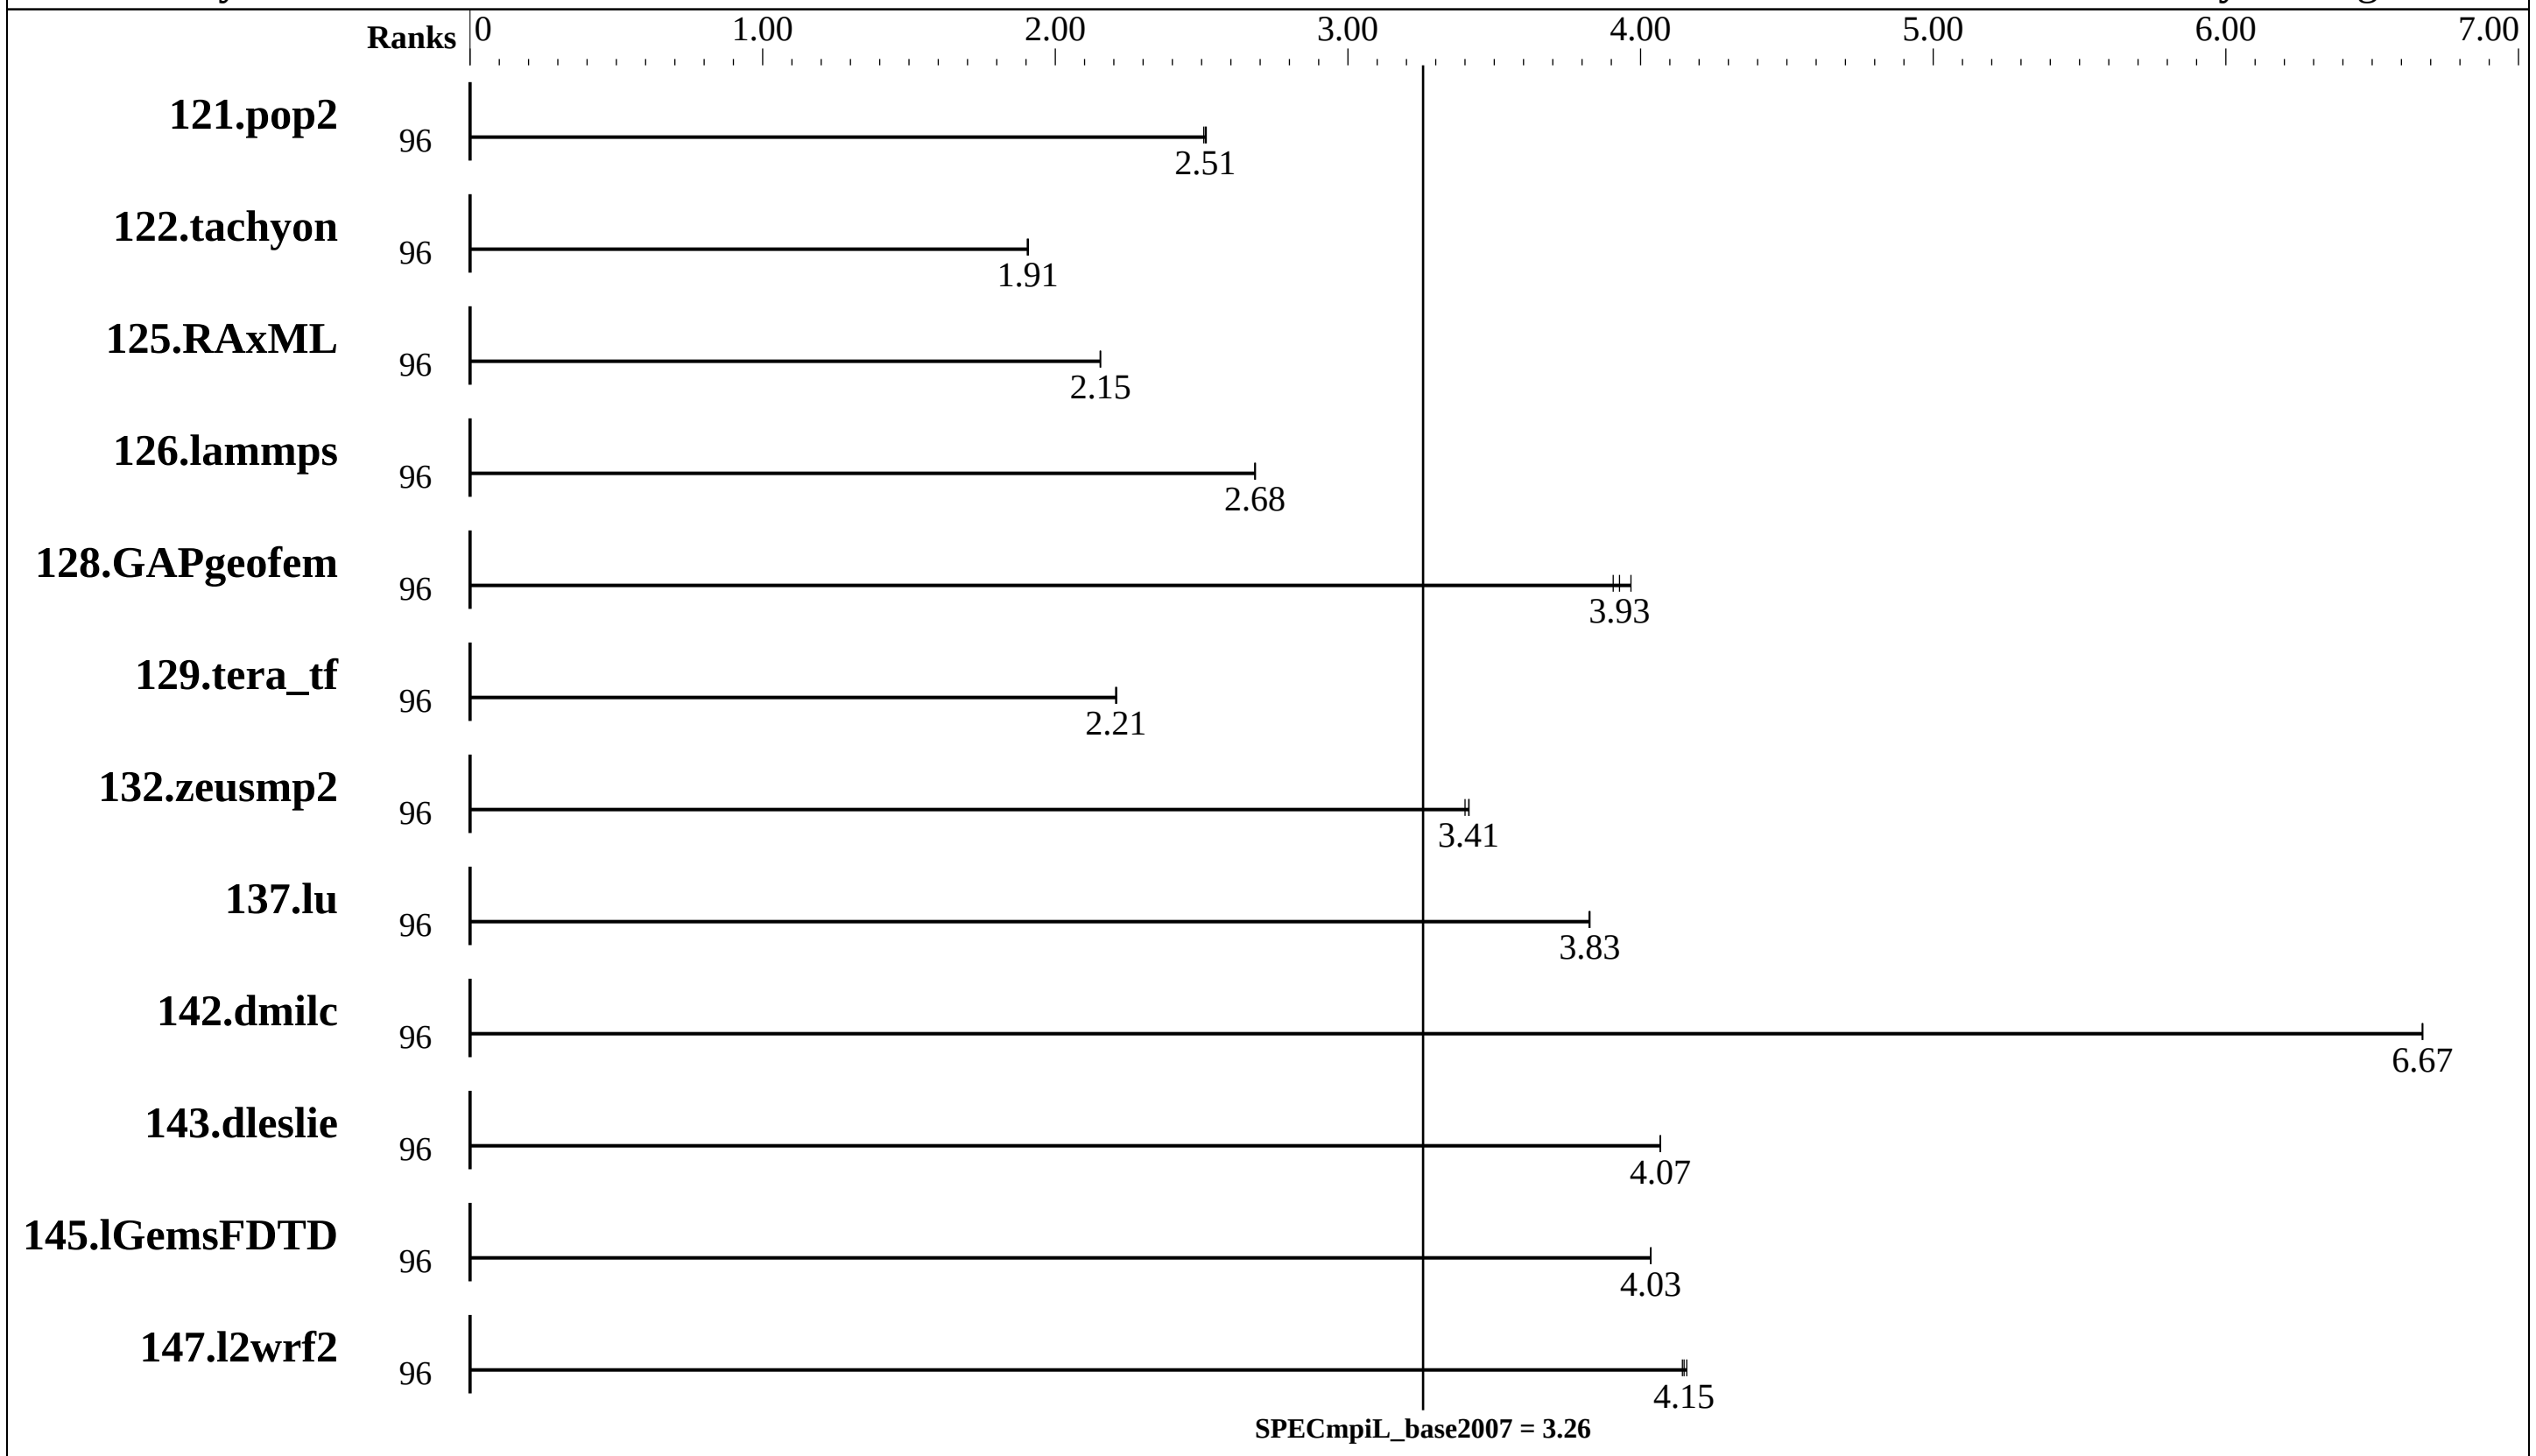

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	96	**1548**	**2.51**	1552	2.51	1547	2.52							
122.tachyon	96	1021	1.90	1019	1.91	**1020**	**1.91**							
125.RAxML	96	**1355**	**2.15**	1356	2.15	1355	2.15							
126.lammps	96	**917**	**2.68**	917	2.68	916	2.68							
128.GAPgeofem	96	1519	3.91	**1511**	**3.93**	1496	3.97							
129.tera_tf	96	498	2.21	**498**	**2.21**	497	2.21							
132.zeusmp2	96	621	3.41	**621**	**3.41**	624	3.40							
137.lu	96	1099	3.82	**1098**	**3.83**	1098	3.83							
142.dmilc	96	552	6.67	552	6.67	**552**	**6.67**							
143.dleslie	96	762	4.07	762	4.07	**762**	**4.07**							
145.lGemsFDTD	96	**1093**	**4.03**	1093	4.03	1093	4.04							
147.l2wrf2	96	**1977**	**4.15**	1980	4.14	1973	4.16							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC MPIL2007 Result

SGI

SGI Altix ICE 8400EX
(Intel Xeon X5690, 3.46 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 3.26

MPI2007 license:	4	**Test date:**	Jun-2011
Test sponsor:	SGI	**Hardware Availability:**	Feb-2011
Tested by:	SGI	**Software Availability:**	Aug-2011

Hardware Summary

Type of System:	Homogeneous
Compute Node:	SGI Altix ICE 8400EX Compute Node
Interconnect:	InfiniBand (MPI and I/O)
File Server Node:	SGI InfiniteStorage Nexis 2000 NAS
Total Compute Nodes:	8
Total Chips:	16
Total Cores:	96
Total Threads:	192
Total Memory:	192 GB
Base Ranks Run:	96
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

Software Summary

C Compiler:	Intel C++ Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309
C++ Compiler:	Intel C++ Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309
Fortran Compiler:	Intel Fortran Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309
Base Pointers:	64-bit
Peak Pointers:	64-bit
MPI Library:	SGI MPT 2.04 Patch 10789
Other MPI Info:	OFED 1.4.2
Pre-processors:	None
Other Software:	None

Node Description: SGI Altix ICE 8400EX Compute Node

Hardware

Number of nodes:	8
Uses of the node:	compute
Vendor:	SGI
Model:	SGI Altix ICE 8400EX (Intel Xeon X5690, 3.46 GHz)
CPU Name:	Intel Xeon X5690
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	12
Cores per chip:	6
Threads per core:	2
CPU Characteristics:	Six Core, 3.46 GHz, 6.4 GT/s QPI Intel Turbo Boost Technology up to 3.73 GHz Hyper-Threading Technology enabled
CPU MHz:	3467
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	None
Other Hardware:	None
Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Number of Adapters:	2
Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x QDR
Ports Used:	1
Interconnect Type:	InfiniBand

Software

Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Adapter Driver:	OFED-1.4.2
Adapter Firmware:	2.7.8200
Operating System:	SUSE Linux Enterprise Server 11 SP1, Kernel 2.6.32.13-0.4-default
Local File System:	NFSv3
Shared File System:	NFSv3 IPoIB
System State:	Multi-user, run level 3
Other Software:	SGI ProPack 7SP1 for Linux, Build 701r3.sles11-1005252113 SGI Tempo Compute Node 2.1, Build 701r3.sles11-1005252113

SPEC MPIL2007 Result

SGI

SGI Altix ICE 8400EX
(Intel Xeon X5690, 3.46 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 3.26

MPI2007 license: 4
Test sponsor: SGI
Tested by: SGI
Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Aug-2011

Node Description: SGI InfiniteStorage Nexis 2000 NAS

Hardware

Number of nodes:	1
Uses of the node:	fileserver
Vendor:	SGI
Model:	SGI Altix XE 270 (Intel Xeon X5670, 2.93 GHz)
CPU Name:	Intel Xeon X5670
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	12
Cores per chip:	6
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz Hyper-Threading Technology enabled
CPU MHz:	2933
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per chip
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12*8 GB DDR3-1333 CL9 DIMMs)
Disk Subsystem:	8.8 TB RAID 5 60 x 146 GB SAS (Seagate Cheetah 15K.5)
Other Hardware:	None
Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Number of Adapters:	2
Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x QDR
Ports Used:	2
Interconnect Type:	InfiniBand

Software

Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Adapter Driver:	OFED-1.4.0
Adapter Firmware:	2.7.0
Operating System:	SUSE Linux Enterprise Server 11 (x86_64) Kernel 2.6.27.19-5-default
Local File System:	xfs
Shared File System:	--
System State:	Multi-user, run level 3
Other Software:	SGI Foundation Software 2, Build 700r3.sles11-1004061553

Interconnect Description: InfiniBand (MPI and I/O)

Hardware

Vendor:	Mellanox Technologies and SGI
Model:	None
Switch Model:	SGI QDR_1.5_HYPR_2454 with Mellanox Device 48438 (Infiniscale IV)
Number of Switches:	2
Number of Ports:	36
Data Rate:	InfiniBand 4x QDR
Firmware:	5040005
Topology:	Enhanced Hypercube
Primary Use:	MPI and I/O traffic

Software

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
Software environment:
  export MPI_REQUEST_MAX=65536
  export MPI_TYPE_MAX=32768
  export MPI_BUFS_THRESHOLD=1
  export MPI_IB_RAILS=2
  ulimit -s unlimited

BIOS settings:
  AMI BIOS version 080016
  Hyper-Threading Technology enabled (default)
  Intel Turbo Boost Technology enabled (default)
  Intel Turbo Boost Technology activated in the OS via
    /etc/init.d/acpid start
    /etc/init.d/powersaved start
    powersave -f

Job Placement:
  Each MPI job was assigned to a topologically compact set
  of nodes, i.e. the minimal needed number of switches was
  used for each job: 2 switches for 96 ranks,
  4 switches for 192 ranks, 8 switches for 384 ranks,
  16 switches for 768 ranks, 32 switches for 1536 ranks.

Additional notes regarding interconnect:
  The Infiniband network consists of two independent planes,
  with half the switches in the system allocated to each plane.
  I/O traffic is restricted to one plane, while MPI traffic can
  use both planes.
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:

126.lammps: `icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Base Portability Flags

121.pop2: `-DSPEC_MPI_CASE_FLAG`

Base Optimization Flags

C benchmarks:
`-O3 -xSSE4.2 -no-prec-div`

C++ benchmarks:

126.lammps: `-O3 -xSSE4.2 -no-prec-div -ansi-alias`

Fortran benchmarks:
`-O3 -xSSE4.2 -no-prec-div`

Benchmarks using both Fortran and C:
`-O3 -xSSE4.2 -no-prec-div`

Base Other Flags

C benchmarks:
`-lmpi`

C++ benchmarks:

126.lammps: `-lmpi`

Fortran benchmarks:
`-lmpi`

Benchmarks using both Fortran and C:
`-lmpi`

The flags file that was used to format this result can be browsed at
http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel12_flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel12_flags.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.
Report generated on Tue Jul 22 13:43:19 2014 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 14 July 2011.