



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiM\_peak2007 = 43.4

SPECmpiM\_base2007 = 40.4

MPI2007 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

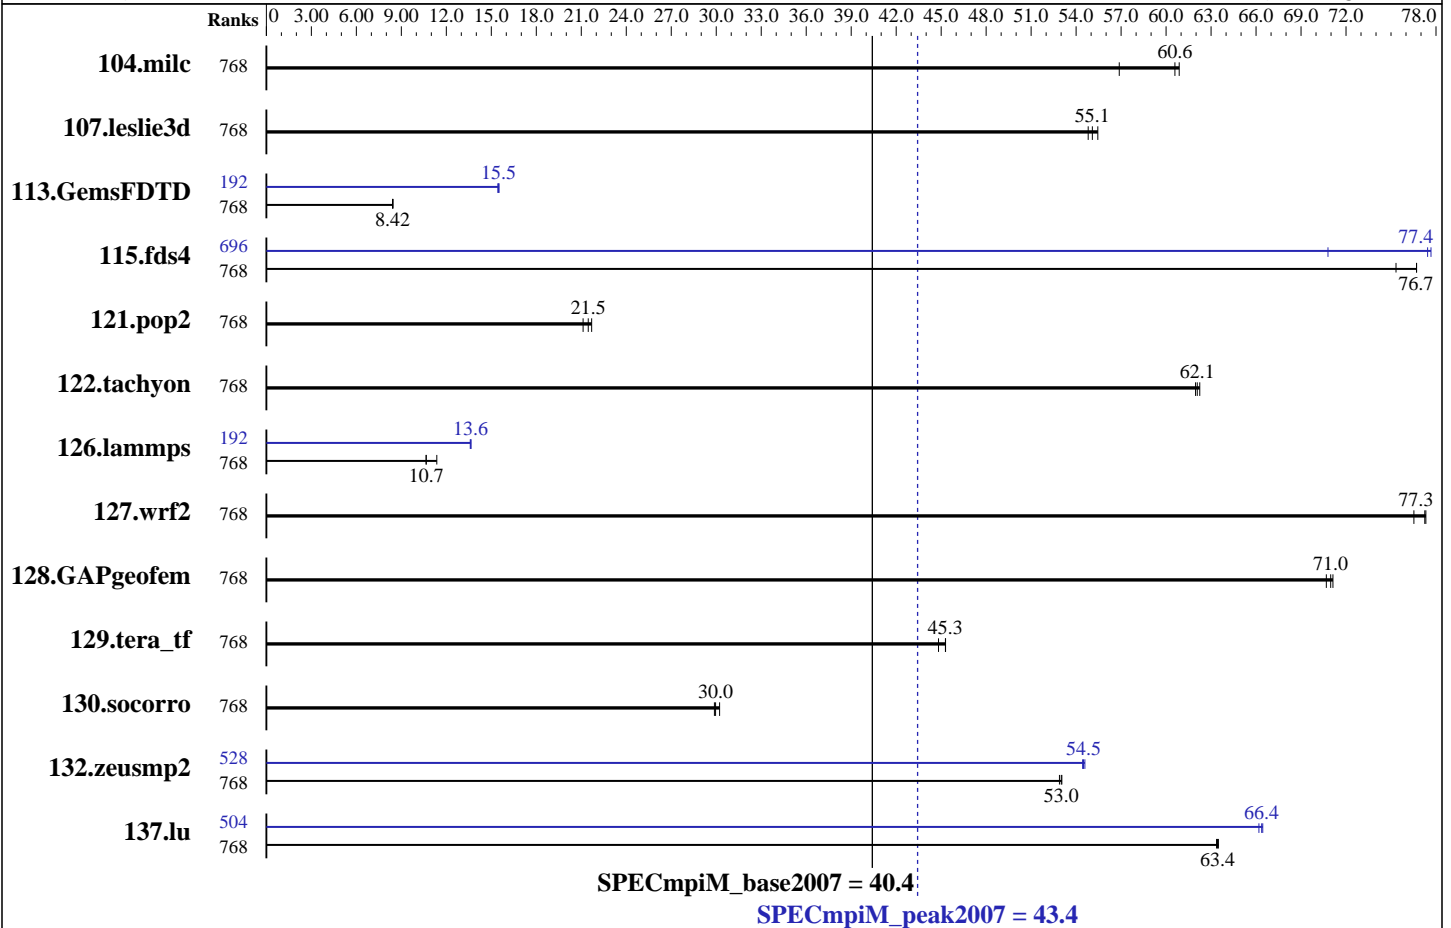

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	768	27.5	56.9	<b><u>25.8</u></b>	<b><u>60.6</u></b>	25.7	60.9	768	27.5	56.9	<b><u>25.8</u></b>	<b><u>60.6</u></b>	25.7	60.9		
107.leslie3d	768	95.2	54.8	94.1	55.4	<b><u>94.8</u></b>	<b><u>55.1</u></b>	768	95.2	54.8	94.1	55.4	<b><u>94.8</u></b>	<b><u>55.1</u></b>		
113.GemsFDTD	768	747	8.45	749	8.42	<b><u>749</u></b>	<b><u>8.42</u></b>	192	409	15.4	<b><u>407</u></b>	<b><u>15.5</u></b>	407	15.5		
115.fds4	768	25.4	76.7	<b><u>25.4</u></b>	<b><u>76.7</u></b>	25.9	75.3	696	27.6	70.8	25.1	77.7	<b><u>25.2</u></b>	<b><u>77.4</u></b>		
121.pop2	768	<b><u>192</u></b>	<b><u>21.5</u></b>	190	21.7	195	21.1	768	<b><u>192</u></b>	<b><u>21.5</u></b>	190	21.7	195	21.1		
122.tachyon	768	45.1	62.0	<b><u>45.1</u></b>	<b><u>62.1</u></b>	44.9	62.2	768	45.1	62.0	<b><u>45.1</u></b>	<b><u>62.1</u></b>	44.9	62.2		
126.lammps	768	256	11.4	274	10.7	<b><u>273</u></b>	<b><u>10.7</u></b>	192	214	13.6	<b><u>214</u></b>	<b><u>13.6</u></b>	214	13.6		
127.wrf2	768	102	76.5	101	77.3	<b><u>101</u></b>	<b><u>77.3</u></b>	768	102	76.5	101	77.3	<b><u>101</u></b>	<b><u>77.3</u></b>		
128.GAPgeofem	768	29.0	71.1	<b><u>29.1</u></b>	<b><u>71.0</u></b>	29.2	70.7	768	29.0	71.1	<b><u>29.1</u></b>	<b><u>71.0</u></b>	29.2	70.7		
129.tera_tf	768	<b><u>61.1</u></b>	<b><u>45.3</u></b>	61.1	45.3	61.8	44.8	768	<b><u>61.1</u></b>	<b><u>45.3</u></b>	61.1	45.3	61.8	44.8		

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiM\_peak2007 = 43.4

SPECmpiM\_base2007 = 40.4

MPI2007 license: 4  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2011  
Hardware Availability: Mar-2011  
Software Availability: Aug-2011

### Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	768	<u>127</u>	<u>30.0</u>	126	30.2	128	29.9	768	<u>127</u>	<u>30.0</u>	126	30.2	128	29.9
132.zeusmp2	768	58.5	53.0	<u>58.5</u>	<u>53.0</u>	58.7	52.9	528	57.0	54.4	<u>56.9</u>	<u>54.5</u>	56.8	54.6
137.lu	768	<u>58.0</u>	<u>63.4</u>	58.0	63.4	57.9	63.5	504	55.5	66.2	55.3	66.4	<u>55.4</u>	<u>66.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

#### Hardware Summary

Type of System: Homogeneous  
 Compute Node: SGI Altix ICE 8400EX Compute Node  
 Interconnect: InfiniBand (MPI and I/O)  
 File Server Node: SGI InfiniteStorage 4000  
 Total Compute Nodes: 32  
 Total Chips: 64  
 Total Cores: 768  
 Total Threads: 768  
 Total Memory: 2 TB  
 Base Ranks Run: 768  
 Minimum Peak Ranks: 192  
 Maximum Peak Ranks: 768

#### Software Summary

C Compiler: Intel C Compiler for Linux  
 Version 11.1, Build 20100806  
 C++ Compiler: Intel C++ Compiler for Linux  
 Version 11.1, Build 20100806  
 Fortran Compiler: Intel Fortran Compiler for Linux  
 Version 11.1, Build 20100806  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: SGI MPT 2.04 Patch 10789  
 Other MPI Info: OFED 1.4.2  
 Pre-processors: None  
 Other Software: None

### Node Description: SGI Altix ICE 8400EX Compute Node

#### Hardware

Number of nodes: 32  
 Uses of the node: compute  
 Vendor: SGI  
 Model: SGI Altix ICE 8400EX (AMD Opteron 6180 SE, 2.5GHz)  
 CPU Name: AMD Opteron 6180 SE  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 24  
 Cores per chip: 12  
 Threads per core: 1  
 CPU Characteristics: 12 Cores/chip, 2.5 GHz  
 CPU MHz: 2500  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB, 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: None  
 Other Hardware: None  
 Adapter: Mellanox MT26428 ConnectX IB QDR  
 (PCIe x8 Gen2 5 GT/s)  
 Number of Adapters: 1  
 Slot Type: PCIe x8 Gen2  
 Data Rate: InfiniBand 4x QDR

#### Software

Adapter: Mellanox MT26428 ConnectX IB QDR  
 (PCIe x8 Gen2 5 GT/s)  
 Adapter Driver: OFED-1.4.2  
 Adapter Firmware: 2.7.0  
 Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64)  
 Kernel 2.6.32.27-0.2-default  
 Local File System: NFSv3  
 Shared File System: NFSv3 IPoIB  
 System State: Run Level 3 (Multi-User)  
 Other Software: SGI Performance Suite 1.0,  
 Build 702r19.sles11-1010072114  
 SGI Tempo Compute Node 2.2,  
 Build 702r19.sles11-1010072114

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpim\_peak2007 = 43.4

SPECmpim\_base2007 = 40.4

MPI2007 license: 4  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2011  
Hardware Availability: Mar-2011  
Software Availability: Aug-2011

### Node Description: SGI Altix ICE 8400EX Compute Node

Ports Used: 2  
Interconnect Type: InfiniBand

### Node Description: SGI InfiniteStorage 4000

#### Hardware

Number of nodes: 1  
Uses of the node: fileserver  
Vendor: SGI  
Model: SGI Altix 450 (Intel Itanium 2, 1.6GHz)  
CPU Name: Intel Itanium 2 9030  
CPU(s) orderable: 2-38 chips  
Chips enabled: 2  
Cores enabled: 4  
Cores per chip: 2  
Threads per core: 1  
CPU Characteristics: 1.6GHz/8MB, 533MHz FSB  
CPU MHz: 1600  
Primary Cache: 16 KB I + 16 KB D on chip per core  
Secondary Cache: 1 MB I + 256 KB D on chip per core  
L3 Cache: 4 MB I+D on chip per core  
Other Cache: None  
Memory: 24 GB (12 x 2 GB, 2Rx4 PC2-3200-3, ECC)  
Disk Subsystem: 16 TB RAID 5  
32 x 500 GB SATA (Seagate Barracuda 7.2K)  
Other Hardware: None  
Adapter: Mellanox MT25208 InfiniHost III Ex  
(PCIe x8 Gen1 2.5 GT/s)  
Number of Adapters: 2  
Slot Type: PCIe x8 Gen1  
Data Rate: InfiniBand 4x DDR  
Ports Used: 2  
Interconnect Type: InfiniBand

#### Software

Adapter: Mellanox MT25208 InfiniHost III Ex  
(PCIe x8 Gen1 2.5 GT/s)  
Adapter Driver: OFED-1.4.2  
Adapter Firmware: 5.3.0  
Operating System: SUSE Linux Enterprise Server 11 SP1 (ia64)  
Kernel 2.6.32.12-0.7-default  
Local File System: xfs  
Shared File System: --  
System State: Run Level 3 (Multi-User)  
Other Software: SGI ProPack 7SP1 for Linux,  
Build 701r2.sles11-1005242307

### Interconnect Description: InfiniBand (MPI and I/O)

#### Hardware

Vendor: Mellanox Technologies and SGI  
Model: None  
Switch Model: SGI QDR\_1.5\_HYPR\_2454 with Mellanox Device 48438  
(Infiniscale IV)  
Number of Switches: 4  
Number of Ports: 36  
Data Rate: InfiniBand 4x QDR  
Firmware: 5040005  
Topology: Enhanced Hypercube

#### Software

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiM\_peak2007 = 43.4

SPECmpiM\_base2007 = 40.4

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

## Interconnect Description: InfiniBand (MPI and I/O)

Primary Use: MPI and I/O traffic

## Submit Notes

The config file option 'submit' was used.

## General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_BUFS_THRESHOLD=1
ulimit -s unlimited
```

BIOS settings:

AMI BIOS version 1.0a

Job Placement:

Each MPI job is assigned to a topologically compact set of nodes, i.e. the minimal needed number of switches was used for each job: 1 switch for up to 192 ranks, 2 switches for 384 ranks, 4 switches for 768 ranks, 8 switches for 1536 ranks and 16 switches for 3072 ranks.

Peak run:

In the peak run, some benchmarks used different number of ranks from base. It is the only difference between base and peak.

## Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

126.lammps: icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**SGI**

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

**SPECmpiM\_peak2007 = 43.4**

**SPECmpiM\_base2007 = 40.4**

**MPI2007 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Jun-2011

**Hardware Availability:** Mar-2011

**Software Availability:** Aug-2011

## Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG  
127.wrf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX

## Base Optimization Flags

C benchmarks:

-O3 -xSSE2 -ipo -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xSSE2 -ipo -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xSSE2 -ipo -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xSSE2 -ipo -no-prec-div

## Peak Optimization Flags

C benchmarks:

104.milc: basepeak = yes

122.tachyon: basepeak = yes

C++ benchmarks:

126.lammps: -O3 -xSSE2 -ipo -no-prec-div -ansi-alias

Fortran benchmarks:

107.leslie3d: basepeak = yes

113.GemsFDTD: -O3 -xSSE2 -ipo -no-prec-div

129.tera\_tf: basepeak = yes

137.lu: Same as 113.GemsFDTD

Benchmarks using both Fortran and C:

115.fds4: -O3 -xSSE2 -ipo -no-prec-div

121.pop2: basepeak = yes

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiM\_peak2007 = 43.4

SPECmpiM\_base2007 = 40.4

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

## Peak Optimization Flags (Continued)

127.wrf2: basepeak = yes

128.GAPgeofem: basepeak = yes

130.socorro: basepeak = yes

132.zeusmp2: Same as 115.fds4

## Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel111\\_flags.20120720.00.html](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel111_flags.20120720.00.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel111\\_flags.20120720.00.xml](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel111_flags.20120720.00.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.  
Report generated on Tue Jul 22 13:43:26 2014 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 14 July 2011.