SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

NEC

NEC HPC1812Rg-2 (Intel Xeon E5-2650 v4, 2.20 GHz, DDR4-2400 MHz, SMT ON, Turbo ON)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 33.5

MPI2007 license: 055A
Test sponsor: RWTH University Aachen
Tested by: Bo Wang

Test date: Sep-2017
Hardware Availability: Oct-2016
Software Availability: Oct-2016

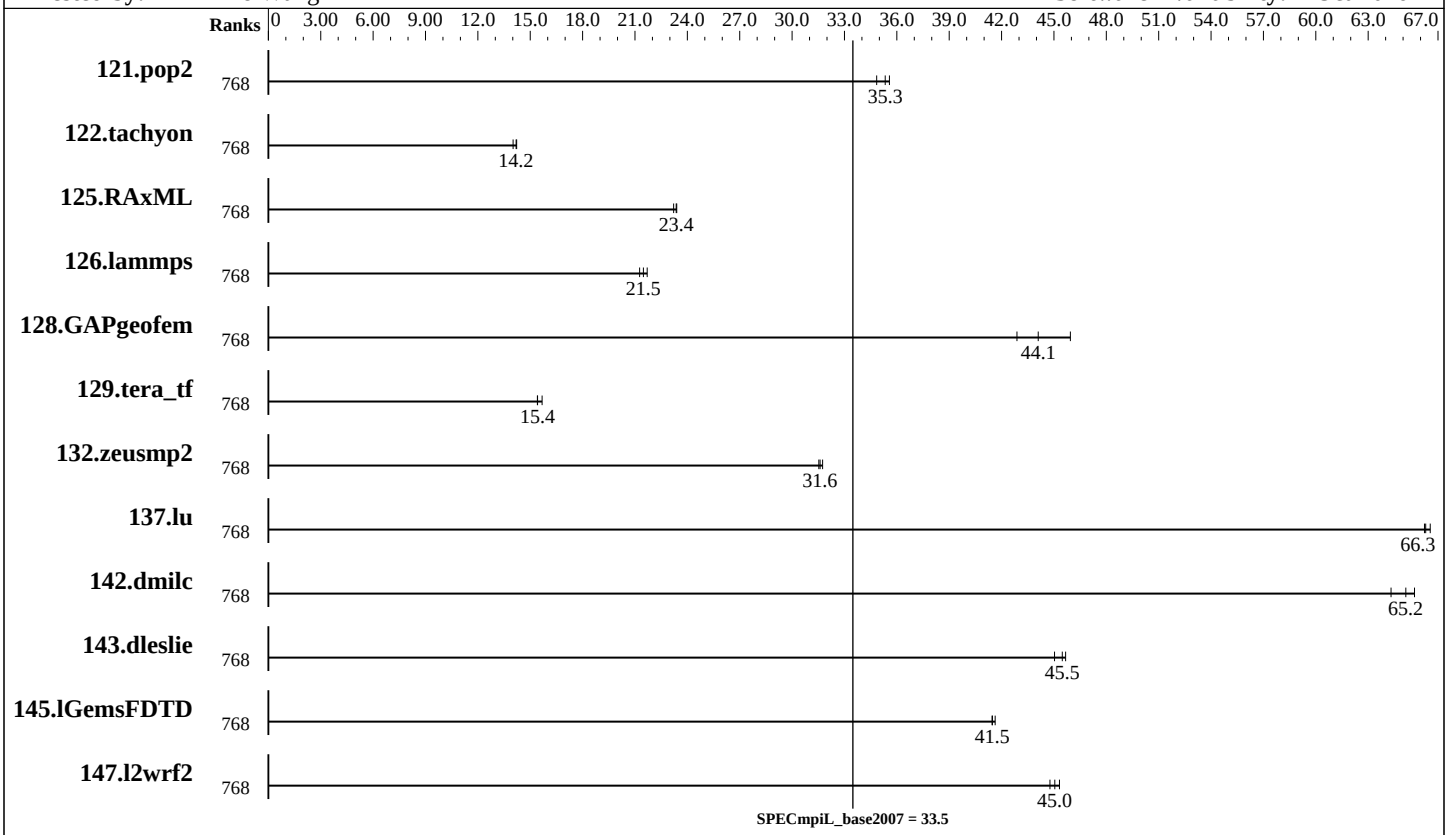

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	768	112	34.8	**110**	**35.3**	109	35.6							
122.tachyon	768	**137**	**14.2**	137	14.2	139	14.0							
125.RAxML	768	**125**	**23.4**	125	23.4	126	23.2							
126.lammps	768	**114**	**21.5**	116	21.3	113	21.7							
128.GAPgeofem	768	138	42.9	**135**	**44.1**	129	45.9							
129.tera_tf	768	70.1	15.7	**71.3**	**15.4**	71.3	15.4							
132.zeusmp2	768	66.8	31.7	67.2	31.5	**67.1**	**31.6**							
137.lu	768	63.1	66.6	**63.4**	**66.3**	63.5	66.2							
142.dmilc	768	57.3	64.3	**56.5**	**65.2**	56.1	65.7							
143.dleslie	768	68.8	45.0	67.9	45.7	**68.2**	**45.5**							
145.lGemsFDTD	768	**106**	**41.5**	106	41.6	106	41.5							
147.l2wrf2	768	181	45.3	**182**	**45.0**	183	44.8							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

NEC

NEC HPC1812Rg-2 (Intel Xeon E5-2650 v4, 2.20 GHz, DDR4-2400 MHz, SMT ON, Turbo ON)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 33.5

MPI2007 license: 055A
Test sponsor: RWTH University Aachen
Tested by: Bo Wang

Test date: Sep-2017
Hardware Availability: Oct-2016
Software Availability: Oct-2016

Hardware Summary

Type of System:	Homogeneous
Compute Node:	NEC HPC
Interconnects:	Omni-Path Architecture Gigabit Ethernet
File Server Node:	NFS
Total Compute Nodes:	32
Total Chips:	64
Total Cores:	768
Total Threads:	1536
Total Memory:	4 TB
Base Ranks Run:	768
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

Software Summary

C Compiler:	Intel C++ Composer XE 2017 for Linux, Version 17.0.2.174
C++ Compiler:	Intel C++ Composer XE 2017 for Linux, Version 17.0.2.174
Fortran Compiler:	Intel Fortran Composer XE 2017 for Linux, Version 17.0.2.174
Base Pointers:	64-bit
Peak Pointers:	64-bit
MPI Library:	Intel MPI Library 2017 for Linux, Version 2017.1.132
Other MPI Info:	None
Pre-processors:	No
Other Software:	None

Node Description: NEC HPC

Hardware

Number of nodes:	32
Uses of the node:	compute
Vendor:	Intel
Model:	NEC HPC 1812Rg
CPU Name:	Intel Xeon E5-2650 v4
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	24
Cores per chip:	12
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.9 GHz (single)/2.2 GHz (all), 9.6 GT/s QPI, Hyper-Threading enabled
CPU MHz:	2200
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip shared / 12 cores
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx8 PC4-2400T-R)
Disk Subsystem:	SATA, Samsung SM863, 120GB, SSD
Other Hardware:	None
Adapter:	Intel Omni-Path Host Fabric Interface Adapter 100 Series 1 Port PCIe X8
Number of Adapters:	1
Slot Type:	PCI-E x8
Data Rate:	58Gb/s
Ports Used:	1
Interconnect Type:	Omni-Path

Software

Adapter:	Intel Omni-Path Host Fabric Interface Adapter 100 Series 1 Port PCIe X8
Adapter Driver:	hfi1
Adapter Firmware:	2.33.5100
Operating System:	CentOS Linux release 7.3.1611 (Core)
Local File System:	Linux/xfs
Shared File System:	NFS
System State:	Multi-User
Other Software:	None

SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

NEC

NEC HPC1812Rg-2 (Intel Xeon E5-2650 v4, 2.20 GHz, DDR4-2400 MHz, SMT ON, Turbo ON)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 33.5

MPI2007 license: 055A
Test sponsor: RWTH University Aachen
Tested by: Bo Wang

Test date: Sep-2017
Hardware Availability: Oct-2016
Software Availability: Oct-2016

Node Description: NFS

Hardware

Number of nodes:	1
Uses of the node:	fileserver
Vendor:	NETAPP
Model:	FAS6240
CPU Name:	Intel Xeon CPU X5670
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	12
Cores per chip:	6
Threads per core:	2
CPU Characteristics:	None
CPU MHz:	2930
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB
Disk Subsystem:	216 disks, 2 TB/disk, 432TB total
Other Hardware:	None
Adapter:	10 Gigabit Ethernet Controller IX1-SFP+
Number of Adapters:	2
Slot Type:	PCI-Express x8
Data Rate:	10Gbps Ethernet
Ports Used:	2
Interconnect Type:	Ethernet

Software

Adapter:	10 Gigabit Ethernet Controller IX1-SFP+
Adapter Driver:	N/A
Adapter Firmware:	1.8-0
Operating System:	NetApp Release 8.2.3P2 7-Mode
Local File System:	None
Shared File System:	NFS
System State:	Multi-User
Other Software:	None

Interconnect Description: Omni-Path Architecture

Hardware

Vendor:	Intel
Model:	Intel Omni-Path 100 Series
Switch Model:	Intel Omni-Path 100 Series
Number of Switches:	25
Number of Ports:	48
Data Rate:	100Gbps
Firmware:	10.3.0.0.81
Topology:	2:1 Blocking Fat tree
Primary Use:	MPI traffic

Software

Interconnect Description: Gigabit Ethernet

Hardware		Software
Vendor:	Cisco	
Model:	Ethernet 40 Gbps	
Switch Model:	Cisco Nexus5020, N5K-C5020P-BF	
Number of Switches:	1	
Number of Ports:	96	
Data Rate:	40Gbps	
Firmware:	5.2(1)N1(9a)	
Topology:	Star	
Primary Use:	Cluster File System	

Submit Notes

```
The config file option 'submit' was used.
```

Base Compiler Invocation

C benchmarks:
`mpiicc`

C++ benchmarks:

126.lammps: `mpiicpc`

Fortran benchmarks:
`mpiifort`

Benchmarks using both Fortran and C:
`mpiicc mpiifort`

Base Portability Flags

121.pop2: `-DSPEC_MPI_CASE_FLAG`
126.lammps: `-DMPICH_IGNORE_CXX_SEEK`

Base Optimization Flags

C benchmarks:
`-O3 -xCORE-AVX2 -no-prec-div`

C++ benchmarks:

Continued on next page

Base Optimization Flags (Continued)

126.lammps: `-O3 -xCORE-AVX2 -no-prec-div`

Fortran benchmarks:
`-O3 -xCORE-AVX2 -no-prec-div`

Benchmarks using both Fortran and C:
`-O3 -xCORE-AVX2 -no-prec-div`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/mpi2007/flags/RWTH-Aachen-CLAIX-MPI-2017-SEP.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/mpi2007/flags/RWTH-Aachen-CLAIX-MPI-2017-SEP.xml`

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.
Report generated on Wed Oct 4 12:53:49 2017 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 4 October 2017.