SPEC® MPIL2007 Result

Hewlett Packard Enterprise

SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 9.53

MPI2007 license: 1
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Nov-2017

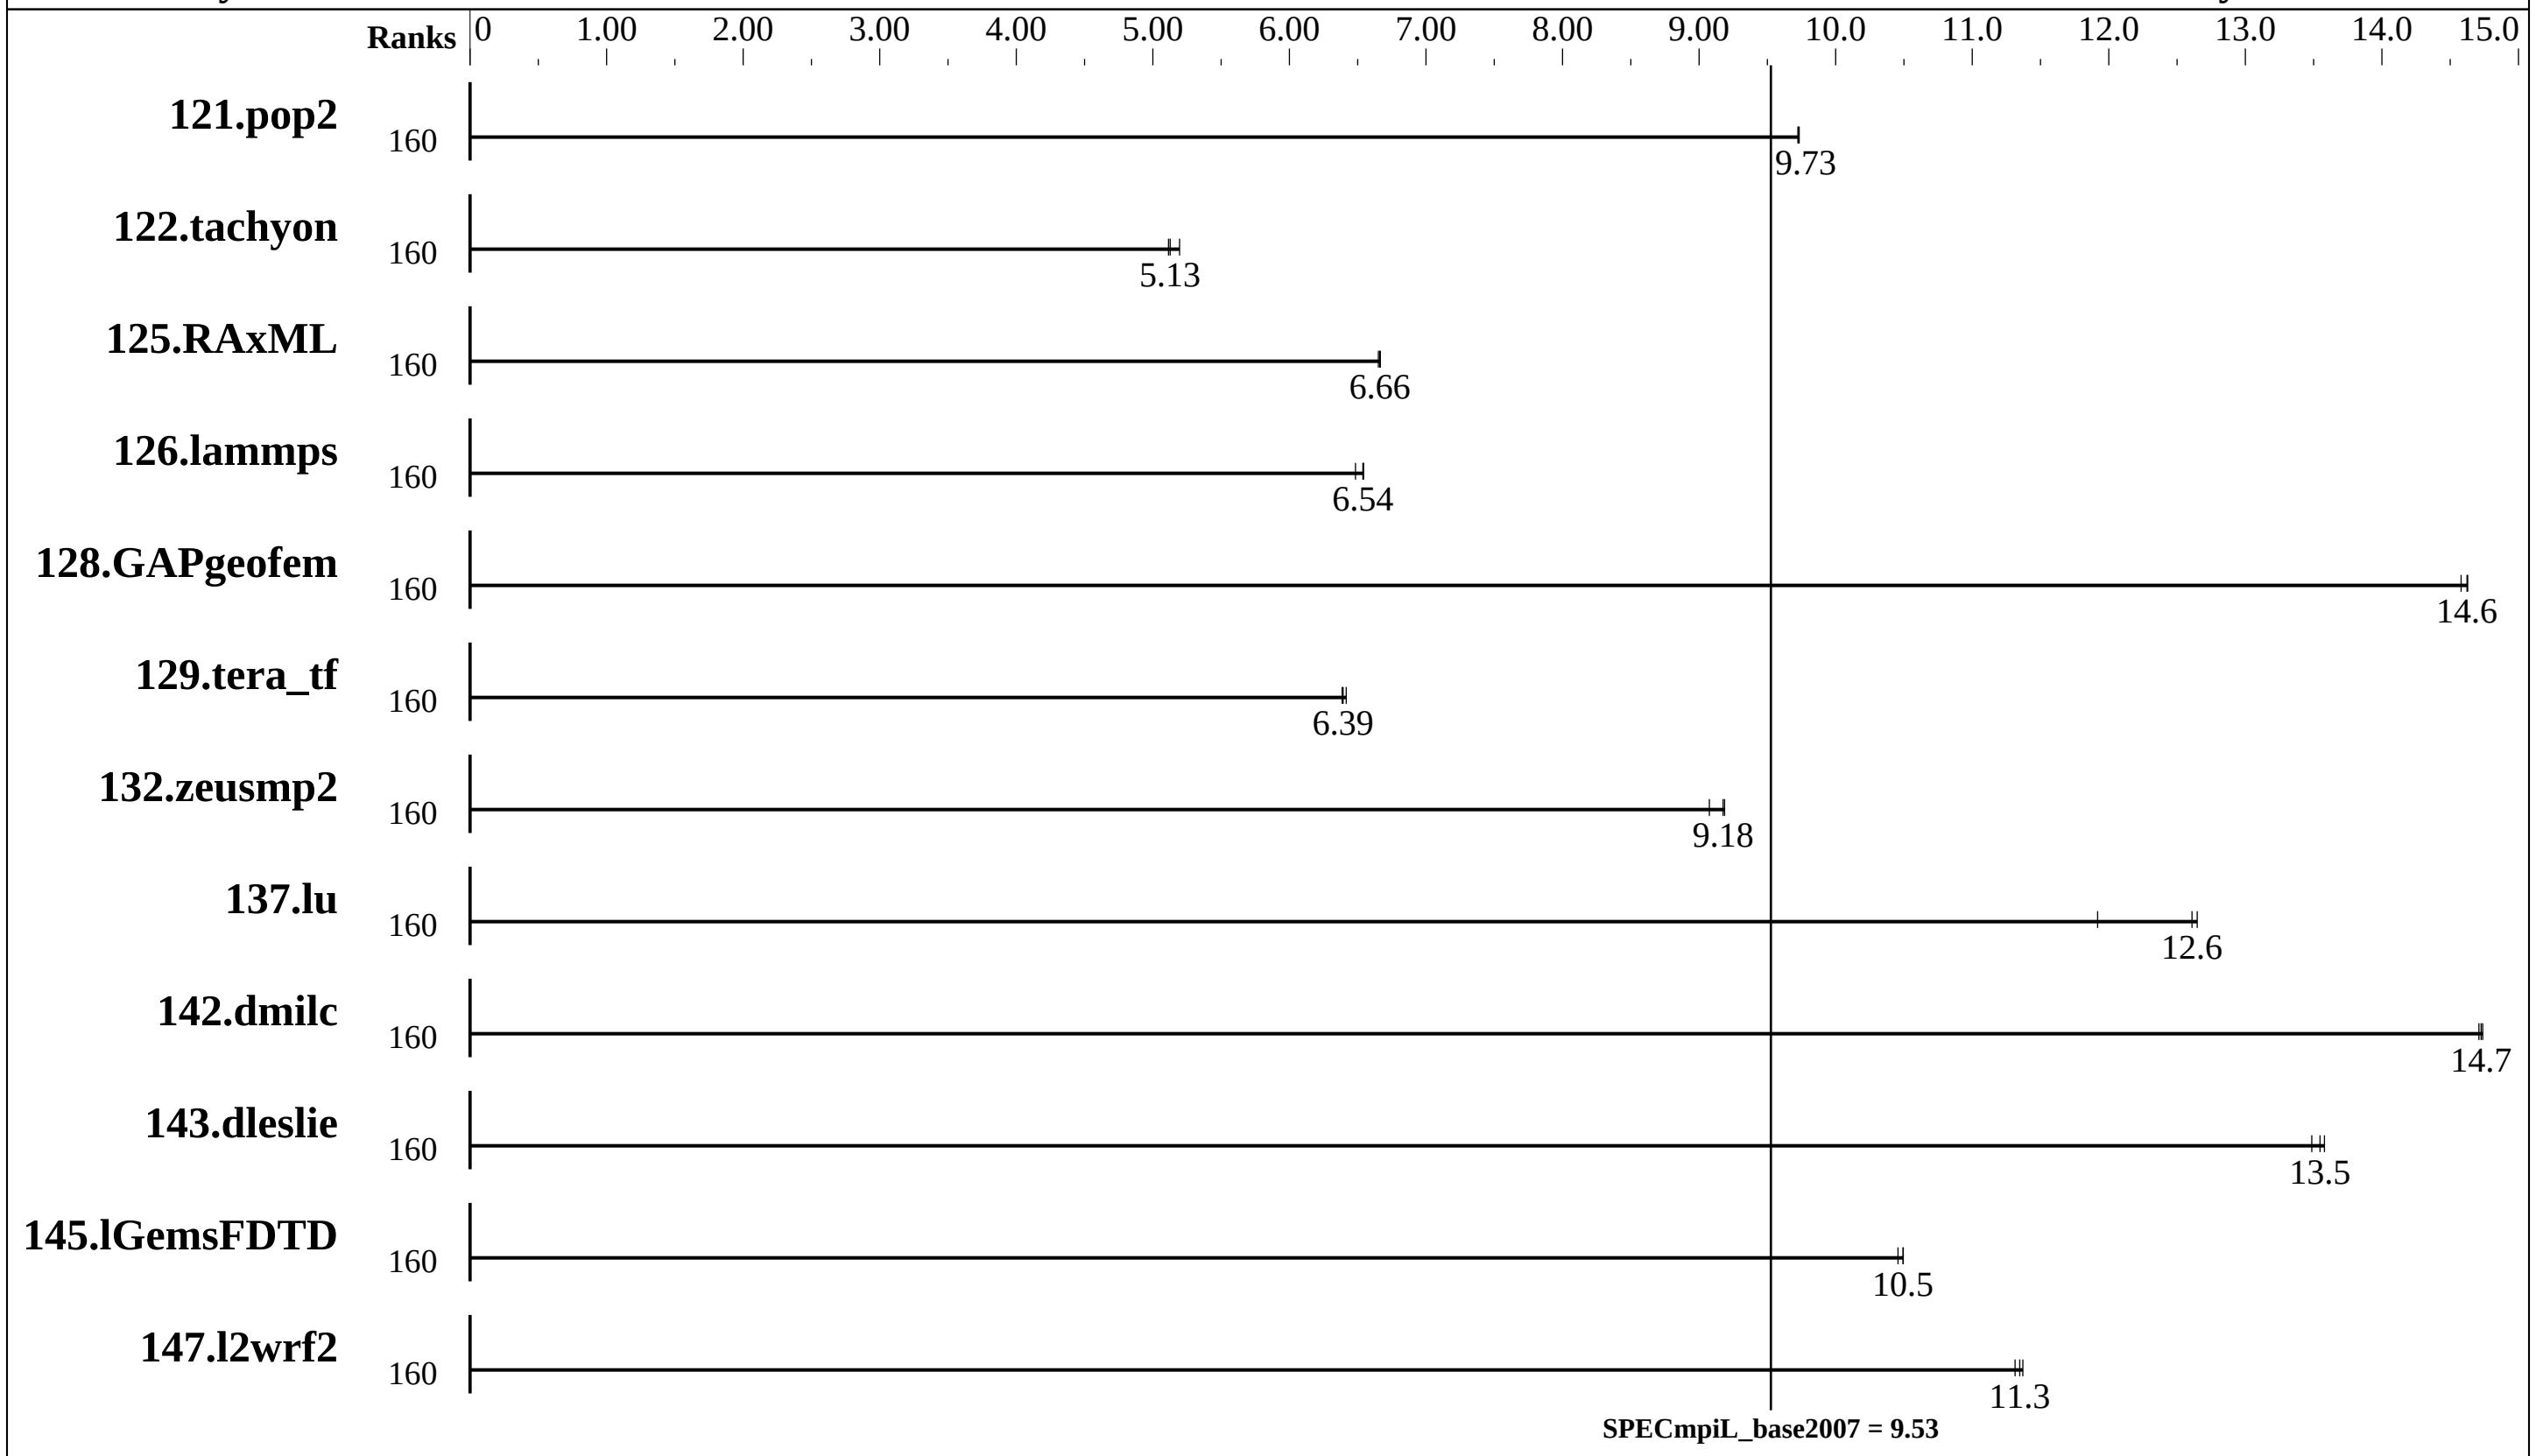

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	160	400	9.72	400	9.73	**400**	**9.73**							
122.tachyon	160	**379**	**5.13**	374	5.20	380	5.11							
125.RAxML	160	**438**	**6.66**	438	6.67	439	6.65							
126.lammps	160	**376**	**6.54**	379	6.48	376	6.54							
128.GAPgeofem	160	407	14.6	406	14.6	**406**	**14.6**							
129.tera_tf	160	171	6.42	172	6.39	**172**	**6.39**							
132.zeusmp2	160	231	9.19	234	9.08	**231**	**9.18**							
137.lu	160	**333**	**12.6**	332	12.6	353	11.9							
142.dmilc	160	250	14.7	250	14.7	**250**	**14.7**							
143.dleslie	160	**229**	**13.5**	230	13.5	228	13.6							
145.lGemsFDTD	160	422	10.5	420	10.5	**420**	**10.5**							
147.l2wrf2	160	**723**	**11.3**	725	11.3	722	11.4							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hewlett Packard Enterprise

SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 9.53

MPI2007 license:	1	**Test date:**	Oct-2017
Test sponsor:	HPE	**Hardware Availability:**	Jul-2017
Tested by:	HPE	**Software Availability:**	Nov-2017

Hardware Summary

Type of System:	Homogeneous
Compute Node:	HPE XA730i Gen10 Server Node
Interconnect:	InfiniBand (MPI and I/O)
File Server Node:	Lustre FS
Total Compute Nodes:	4
Total Chips:	8
Total Cores:	160
Total Threads:	320
Total Memory:	768 GB
Base Ranks Run:	160
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

Software Summary

C Compiler:	Intel C Composer XE for Linux, Version 18.0.0.128 Build 20170811
C++ Compiler:	Intel C++ Composer XE for Linux, Version 18.0.0.128 Build 20170811
Fortran Compiler:	Intel Fortran Composer XE for Linux, Version 18.0.0.128 Build 20170811
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
MPI Library:	HPE Performance Software - Message Passing Interface 2.17
Other MPI Info:	OFED 3.2.2
Pre-processors:	None
Other Software:	None

Node Description: HPE XA730i Gen10 Server Node

Hardware

Number of nodes:	4
Uses of the node:	compute
Vendor:	Hewlett Packard Enterprise
Model:	SGI 8600 (Intel Xeon Gold 6148, 2.40 GHz)
CPU Name:	Intel Xeon Gold 6148
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	40
Cores per chip:	20
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2400
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	27.5 MB I+D on chip per chip
Other Cache:	None
Memory:	192 GB (12 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem:	None
Other Hardware:	None
Adapter:	Mellanox MT27700 with ConnectX-4 ASIC
Number of Adapters:	2
Slot Type:	PCIe x16 Gen3 8GT/s
Data Rate:	InfiniBand 4X EDR
Ports Used:	1
Interconnect Type:	InfiniBand

Software

Adapter:	Mellanox MT27700 with ConnectX-4 ASIC
Adapter Driver:	OFED-3.4-2.1.8.0
Adapter Firmware:	12.18.1000
Operating System:	Red Hat Enterprise Linux Server 7.3 (Maipo), Kernel 3.10.0-514.2.2.el7.x86_64
Local File System:	LFS
Shared File System:	LFS
System State:	Multi-user, run level 3
Other Software:	SGI Management Center Compute Node 3.5.0, Build 716r171.rhel73-1705051353

Node Description: Lustre FS

Hardware

Number of nodes:	4
Uses of the node:	fileserver

Continued on next page

Software

Adapter:	Mellanox MT27700 with ConnectX-4 ASIC
Adapter Driver:	OFED-3.3-1.0.0.0

Continued on next page

SPEC MPIL2007 Result

Hewlett Packard Enterprise

SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 9.53

MPI2007 license:	1	**Test date:**	Oct-2017
Test sponsor:	HPE	**Hardware Availability:**	Jul-2017
Tested by:	HPE	**Software Availability:**	Nov-2017

Node Description: Lustre FS

Vendor:	Hewlett Packard Enterprise
Model:	Rackable C1104-GP2 (Intel Xeon E5-2690 v3, 2.60 GHz)
CPU Name:	Intel Xeon E5-2690 v3
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	24
Cores per chip:	12
Threads per core:	1
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz Hyper-Threading Technology disabled
CPU MHz:	2600
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	684 TB RAID 6 48 x 8+2 2TB 7200 RPM
Other Hardware:	None
Adapter:	Mellanox MT27700 with ConnectX-4 ASIC
Number of Adapters:	2
Slot Type:	PCIe x16 Gen3
Data Rate:	InfiniBand 4X EDR
Ports Used:	1
Interconnect Type:	InfiniBand

Adapter Firmware:	12.14.2036
Operating System:	Red Hat Enterprise Linux Server 7.3 (Maipo), Kernel 3.10.0-514.2.2.el7.x86_64
Local File System:	ext3
Shared File System:	LFS
System State:	Multi-user, run level 3
Other Software:	None

Interconnect Description: InfiniBand (MPI and I/O)

Hardware

Vendor:	Mellanox Technologies and SGI
Model:	SGI P0002145
Switch Model:	SGI P0002145
Number of Switches:	1
Number of Ports:	36
Data Rate:	InfiniBand 4X EDR
Firmware:	11.0350.0394
Topology:	Enhanced Hypercube
Primary Use:	MPI and I/O traffic

Software

Base Tuning Notes

```
src.alt used: 143.dleslie->integer_overflow
```

SPEC MPIL2007 Result

Hewlett Packard Enterprise
SGI 8600
(Intel Xeon Gold 6148, 2.40 GHz)

SPECmpiL_peak2007 = Not Run
SPECmpiL_base2007 = 9.53

MPI2007 license:	1	**Test date:**	Oct-2017
Test sponsor:	HPE	**Hardware Availability:**	Jul-2017
Tested by:	HPE	**Software Availability:**	Nov-2017

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
Software environment:
  export MPI_REQUEST_MAX=65536
  export MPI_TYPE_MAX=32768
  export MPI_IB_RAILS=2
  export MPI_IB_IMM_UPGRADE=false
  export MPI_IB_DCIS=2
  export MPI_IB_HYPER_LAZY=false
  export MPI_CONNECTIONS_THRESHOLD=0
  ulimit -s unlimited

BIOS settings:
  AMI BIOS version SAED7177, 07/17/2017

Job Placement:
  Each MPI job was assigned to a topologically compact set
  of nodes.

Additional notes regarding interconnect:
  The Infiniband network consists of two independent planes,
  with half the switches in the system allocated to each plane.
  I/O traffic is restricted to one plane, while MPI traffic can
  use both planes.
```

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:

 126.lammps: icpc

Fortran benchmarks:
 ifort

Benchmarks using both Fortran and C:
 icc ifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

Base Optimization Flags

C benchmarks:
`-O3 -xCORE-AVX512 -no-prec-div -ipo`

C++ benchmarks:

126.lammps: `-O3 -xCORE-AVX512 -no-prec-div -ansi-alias -ipo`

Fortran benchmarks:
`-O3 -xCORE-AVX512 -no-prec-div -ipo`

Benchmarks using both Fortran and C:
`-O3 -xCORE-AVX512 -no-prec-div -ipo`

Base Other Flags

C benchmarks:
`-lmpi`

C++ benchmarks:

126.lammps: `-lmpi`

Fortran benchmarks:
`-lmpi`

Benchmarks using both Fortran and C:
`-lmpi`

The flags file that was used to format this result can be browsed at
http://www.spec.org/mpi2007/flags/HPE_x86_64_Intel18_flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/mpi2007/flags/HPE_x86_64_Intel18_flags.xml

Tested with SPEC MPI2007 v2.0.1.
Report generated on Wed Oct 25 17:11:59 2017 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 25 October 2017.