SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Intel Server System S9248WK1HLC (Intel Xeon 9242 Platinum, 2.30 GHz, DDR4-2993 MHz, Turbo on)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 79.2

MPI2007 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

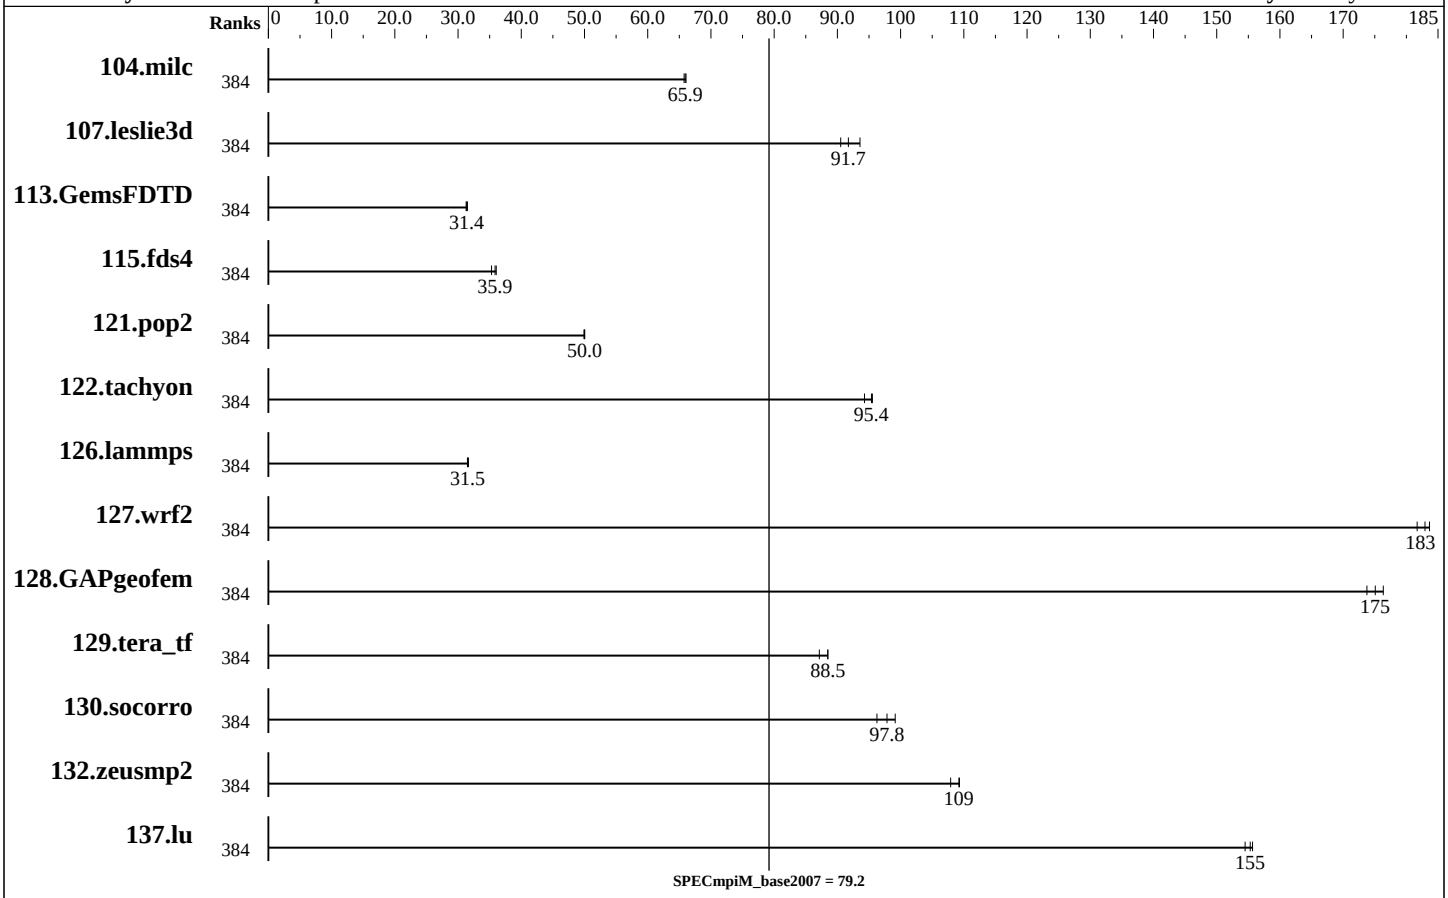

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	384	23.8	65.8	23.7	66.1	**23.7**	**65.9**							
107.leslie3d	384	55.8	93.6	57.7	90.5	**56.9**	**91.7**							
113.GemsFDTD	384	202	31.3	**201**	**31.4**	200	31.5							
115.fds4	384	**54.4**	**35.9**	54.1	36.0	55.3	35.3							
121.pop2	384	**82.5**	**50.0**	82.7	49.9	82.5	50.0							
122.tachyon	384	29.7	94.3	**29.3**	**95.4**	29.3	95.5							
126.lammps	384	92.1	31.6	92.6	31.5	**92.4**	**31.5**							
127.wrf2	384	**42.6**	**183**	42.9	182	42.4	184							
128.GAPgeofem	384	**11.8**	**175**	11.7	176	11.9	174							
129.tera_tf	384	31.3	88.5	**31.3**	**88.5**	31.8	87.1							

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Intel Server System S9248WK1HLC (Intel Xeon 9242 Platinum, 2.30 GHz, DDR4-2993 MHz, Turbo on)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 79.2

MPI2007 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	384	39.7	96.3	38.5	99.1	**39.0**	**97.8**							
132.zeusmp2	384	28.4	109	28.8	108	**28.4**	**109**							
137.lu	384	**23.7**	**155**	23.6	156	23.8	154							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System:	Homogeneous
Compute Node:	Intel Server System S9248WK1HLC
Interconnect:	Intel Omni-Path 100 series
File Server Node:	Lustre FS 2.10.4
Total Compute Nodes:	4
Total Chips:	8
Total Cores:	384
Total Threads:	768
Total Memory:	1536 GB
Base Ranks Run:	384
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

Software Summary

C Compiler:	Intel C++ Composer XE 2019 Update 3 for Linux Version 19.0.3.199 20190206
C++ Compiler:	Intel C++ Composer XE 2019 Update 3 for Linux Version 19.0.3.199 20190206
Fortran Compiler:	Intel Fortran Composer 2019 Update 3 for Linux Version 19.0.3.199 20190206
Base Pointers:	64-bit
Peak Pointers:	64-bit
MPI Library:	Intel MPI Library 2018 Update 4 Build 20180823
Other MPI Info:	libfabric-1.7.0
Pre-processors:	No
Other Software:	None

Node Description: Intel Server System S9248WK1HLC

Hardware

Number of nodes:	4
Uses of the node:	Compute
Vendor:	Intel
Model:	Intel Server System S9248WK1HLC (2 x Intel Xeon 9242 Platinum, Turbo ON)
CPU Name:	Intel Xeon Platinum 9242
CPU(s) orderable:	1,2 chips
Chips enabled:	2
Cores enabled:	96
Cores per chip:	48
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.8 GHz
CPU MHz:	2200
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	71.5 MB I+D on chip per chip, 35.75 MB shared / 24 cores
Other Cache:	None
Memory:	384 GB (24 x 16 GB 2Rx8 DDR4-2993Y-R)
Disk Subsystem:	N/A
Other Hardware:	None
Adapter:	Intel Omni-Path Edge Switch 100 series
Number of Adapters:	2

Continued on next page

Software

Adapter:	Intel Omni-Path Edge Switch 100 series
Adapter Driver:	IFS 10.9.0.0.210
Adapter Firmware:	1.27.0
Operating System:	Oracle Linux Server release 7.6
Local File System:	Linux/xfs
Shared File System:	Lustre FS 2.10.4
System State:	Multi-User
Other Software:	IBM Platform LSF Standard 9.1.1.1

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Intel Server System S9248WK1HLC (Intel Xeon 9242 Platinum, 2.30 GHz, DDR4-2993 MHz, Turbo on)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 79.2

MPI2007 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Node Description: Intel Server System S9248WK1HLC

Slot Type:	PCI-Express x16
Data Rate:	2 x 12.5 GB/s
Ports Used:	1
Interconnect Type:	Intel Omni-Path Fabric 100 series

Node Description: Lustre FS 2.10.4

Hardware

Number of nodes:	11
Uses of the node:	Fileserver
Vendor:	Intel
Model:	Intel Server System R2208GZ4GC4
CPU Name:	Intel Xeon E5-2680
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	16
Cores per chip:	8
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.5 GHz
CPU MHz:	2700
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	2 MB I+D on chip per chip
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB per node (8*8GB 1600MHz Reg ECC DDR3)
Disk Subsystem:	136 TB 3 RAID with 8 SAS/SATA
Other Hardware:	None
Adapter:	Intel Omni-Path Fabric Adapter 100 series
Number of Adapters:	1
Slot Type:	PCI-Express x16
Data Rate:	12.5 GB/s
Ports Used:	1
Interconnect Type:	Intel Omni-Path Fabric 100 series

Software

Adapter:	Intel Omni-Path Fabric Adapter 100 series
Adapter Driver:	IFS 10.9.0.0.210
Adapter Firmware:	1.27.0
Operating System:	Redhat Enterprise Linux Server Release 7.6
Local File System:	None
Shared File System:	Lustre FS 2.10.4 2.10.4
System State:	Multi-User
Other Software:	None

Interconnect Description: Intel Omni-Path 100 series

Hardware

Vendor:	Intel
Model:	Intel Omni-Path Fabric 100 series
Switch Model:	Intel Omni-Path Edge Switch 100 series
Number of Switches:	8
Number of Ports:	48
Data Rate:	2 x 12.5 GB/s
Firmware:	1.27.0
Topology:	Fat tree

Software

Continued on next page

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Intel Server System S9248WK1HLC (Intel Xeon 9242 Platinum, 2.30 GHz, DDR4-2993 MHz, Turbo on)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 79.2

MPI2007 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Interconnect Description: Intel Omni-Path 100 series

Primary Use:	MPI and I/O traffic

Submit Notes

```
The config file option 'submit' was used.
```

Platform Notes

```
The system used pre-release CPUs running at 2200 MHz instead of the nominal base frequency (2300 MHz).
```

General Notes

```
130.socorro (base): "nullify_ptrs" src.alt was used.
129.tera_tf (base): "add_rank_support" src.alt was used.
143.dleslie (base): "integer_overflow" src.alt was used.

MPI startup command:
   mpiexec.hydra command was used to start MPI jobs.
   export I_MPI_FABRICS=shm:ofi
   export I_MPI_PIN_DOMAIN=core
   export I_MPI_PIN_ORDER=bunch
   export I_MPI_COMPATIBILITY=3
 HFI driver parameters:
   rcvhdrcnt = 4096
Spectre and Meltdown:
   Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
   is mitigated in the system as tested and documented.
   Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
   is mitigated in the system as tested and documented.
   Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
   is mitigated in the system as tested and documented.

Kernel & Microcode:
   Kernel: 3.10.0-957.12.2.el7.crt1.x86_64
   Microcode: 0x4000024
BIOS settings:
   Version: SE5C620.86B.0D.01.0505.050820190224
   Intel Hyper-Threading Technology (SMT) = Enabled (default is Enabled)
   Intel Turbo Boost Technology (Turbo)   = Enabled (default is Enabled)
 Job placement:
   Each MPI job was assigned to a topologically compact set of nodes.
 IBM Platform LSF was used for job submission. It has no impact on performance.
   Information can be found at: http://www.ibm.com
```

Base Compiler Invocation

C benchmarks:
`mpiicc`

C++ benchmarks:

126.lammps: `mpiicpc`

Fortran benchmarks:
`mpiifort`

Benchmarks using both Fortran and C:
`mpiicc mpiifort`

Base Portability Flags

121.pop2: `-DSPEC_MPI_CASE_FLAG`
126.lammps: `-DMPICH_IGNORE_CXX_SEEK`
127.wrf2: `-DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX`
130.socorro: `-assume nostd_intent_in`

Base Optimization Flags

C benchmarks:
`-O3 -xCORE-AVX512 -no-prec-div -ipo`

C++ benchmarks:

126.lammps: `-O3 -xCORE-AVX512 -no-prec-div -ipo`

Fortran benchmarks:
`-O3 -xCORE-AVX512 -no-prec-div -ipo`

Benchmarks using both Fortran and C:
`-O3 -xCORE-AVX512 -no-prec-div -ipo`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20190110.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20190110.xml`

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.
Report generated on Wed Jul 31 16:22:05 2019 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 3 July 2019.