SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM_peak2007 = 66.6

SPECmpiM_base2007 = 66.6

MPI2007 license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Oct-2020
Hardware Availability: Oct-2020
Software Availability: Oct-2020

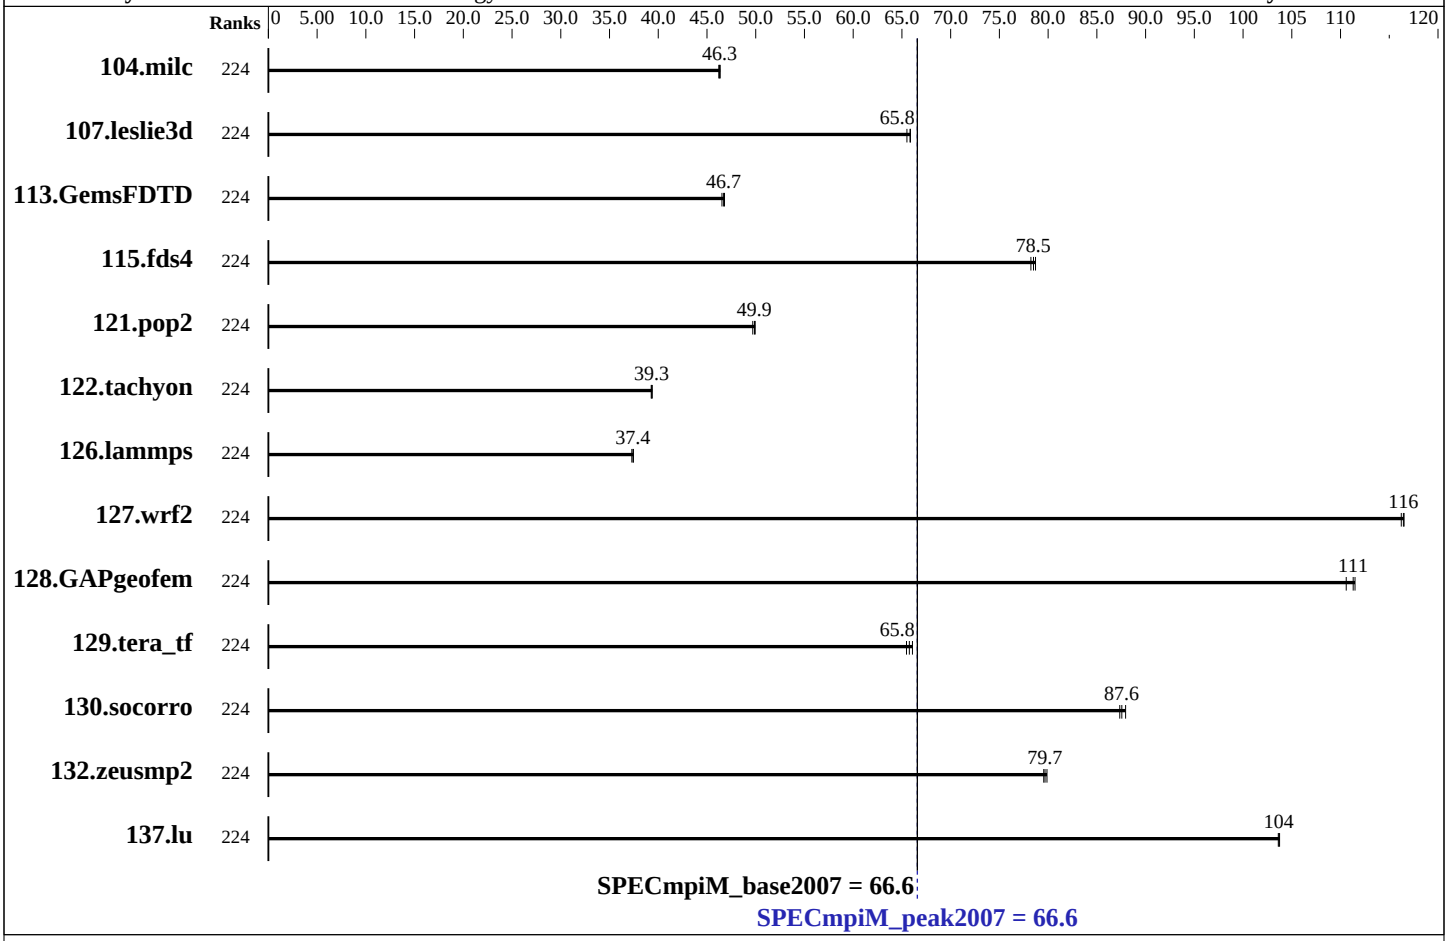

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	224	33.9	46.2	33.8	46.4	**33.8**	**46.3**	224	33.9	46.2	33.8	46.4	**33.8**	**46.3**
107.leslie3d	224	79.7	65.5	79.2	65.9	**79.3**	**65.8**	224	79.7	65.5	79.2	65.9	**79.3**	**65.8**
113.GemsFDTD	224	136	46.5	135	46.8	**135**	**46.7**	224	136	46.5	135	46.8	**135**	**46.7**
115.fds4	224	24.9	78.2	24.8	78.7	**24.9**	**78.5**	224	24.9	78.2	24.8	78.7	**24.9**	**78.5**
121.pop2	224	82.7	49.9	83.1	49.7	**82.8**	**49.9**	224	82.7	49.9	83.1	49.7	**82.8**	**49.9**
122.tachyon	224	**71.1**	**39.3**	71.0	39.4	71.2	39.3	224	**71.1**	**39.3**	71.0	39.4	71.2	39.3
126.lammps	224	77.8	37.5	**77.9**	**37.4**	78.2	37.3	224	77.8	37.5	**77.9**	**37.4**	78.2	37.3
127.wrf2	224	**66.9**	**116**	66.9	117	67.1	116	224	**66.9**	**116**	66.9	117	67.1	116
128.GAPgeofem	224	18.5	111	18.7	111	**18.6**	**111**	224	18.5	111	18.7	111	**18.6**	**111**
129.tera_tf	224	42.3	65.5	**42.1**	**65.8**	41.9	66.1	224	42.3	65.5	**42.1**	**65.8**	41.9	66.1

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM_peak2007 = 66.6

SPECmpiM_base2007 = 66.6

MPI2007 license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Oct-2020
Hardware Availability: Oct-2020
Software Availability: Oct-2020

Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	224	43.7	87.4	43.4	87.9	**43.6**	**87.6**	224	43.7	87.4	43.4	87.9	**43.6**	**87.6**
132.zeusmp2	224	39.0	79.6	38.8	79.9	**38.9**	**79.7**	224	39.0	79.6	38.8	79.9	**38.9**	**79.7**
137.lu	224	**35.5**	**104**	35.5	104	35.4	104	224	**35.5**	**104**	35.5	104	35.4	104

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System:	Homogeneous
Compute Node:	ThinkSystem SR860 V2
Interconnect:	Nvidia Mellanox ConnectX-6 HDR Infiniband
File Server Node:	NFS
Total Compute Nodes:	2
Total Chips:	8
Total Cores:	224
Total Threads:	224
Total Memory:	3 TB
Base Ranks Run:	224
Minimum Peak Ranks:	224
Maximum Peak Ranks:	224

Software Summary

C Compiler:	Intel Parallel Studio C Compiler 20 Update 2 for Linux Version 19.1.2.254 Build 20200623
C++ Compiler:	Intel Parallel Studio C++ Compiler 20 Update 2 for Linux Version 19.1.2.254 Build 20200623
Fortran Compiler:	Intel Parallel Studio Fortran Compiler 20 Update 2 for Linux Version 19.1.2.254 Build 20200623
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
MPI Library:	Intel Parallel Studio MPI Library for Linux* OS Version 2020 Update 2 Build 20200624
Other MPI Info:	None
Pre-processors:	No
Other Software:	None

Node Description: ThinkSystem SR860 V2

Hardware

Number of nodes:	2
Uses of the node:	compute
Vendor:	Lenovo Global Technology
Model:	ThinkSystem SR860 V2
CPU Name:	Intel Xeon Platinum 8380H
CPU(s) orderable:	2,4 chips
Chips enabled:	4
Cores enabled:	112
Cores per chip:	28
Threads per core:	1
CPU Characteristics:	Intel Turbo Boost Technology up to 4.3 GHz
CPU MHz:	2900
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	39424 KB I+D on chip per chip
Other Cache:	None
Memory:	1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)
Disk Subsystem:	1 x 1 TB SATA 2.5" SSD
Other Hardware:	N/A
Adapter:	Nvidia Mellanox ConnectX-6 HDR Infiniband
Number of Adapters:	1

Continued on next page

Software

Adapter:	Nvidia Mellanox ConnectX-6 HDR Infiniband
Adapter Driver:	5.1-0.6.6
Adapter Firmware:	20.25.2006
Operating System:	SUSE Linux Enterprise Server 15 SP2 5.3.18-22-default
Local File System:	xfs
Shared File System:	None
System State:	Multi-user, run level 3
Other Software:	None

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM_peak2007 = 66.6

SPECmpiM_base2007 = 66.6

MPI2007 license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Oct-2020
Hardware Availability: Oct-2020
Software Availability: Oct-2020

Node Description: ThinkSystem SR860 V2

Slot Type:	PCI-Express 3.0 x16
Data Rate:	200 Gb/s
Ports Used:	1
Interconnect Type:	Nvidia Mellanox ConnectX-6 HDR Infiniband

Node Description: NFS

Hardware

Number of nodes:	1
Uses of the node:	Fileserver
Vendor:	Lenovo Global Technology
Model:	ThinkSystem SR860 V2
CPU Name:	Intel Xeon Platinum 8380H
CPU(s) orderable:	2,4 chips
Chips enabled:	4
Cores enabled:	112
Cores per chip:	28
Threads per core:	1
CPU Characteristics:	Intel Turbo Boost Technology up to 4.3 GHz
CPU MHz:	2900
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	39424 KB I+D on chip per chip
Other Cache:	None
Memory:	1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)
Disk Subsystem:	1 x 1 TB SATA 2.5" SSD
Other Hardware:	None
Adapter:	Nvidia Mellanox ConnectX-6 HDR Infiniband
Number of Adapters:	1
Slot Type:	PCI-Express 3.0 x16
Data Rate:	200 Gb/s
Ports Used:	1
Interconnect Type:	Nvidia Mellanox ConnectX-6 HDR Infiniband

Software

Adapter:	Nvidia Mellanox ConnectX-6 HDR Infiniband
Adapter Driver:	5.1-0.6.6
Adapter Firmware:	20.25.2006
Operating System:	SUSE Linux Enterprise Server 15 SP2
Local File System:	None
Shared File System:	NFS
System State:	Multi-User, run level 3
Other Software:	None

Interconnect Description: Nvidia Mellanox ConnectX-6 HDR Infiniband

Hardware

Vendor:	Nvidia
Model:	Nvidia Mellanox ConnectX-6 HDR Infiniband
Switch Model:	Nvidia Mellanox QM8700
Number of Switches:	1
Number of Ports:	40
Data Rate:	200 Gb/s
Firmware:	3.9.0606
Topology:	Mesh

Software

Continued on next page

Interconnect Description: Nvidia Mellanox ConnectX-6 HDR Infiniband

Primary Use: MPI and I/O traffic	

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
MPI startup command:
  mpiexec command was used to start MPI jobs.

RAM configuration:
  Compute nodes have 2 x 32 GB RDIMM on each memory channel.

BIOS settings:
  Operating Mode : Maximum Performance Mode
  Intel Hyper-Threading Technology (SMT): Disabled
  SNC (Sub-NUMA Cluster): Enable


Yes: The test sponsor attests, as of date of publication,
that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication,
that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication,
that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
```

Base Compiler Invocation

C benchmarks:
`mpiicc`

C++ benchmarks:

126.lammps: `mpiicpc`

Fortran benchmarks:
`mpiifort`

Benchmarks using both Fortran and C:
`mpiicc mpiifort`

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG
126.lammps: -DMPICH_IGNORE_CXX_SEEK
127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX
130.socorro: -assume nostd_intent_in

Base Optimization Flags

C benchmarks:
-O3 -ipo -xCORE-AVX512 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -ipo -xCORE-AVX512 -no-prec-div

Fortran benchmarks:
-O3 -ipo -xCORE-AVX512 -no-prec-div

Benchmarks using both Fortran and C:
-O3 -ipo -xCORE-AVX512 -no-prec-div

Peak Optimization Flags

C benchmarks:

104.milc: basepeak = yes

122.tachyon: basepeak = yes

C++ benchmarks:

126.lammps: basepeak = yes

Fortran benchmarks:

107.leslie3d: basepeak = yes

113.GemsFDTD: basepeak = yes

129.tera_tf: basepeak = yes

137.lu: basepeak = yes

Benchmarks using both Fortran and C:

115.fds4: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

121.pop2: basepeak = yes

127.wrf2: basepeak = yes

128.GAPgeofem: basepeak = yes

130.socorro: basepeak = yes

132.zeusmp2: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20201007.html
http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20201007.xml
http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.
Report generated on Wed Nov 4 16:32:00 2020 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 4 November 2020.