SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

xFusion FusionServer 2288H V7

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 45.3

MPI2007 license: 6488
Test sponsor: xFusion
Tested by: xFusion

Test date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: Jul-2022

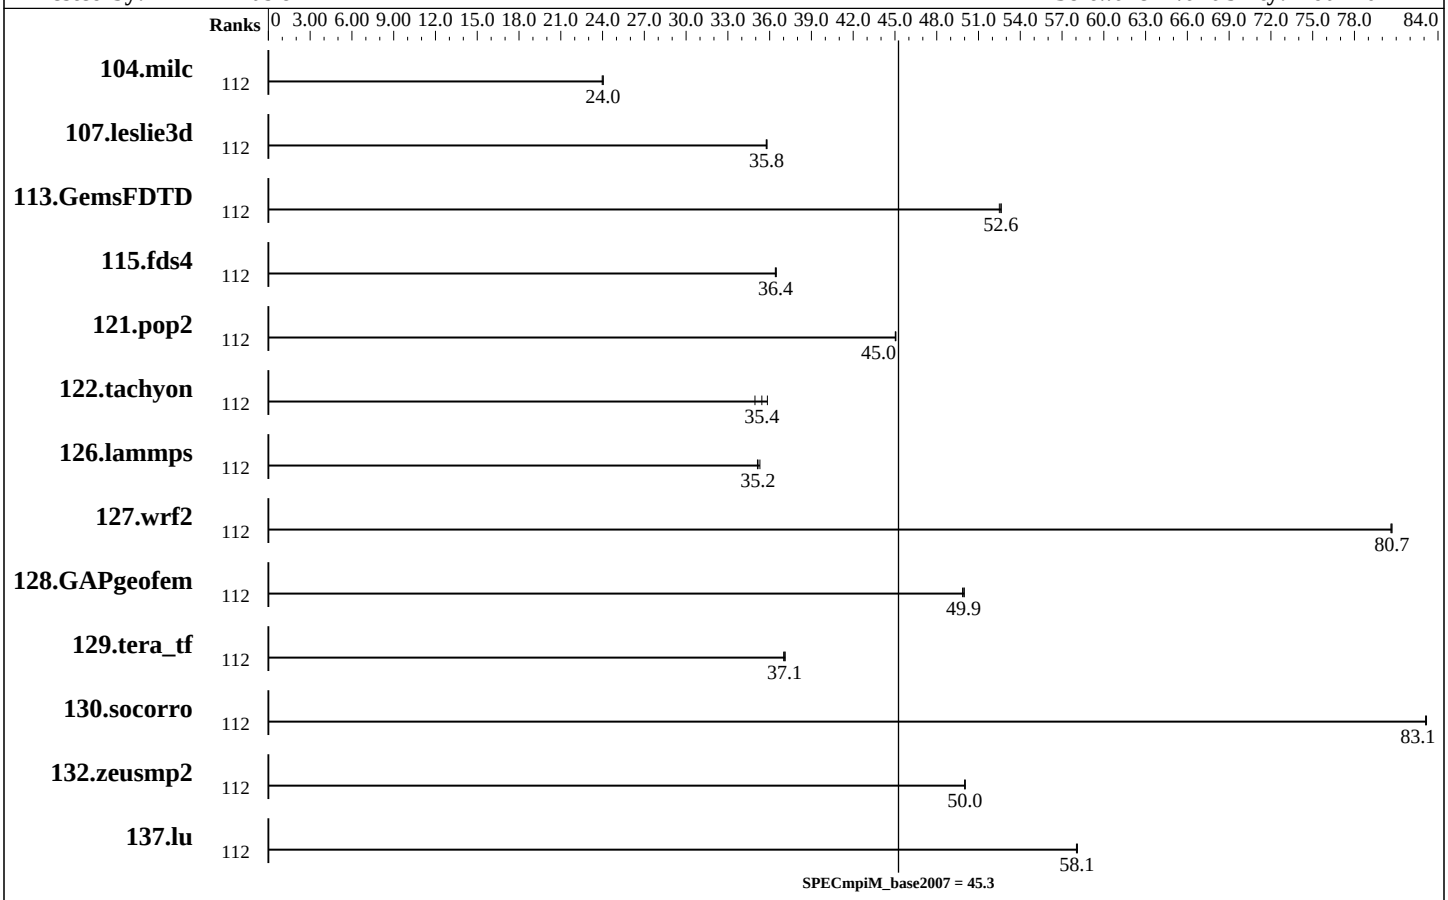

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	112	65.3	24.0	65.1	24.0	**65.1**	**24.0**							
107.leslie3d	112	146	35.8	146	35.8	**146**	**35.8**							
113.GemsFDTD	112	120	52.5	**120**	**52.6**	120	52.6							
115.fds4	112	53.6	36.4	53.5	36.5	**53.5**	**36.4**							
121.pop2	112	91.6	45.1	**91.7**	**45.0**	91.7	45.0							
122.tachyon	112	78.0	35.8	**78.9**	**35.4**	80.0	34.9							
126.lammps	112	83.0	35.1	82.6	35.3	**82.9**	**35.2**							
127.wrf2	112	96.7	80.6	96.6	80.7	**96.6**	**80.7**							
128.GAPgeofem	112	41.3	50.0	**41.3**	**49.9**	41.4	49.9							
129.tera_tf	112	**74.7**	**37.1**	74.6	37.1	74.8	37.0							

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

xFusion FusionServer 2288H V7

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 45.3

MPI2007 license: 6488
Test sponsor: xFusion
Tested by: xFusion

Test date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: Jul-2022

Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	112	45.9	83.2	45.9	83.1	**45.9**	**83.1**							
132.zeusmp2	112	62.0	50.0	62.0	50.0	**62.0**	**50.0**							
137.lu	112	**63.3**	**58.1**	63.3	58.0	63.3	58.1							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System:	Heterogenous
Compute Node:	FusionServer 2288H V7 Node
File Server Node:	FusionServer 2288H V7 Node
Head Node:	FusionServer 2288H V7 Node
Total Compute Nodes:	1
Total Chips:	2
Total Cores:	112
Total Threads:	112
Total Memory:	512 GB
Base Ranks Run:	112
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

Software Summary

C Compiler:	C/C++: Version 2022.2.1 of Intel oneAPI DPC++/C++ Compiler for Linux Build 20221020;
C++ Compiler:	C/C++: Version 2022.2.1 of Intel oneAPI DPC++/C++ Compiler for Linux Build 20221020;
Fortran Compiler:	Fortran: Version 2021.7.1 of Intel Fortran Compiler for Linux Build 20221019;
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
MPI Library:	Intel MPI Library for Linux OS, Version 2021.7 Build 20221022
Other MPI Info:	None
Pre-processors:	No
Other Software:	jemalloc memory allocator V5.2.1

Node Description: FusionServer 2288H V7 Node

Hardware

Number of nodes:	1
Uses of the node:	head, compute, fileserver
Vendor:	xFusion
Model:	FusionServer 2288H V7
CPU Name:	Intel Xeon Platinum 8480+
CPU(s) orderable:	1, 2 chips
Chips enabled:	2
Cores enabled:	112
Cores per chip:	56
Threads per core:	1
CPU Characteristics:	Enable LP [Global] disabled
CPU MHz:	1900
Primary Cache:	32 KB I + 48 KB D on chip per core
Secondary Cache:	2 MB I+D on chip per core
L3 Cache:	105 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Disk Subsystem:	1 x 1920 GB SATA SSD
Other Hardware:	None
Adapter:	None
Number of Adapters:	0
Slot Type:	None
Data Rate:	None

Continued on next page

Software

Adapter:	None
Adapter Driver:	None
Adapter Firmware:	None
Operating System:	Red Hat Enterprise Linux release 9.0 (Plow) 5.14.0-70.13.1.el9_0.x86_64
Local File System:	xfs
Shared File System:	None
System State:	Multi-User
Other Software:	jemalloc memory allocator V5.2.1

Node Description: FusionServer 2288H V7 Node

Ports Used: 0
Interconnect Type: None

Submit Notes

```
The config file option 'submit' was used.
```

Base Compiler Invocation

C benchmarks:
`mpiicc`

C++ benchmarks:

126.lammps: `mpiicpc`

Fortran benchmarks:
`mpiifort`

Benchmarks using both Fortran and C:
`mpiicc mpiifort`

Base Portability Flags

121.pop2: `-DSPEC_MPI_CASE_FLAG`
126.lammps: `-DMPICH_IGNORE_CXX_SEEK`
127.wrf2: `-DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX`

Base Optimization Flags

C benchmarks:
`-O3 -xCORE-AVX512 -no-prec-div -L/usr/local/lib`
`-Wl,--rpath=/usr/local/lib -ljemalloc`

C++ benchmarks:

126.lammps: `-O3 -xCORE-AVX512 -no-prec-div -L/usr/local/lib`
`-Wl,--rpath=/usr/local/lib -ljemalloc`

Fortran benchmarks:
`-O3 -xCORE-AVX512 -no-prec-div -L/usr/local/lib`
`-Wl,--rpath=/usr/local/lib -ljemalloc`

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-O3 -xCORE-AVX512 -no-prec-div -L/usr/local/lib
-Wl,--rpath=/usr/local/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/mpi2007/flags/xFusion_x86_64_Intel_linux.html
http://www.spec.org/mpi2007/flags/xfusion-specmpi-platform-flag.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/mpi2007/flags/xFusion_x86_64_Intel_linux.xml
http://www.spec.org/mpi2007/flags/xfusion-specmpi-platform-flag.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.
Report generated on Wed Jan 11 14:04:47 2023 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 11 January 2023.