OMPM2001 Result

Copyright ©1999-2002, Standard Performance Evaluation Corporation

IBM Corporation

IBM eServer OpenPower 710 (1650 MHz, 2CPU, Linux)

SPECompMpeak2001 = 5282

SPECompMbase2001 = 4930

SPEC license #: HPG0005 | Tested by: IBM | Test site: Austin, TX | Test date: Jan-2005 | Hardware Avail: Feb-2005 | Software Avail: Oct-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Peak Runtime	Peak Ratio
310.wupwise_m	6000	916	6549	921	6516
312.swim_m	6000	1536	3906	1537	3905
314.mgrid_m	7300	2786	2621	2023	3609
316.applu_m	4000	809	4942	797	5020
318.galgel_m	5100	425	12002	343	14855
320.equake_m	2600	603	4310	497	5227
324.apsi_m	3400	673	5052	676	5029
326.gafort_m	8700	1771	4914	1778	4894
328.fma3d_m	4600	1539	2989	1583	2907
330.art_m	6400	550	11641	555	11541
332.ammp_m	7000	2480	2822	2318	3019

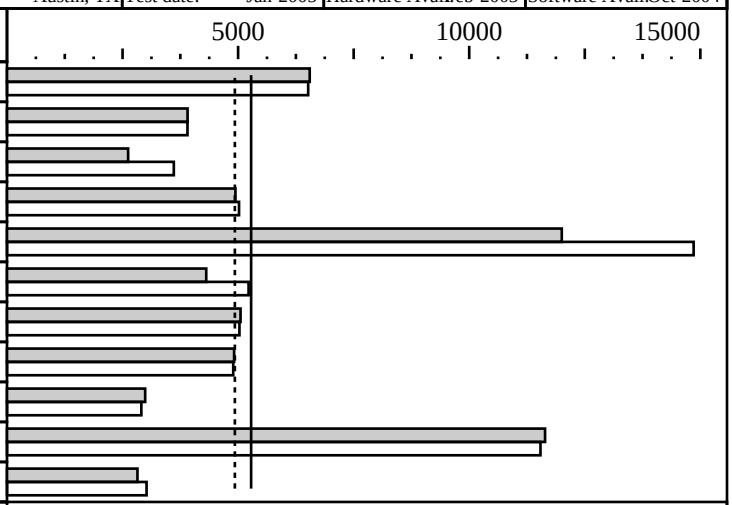

Hardware

CPU:	POWER5
CPU MHz:	1650
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (SMT on)
CPU(s) orderable:	1, 2
Primary Cache:	64KBI+32KBD (on chip)/core
Secondary Cache:	1920KB unified (on chip)/chip
L3 Cache:	36MB unified (off-chip)/DCM, 1DCM/SUT
Other Cache:	none
Memory:	8x4 GB
Disk Subsystem:	1x73GB SCSI, 15K RPM
Other Hardware:	none

Software

OpenMP Threads:	4
Parallel:	OpenMP
Operating System:	SUSE LINUX Enterprise Server 9 for IBM POWER
Compiler:	XL Fortran Enterprise Edition Version 9.1 for Linux XL C/C++ Enterprise Edition Version 7.0 for Linux Other Software: IBM ESSL for Linux on Power, Version 4 release 2
File System:	ext2
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM Corporation
 Portability Flags & Environment Variables

   -qfixed used in: 310.wupwise_m, 312.swim_m, 314.mgrid_m, 316.applu_m, 324.apsi_m
   -qfixed=80 used in: 318.galgel_m
   -qsuffix=f=f90 used in: 318.galgel_m, 326.gafort_m, 328.fma3d_m
   export XLFRTEOPTS=NAMELIST=OLD used in: 326.gafort_m

 Base Flags
   C:      -O5 -q64 -qipa=partition=large -qmaxmem=-1 -qsmp=omp
   FORTRAN:-O5 -q32 -qipa=partition=large -qmaxmem=-1 -qsmp=omp

 Base & Peak User Environment:
   OMP_NUM_THREADS=4
   OMP_DYNAMIC=FALSE
   XLSMPOPTS=SPINS=0:YIELDS=0:STACK=8000000:SCHEDULE=STATIC
   MALLOCMULTIHEAP=1
   Stack size set to unlimited using the command "ulimit -s unlimited".
 Peak Flags
   -qsmp=omp used in all cases
   310.wupwise_m: -O5 -q64 -qipa=partition=large -qmaxmem=-1
   312.swim_m:    -O5 -q32 -qhot -qarch=pwr5 -qtune=pwr5
   314.mgrid_m:   -O5 -q64 -qipa=partition=large -qmaxmem=-1
```

Copyright ©1999-2002, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
        "Fortran compiler invoked as /opt/ibmcmp/xlf/9.1/bin/xlf_r"
  316.applu_m:   -O5 -q32 -qarch=pwr5 -qtune=pwr5
  318.galgel_m:  -O5 -q64 -qipa=partition=large -qmaxmem=-1 -qessl -lesslsmp
  320.equake_m:  -O5 -q32 -qarch=pwr5 -qtune=pwr5 -qhot=arraypad -Q
  324.apsi_m:    -O4 -q32 -qarch=pwr5 -qtune=pwr5
                 -qipa=partition=large -qmaxmem=-1
  326.gafort_m:  -O5 -q32 -qhot=arraypad
                 -qipa=partition=large -qmaxmem=-1
  328.fma3d_m:   -O5 -q64 -qalign=natural -qhot=arraypad -qipa=noobject
                 -qipa=partition=large -qmaxmem=-1
  330.art_m:     -O4 -q64 -qhot
  332.ammp_m:    -O5 -q32 -qhot=arraypad -Q

Alternate sources:
  Approved src.alt available as ompm-purdue1-20040324.tar.gz
  Used for 330.art_m, base and peak.

Peak sources:
  SPEC OMPL2001 source for 32bit systems modified for SPEC OMPM2001 used
  with 312.swim_m, 316.applu_m, 320.equake_m, 326.gafort_m
  Available as ompl.32 src.alt in SPEC OMP v3.0.

SMT: Acronym for "Simultaneous Multi-Threading". A processor technology that allows
     the simultaneous execution of multiple thread contexts within a single processor
     core. (Enabled by default)
DCM: Acronym for "Dual-Chip Module" (one dual-core processor chip + one L3-cache chip)
SUT: Acronym for "System Under Test"
ESSL: Engineering and Scientific Subroutine Library

C: IBM XL C for Linux invoked as xlc_r
Fortran 90 and 77: IBM XL Fortran for Linux invoked as xlf90_r, except as noted.
Flag file: IBM-20050209-Linux.txt
```