SPEC® OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR950

SPECompG_peak2012 = Not Run

SPECompG_base2012 = 40.6

OMP2012 license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2018
Hardware Availability: Aug-2017
Software Availability: Aug-2018

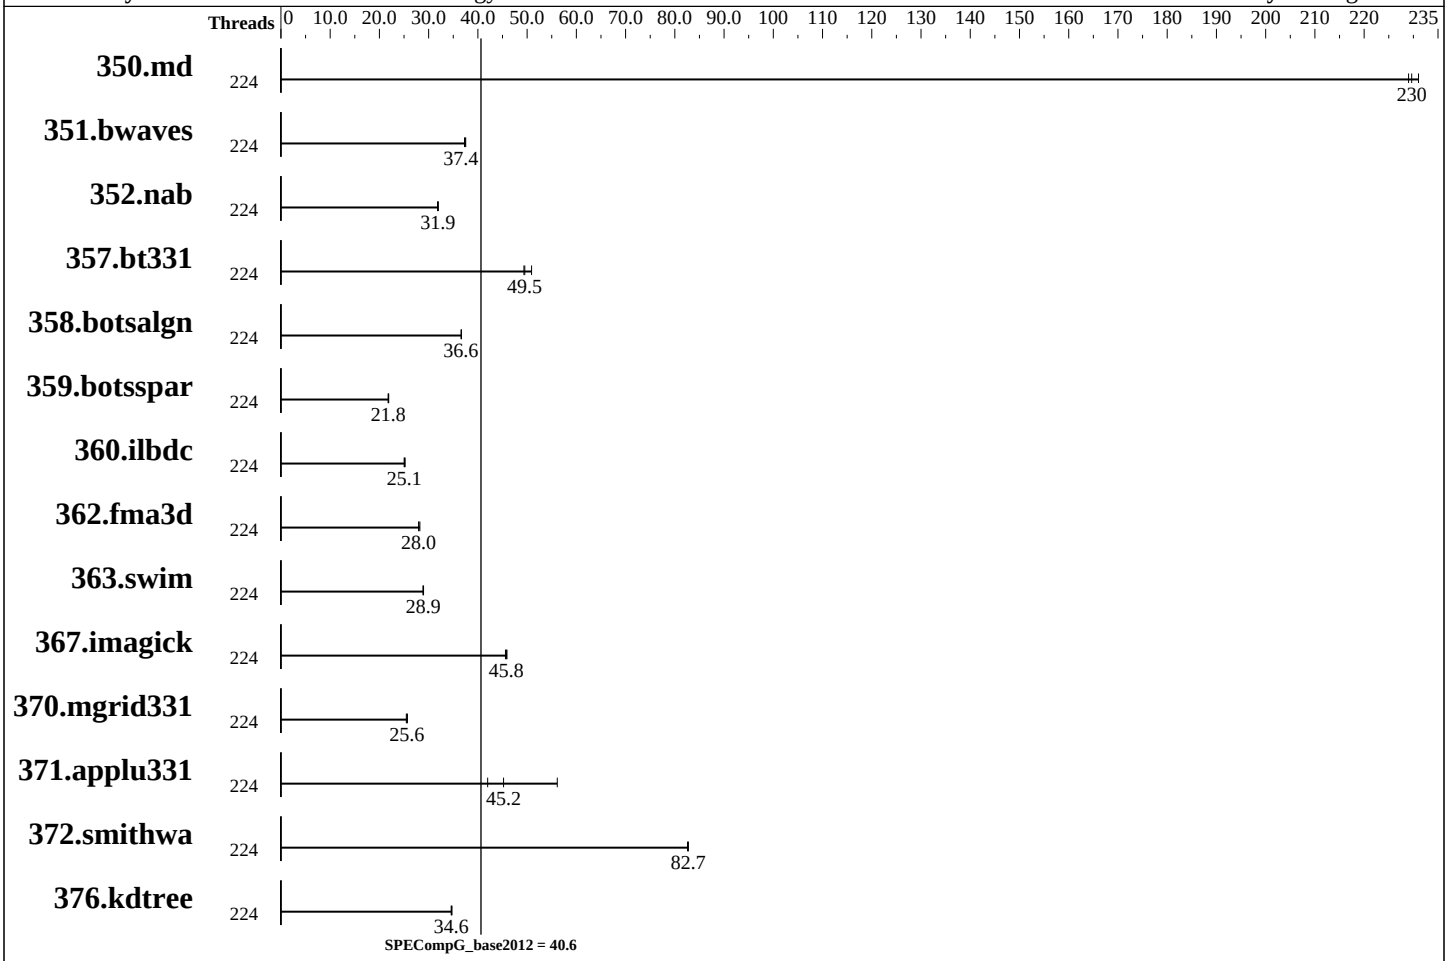

Hardware

CPU Name:	Intel Xeon Platinum 8180
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2500
CPU MHz Maximum:	3800
FPU:	Integrated
CPU(s) enabled:	112 cores, 4 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable:	2,3,4,6,8 Chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	39424 KB I+D on chip per chip
Other Cache:	None
Memory:	768 GB (48 x 16 GB 2Rx8 PC4-2666V)
Disk Subsystem:	0.96TB NVMe SSD
Other Hardware:	None
Base Threads Run:	224
Minimum Peak Threads:	--

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.5, Kernel 3.10.0-862.3.2.el7.x86_64
Compiler:	C/C++/Fortran: Version 18.0.3.222 of Intel Composer XE for Linux Build 20180516
Auto Parallel:	No
File System:	ext3
System State:	Default
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other Software:	None

SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR950

SPECompG_peak2012 = Not Run

SPECompG_base2012 = 40.6

OMP2012 license:28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2018
Hardware Availability: Aug-2017
Software Availability: Aug-2018

Maximum Peak Threads: --

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	224	**20.2**	**230**	20.0	231	20.2	229							
351.bwaves	224	122	37.3	**121**	**37.4**	121	37.5							
352.nab	224	122	31.8	**122**	**31.9**	122	32.0							
357.bt331	224	**95.7**	**49.5**	96.0	49.4	93.1	50.9							
358.botsalgn	224	**119**	**36.6**	119	36.7	119	36.6							
359.botsspar	224	240	21.9	241	21.8	**241**	**21.8**							
360.ilbdc	224	**142**	**25.1**	142	25.0	141	25.2							
362.fma3d	224	136	28.0	**136**	**28.0**	135	28.2							
363.swim	224	157	28.9	**157**	**28.9**	156	29.0							
367.imagick	224	153	45.9	154	45.6	**154**	**45.8**							
370.mgrid331	224	**173**	**25.6**	172	25.7	174	25.5							
371.applu331	224	**134**	**45.2**	108	56.1	144	42.0							
372.smithwa	224	64.8	82.7	**64.8**	**82.7**	64.9	82.6							
376.kdtree	224	130	34.6	**130**	**34.6**	130	34.7							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
ulimit -s unlimited
```

Platform Notes

```
Sysinfo program /home/omp2012/Docs/sysinfo
$Rev: 395 $ $Date:: 2012-07-25 #$ 8f8c0fe9e19c658963a1e67685e50647
running on localhost.localdomain Tue Jul 24 20:09:25 2018

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/omp2012/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      4 "physical id"s (chips)
      224 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 28
         siblings  : 56
         physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
         25 26 27 28 29 30
         physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
         25 26 27 28 29 30
         physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
         25 26 27 28 29 30
         physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
         25 26 27 28 29 30
      cache size : 39424 KB

   From /proc/meminfo
      MemTotal:       791969344 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      os-release:
         NAME="Red Hat Enterprise Linux Server"
         VERSION="7.5 (Maipo)"
         ID="rhel"
         ID_LIKE="fedora"
         VARIANT="Server"
         VARIANT_ID="server"
         VERSION_ID="7.5"
         PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
      redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
      system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server

   uname -a:
      Linux localhost.localdomain 3.10.0-862.el7.x86_64 #1 SMP Wed Mar 21 18:14:51
      EDT 2018 x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Jul 24 13:40

   SPEC is set to: /home/omp2012
      Filesystem            Type  Size  Used Avail Use% Mounted on
      /dev/mapper/rhel-home xfs   839G   16G  823G   2% /home

   Additional information from dmidecode:
     BIOS Lenovo -[PSE113P-1.30]- 06/14/2018
     Memory:
      48x NO DIMM NO DIMM
      48x Samsung M393A2K43BB1-CTD 16 GB 2666 MHz 2 rank

   (End of data from sysinfo program)
```

General Notes

```
================================================================================
General base OMP Library Settings
  ENV_KMP_AFFINITY=compact,1

================================================================================
General OMP Library Settings
  KMP_LIBRARY=turnaround
  KMP_STACKSIZE=16G
  KMP_BLOCKTIME=infinite
  OMP_DYNAMIC=FALSE
  OMP_NESTED=FALSE
  OMP_SCHEDULE=static

================================================================================
BIOS setting notes:
Operating Mode set to Maximum Performance Mode
================================================================================
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:
-O2 -qopenmp -ipo -xHOST -ansi-alias

C++ benchmarks:
-O2 -qopenmp -ipo -xHOST -ansi-alias

Fortran benchmarks:
-O2 -qopenmp -ipo -xHOST -align array64byte

The flags files that were used to format this result can be browsed at
http://www.spec.org/omp2012/flags/Lenovo-Platform-Flags-V1.2-SKL-C.html
http://www.spec.org/omp2012/flags/lenovo.20180912.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/omp2012/flags/Lenovo-Platform-Flags-V1.2-SKL-C.xml
http://www.spec.org/omp2012/flags/lenovo.20180912.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.0.
Report generated on Wed Sep 12 12:15:48 2018 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 12 September 2018.