CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
HP 9000 Model L3000

SPECint_rate2000 = 4.50

SPECint_rate_base2000 = 4.32

SPEC license #: 3 | Tested by: HP Richardson, TX | Test date: Nov-2000 | Hardware Avail: Nov-2000 | Software Avail: Nov-2000

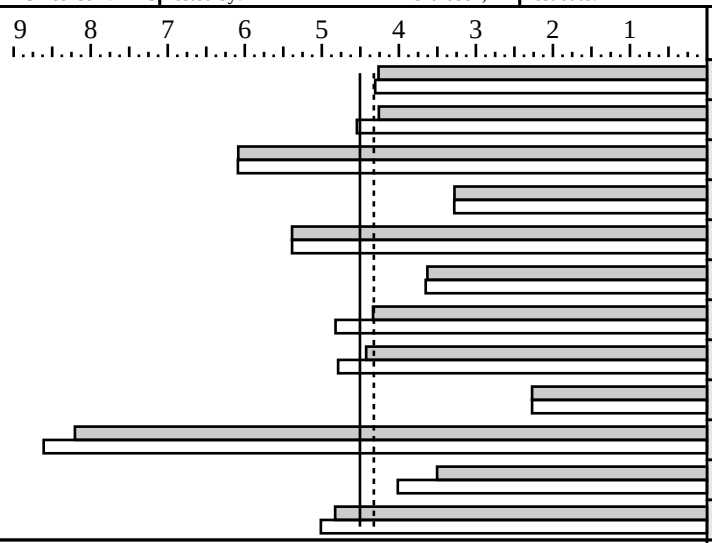

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	381	4.26	1	377	4.31
175.vpr	1	381	4.26	1	357	4.54
176.gcc	1	210	6.08	1	210	6.09
181.mcf	1	637	3.28	1	636	3.28
186.crafty	1	215	5.39	1	215	5.39
197.parser	1	575	3.63	1	572	3.65
252.eon	1	348	4.34	1	313	4.82
253.perlbmk	1	472	4.42	1	436	4.79
254.gap	1	562	2.27	1	562	2.27
255.vortex	1	269	8.20	1	256	8.61
256.bzip2	1	497	3.50	1	434	4.01
300.twolf	1	721	4.83	1	694	5.01

Hardware

CPU:	550 MHz PA-8600
CPU MHz:	550
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-4
Parallel:	No
Primary Cache:	512KBI+1MBD (on chip)
Secondary Cache:	none
L3 Cache:	none
Other Cache:	None
Memory:	8GB
Disk Subsystem:	2x36 GB 10000RPM
Other Hardware:	--

Software

Operating System:	HP-UX B.11.0
Compiler:	HP92453-01 A.11.01.20 HP C Compiler B3913DB C.03.25 HP aC++ Compiler (S800)
File System:	HP-UX HFS
System State:	Multi-user

Notes/Tuning Information

```
Portability flags:
175.vpr: -DSPEC_CPU2000 ; 176.gcc: -DHOST_WORDS_BIG_ENDIAN
181.mcf: -DWANT_STDC_PROTO ; 186.crafty: -DHP -DSPEC_CPU2000
197.parser: -DSPEC_CPU2000 ; 252.eon: -DFMAX_IS_DOUBLE -DNDEBUG
253.perlbmk: -DSPEC_CPU2000_HP ; 254.gap: -DSPEC_CPU2000_HP
-DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO
300.twolf: -DSPEC_CPU2000

Compiler invoked in extended ANSI mode: cc -Ae
Base flags:
 cc: +Oall +Ostatic_prediction -Wl,-aarchive +I/+P
c++: +O3 +Ostatic_prediction -Wl,-aarchive +I/+P

Peak flags:
Peak flags = base flags for 186.crafty and 254.gap
        all: +Ostaticprediction -Wl,-aarchive  +I/+P
   164.gzip: +Oall +Optrs_strongly_typed +Oinline_budget=800
             -Wl,/opt/langtools/lib/fastmem.o
    175.vpr: +Oall  +Optrs_strongly_typed +Owhole_program_mode
    176.gcc: +Oall +ESlit +ESfic
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    181.mcf: +Oall +Opromote_indirect_calls
 186.crafty: basepeak
 197.parser: +Oall +Odataprefetch +ESfic +Oinline_budget=400
    252.eon: +noeh +O4 +Optrs_strongly_typed +Olibcalls
253.perlbmk: +Oall +ESlit +ESfic -Wl,/opt/langtools/lib/fastmem.o
    254.gap: basepeak
 255.vortex: +Oall +Oinline_budget=800 +Optrs_strongly_typed
             -Wl,/opt/langtools/lib/fastmem.o
  256.bzip2: +Oall +Odataprefetch +Optrs_strongly_typed
  300.twolf: +Oall +Optrs_strongly_typed
Kernel tunables:
vps_pagesize=4096, vps_ceiling=16384, maxdsiz=0X040000000, maxssiz=0X10000000, dbc_max_pct=10, dbc_min_pct=10
Unused processors disabled at boot
Event Monitoring System disabled.
```