CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers
PRIMEPOWER800/1000/2000 (450MHz)

SPECint2000 = 312

SPECint_base2000 = 286

SPEC license #: 22 | Tested by: Fujitsu Limited | Test date: Feb-2001 | Hardware Avail: Jan-2001 | Software Avail: Apr-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	511	274	511	274
175.vpr	1400	531	264	497	282
176.gcc	1100	542	203	387	284
181.mcf	1800	547	329	537	335
186.crafty	1000	328	305	295	339
197.parser	1800	600	300	602	299
252.eon	1300	408	318	379	343
253.perlbmk	1800	567	317	529	340
254.gap	1100	572	192	571	193
255.vortex	1900	415	458	405	469
256.bzip2	1500	511	294	501	299
300.twolf	3000	1147	262	815	368

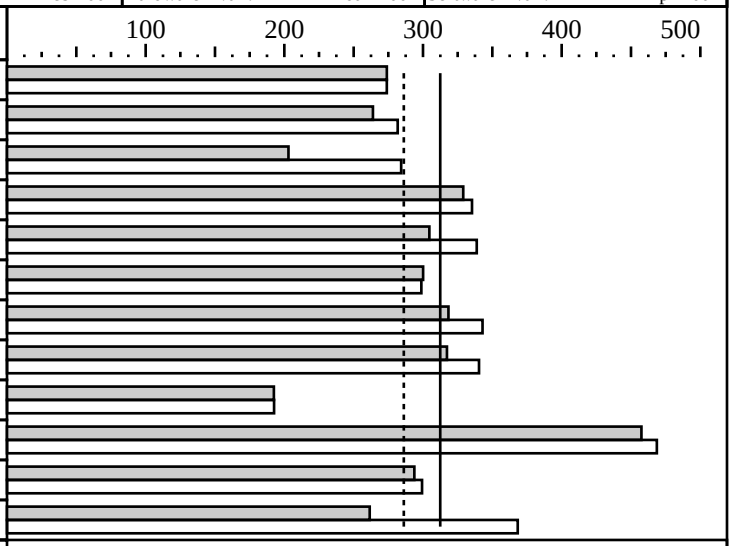

Hardware

CPU:	SPARC64 GP
CPU MHz:	450
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	4 to 16/4 to 32/8 to 128
Parallel:	None
Primary Cache:	128KBI+128KBD on chip
Secondary Cache:	8MB(I+D) off chip, per CPU
L3 Cache:	None
Other Cache:	None
Memory:	8192MB
Disk Subsystem:	1 x 18.2GB SCSI (10025rpm)
Other Hardware:	Ethernet

Software

Operating System:	Solaris 8
Compiler:	Fujitsu Parallelnavi 1.0.1 Sun Forte Developer 6 update 1
File System:	ufs
System State:	single user

Notes/Tuning Information

```
Baseline (except 252.eon, for Parallelnavi 1.0.1): -Kfast_GP=3,largepage
 fdo_pre0=rm -rf ‘pwd‘/*.fbk
 PASS1=-Kpg
 PASS2=-Kpu=$(EXEBASE).fbk
(252.eon, for Forte Developer 6 update 1): -fast -xcrossfile -xarch=v8plus
 fdo_pre0=rm -rf ‘pwd‘/../feedback.profile ‘pwd‘/SunWS_cache
 PASS1=-xprofile=collect:‘pwd‘/../feedback
 PASS2=-xprofile=use:‘pwd‘/../feedback

Peak (for Parallelnavi 1.0.1):
 fdo_pre0=rm -rf ‘pwd‘/*.fbk
 PASS1=-Kpg
 PASS2=-Kpu=$(EXEBASE).fbk
 164.gzip: -Kfast_GP=3,largepage
 175.vpr: -Kfast_GP=4,staticclump,memalias,switchopt,cond,GREG,nounroll,largepage,onefile,NOFLTLD=3,xi=30
 181.mcf: -Kfast_GP=2,nounroll,memalias,restp,prefetch=4,largepage -x-
 186.crafty: -Kfast_GP=3,switchopt,cond,noiopt,staticclump,xi=6,memalias,largepage
 197.parser: -Kfast_GP=3,switchopt,cond,staticclump,use_rodata,largepage,funcalign=128
 253.perlbmk: -Kfast_GP=3,memalias,switchopt,largepage,bcopy
 254.gap: -Kfast_GP=3,largepage
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

256.bzip2: Kfast_GP=3,NOFLTLD=1,use_rodata,staticclump,xi=8,cfunc,memalias,restp,largepage,funcalign=128
300.twolf: -Kfast_GP=5,GREG,popt,cfunc,staticclump,use_rodata,xi=10,nounroll,largepage,bcopy
(for Forte Developer 6 update 1)
fdo_pre0=rm -rf ‘pwd‘/../feedback.profile ‘pwd‘/SunWS_cache
PASS1=-xprofile=collect:‘pwd‘/../feedback
PASS2=-xprofile=use:‘pwd‘/../feedback
176.gcc: -fast -xcrossfile -W2,-whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4,-Qiselect-funcalign=64
-xarch=v8plus -xprefetch
252.eon: -fast -xcrossfile -xregs=syst -xsafe=mem -Qoption iropt -Mt500,-restrict_g,-restrict
-Qoption cg -Qgsched-trace_late=1,-Qgsched-trace_spec_load=1,-Qgsched-T4 -xarch=v8plus
-lmopt
255.vortex: -fast -xsafe=mem -xcrossfile -W2,-Aheap,-reroll=1,-Aunroll,-Ms1,-Mt500,-Mr6000,-crit
-Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=32 -Wc,-Qpeep-Sh0
-xrestrict -xdepend -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xarch=v8plus

Portability:
176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
186.crafty: -DSUN
252.eon: -library=iostream,no%Cstd
253.perlbmk: -DSPEC_CPU2000_SOLARIS -lnsl -lsocket
254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
-DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Note:
System Tunables: (for /etc/system)
consistent_coloring=1, tune_t_fsflushr=86400, autoup=86400,
shmsys:shminfo_shmmax=268435456, shmsys:shminfo_shmmni=1024, shmsys:shminfo_shmseg=1024
(for /etc/opt/FJSVpnrm/lpg.conf)
TSS=512M, SHMSEGSIZE=256M
ONESTEP=yes was set for all baseline and peak benchmarks.
Feedback directed optimization was used for all baseline and peak benchmarks.

Also used:
-Xa (base and peak, except where noted) for 176.gcc (base only), 181.mcf, 186.crafty, 197.parser (peak only), 254.gap
-dy (base) for all benchmarks except 252.eon, -dy (peak) for all except 176.gcc, 252.eon, 255. vortex
-DWANT_STD_PROTO for 181.mcf (base and peak), -DCPU2000 for 186.crafty (base and peak),
-DSUN -DCPU2000 for 197.parser (peak)
The flags listed above as "also used" were used for the actual compilation,
but they had no effect (-D flags), were the compiler’s default (-Xa), or the compiler’s
default when -Klargepage is used (-dy).
They are not necessary for result reproduction and can be omitted.