CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI 2100 1X 350MHz R12k

SPECint2000 = 289

SPECint_base2000 = 280

SPEC license #: 4 | Tested by: SGI | Test date: Jan-2001 | Hardware Avail: Jun-2000 | Software Avail: Mar-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	713	196	687	204
175.vpr	1400	444	316	426	329
176.gcc	1100	400	275	405	272
181.mcf	1800	440	409	439	410
186.crafty	1000	344	290	350	286
197.parser	1800	760	237	712	253
252.eon	1300	423	308	404	322
253.perlbmk	1800	855	211	852	211
254.gap	1100	606	182	613	180
255.vortex	1900	485	391	418	455
256.bzip2	1500	545	275	493	304
300.twolf	3000	768	391	790	380

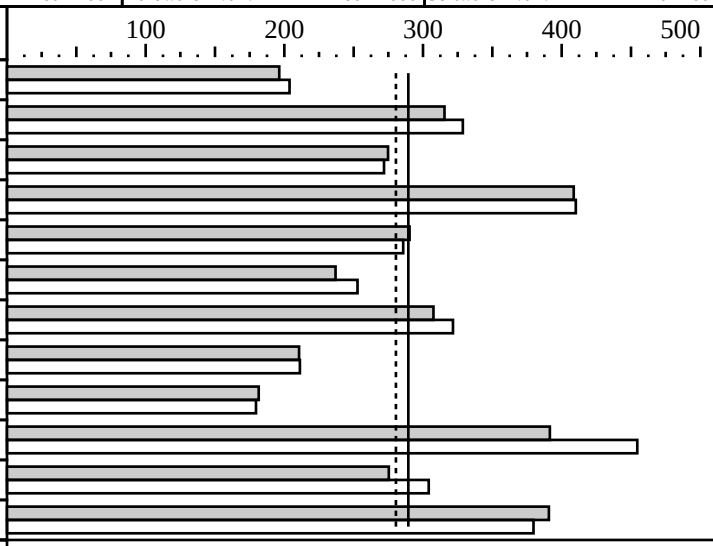

Hardware

CPU:	R12000
CPU MHz:	350
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-8
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	4MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	1 GB
Disk Subsystem:	1 x 18 GB FC, 2 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.10f
Compiler:	MIPSpro 7.3.1.2m C, C++, Fortran90 SCSL 1.3 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (C and C++ use same flags):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR/base/$(EXEBASE)
Portability Flags:
   176.gcc: -DUSG  -Dalloca=__builtin_alloca -DMIPS -DHOST_WORDS_BIG_ENDIAN
   186.crafty: -DSGI
   252.eon: -lm
   253.perlbmk: -DSPEC_CPU2000_SGI -DI_FCNTL
   254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_IOCTL_PROTO
            -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
   300.twolf: -DHAVE_SIGNED_CHAR
Peak optimization flags:
note:  all occurances of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
 164.gzip: -Ofast=ip27 -IPA:space=500:plimit=500 -lmalloc (FEEDBACK)
 175.vpr: -Ofast=ip27 -IPA:space=300:plimit=10000:callee_limit=5000:linear=on -LNO:prefetch_ahead=2
 .        -INLINE:aggressive=on -OPT:Olimit=0:alias=disjoint:alias=restrict -lmalloc (FEEDBACK)
 181.mcf: -Ofast=ip27 -IPA:min_hot=14 -lmalloc (FEEDBACK)
 176.gcc: -Ofast=ip27 (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

186.crafty: -Ofast=ip27 -LNO:prefetch=0 -OPT:goto=off -lmalloc (FEEDBACK)
197.parser: -Ofast=ip27 -IPA:min_hot=14 (FEEDBACK)
252.eon: -Ofast=ip27 -LNO:prefetch=0 -LANG:exceptions=off -lmalloc (FEEDBACK)
253.perlbmk: -Ofast=ip27 -IPA:use_intrinsic -Wl,-x (FEEDBACK)
254.gap: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4
. -OPT:alias=restrict:alias=disjoint -IPA:min_hot=7 -lmalloc (FEEDBACK)
255.vortex: -Ofast=ip27 -IPA:use_intrinsic -OPT:unroll_analysis=off:unroll_size=0:unroll_times_max=4 -LNO:opt=0
. -CG:ld_latency=5 -IPA:min_hot=14 -TENV:X=4 -IPA:space=500:plimit=3600 -OPT:goto=off (FEEDBACK)
256.bzip2: -Ofast=ip27 -IPA:min_hot=5:space=500:plimit=2900 -INLINE:aggressive=on (FEEDBACK)
300.twolf: -Ofast=ip27 -IPA:use_intrinsic (FEEDBACK)

The following O/S parameters were set:
setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
limit stacksize 500000

The following is done before building each benchmark that requires (FEEDBACK):
rm -rf /tmp/SPEC2000 ; mkdir /tmp/SPEC2000 ; cd /tmp/SPEC2000 ; mkdir FBDIR_base ; mkdir FBDIR_peak