CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

Epox 8KHA+ Motherboard, AMD Athlon (TM) XP 1700+

SPECint2000 = 656

SPECint_base2000 = 633

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Oct-2001 | Hardware Avail: Nov-2001 | Software Avail: Jul-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	198	708	196	714
175.vpr	1400	348	402	325	430
176.gcc	1100	255	431	215	512
181.mcf	1800	539	334	548	328
186.crafty	1000	115	867	115	867
197.parser	1800	307	586	306	587
252.eon	1300	111	1174	99.8	1303
253.perlbmk	1800	198	908	198	908
254.gap	1100	153	720	152	723
255.vortex	1900	194	980	191	993
256.bzip2	1500	289	519	275	545
300.twolf	3000	586	512	575	521

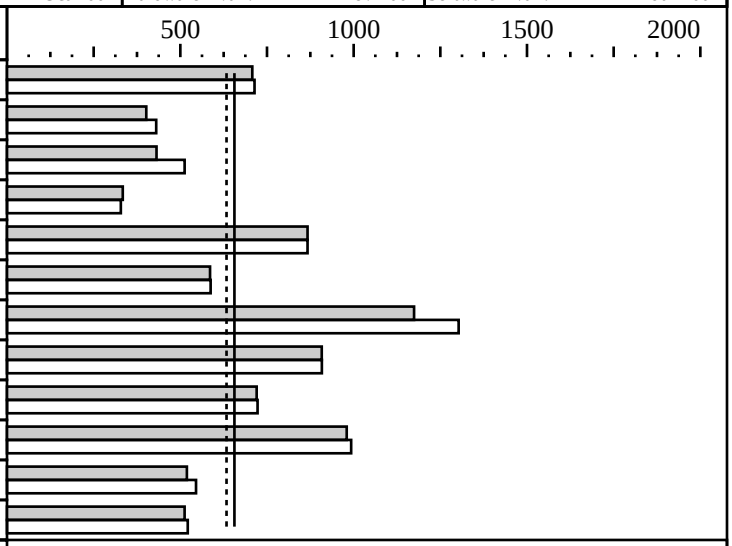

Hardware

CPU:	AMD Athlon (TM) XP 1700+
CPU MHz:	1466
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x128MB PC2100 DDR SDRAM CL2
Disk Subsystem:	Seagate ST320414A
Other Hardware:	None

Software

Operating System:	Windows 2000 SP1
Compiler:	Intel C/C++ 5.0.1 build 010525Z Microsoft Visual Studio 6.0 SP5 (libraries) MicroQuill Smartheap Library 5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
176.gcc: -Dalloca=_alloca /F10000000
186.crafty:   -DNT_i386
253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap:  -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -QxK -Qipo +FDO shlW32M.lib
Baseline C++: -QxK -Qipo -GX -GR
Peak tuning:
164.gzip:     -O3 -QxK -Qwp_ipo -Oi- +FDO
175.vpr:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
176.gcc:      -O3 -QxK -Qwp_ipo -Oi- +FDO shlW32M.lib
181.mcf:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
186.crafty:   -O3 -QxK -Qwp_ipo -Oa +FDO shlW32M.lib
197.parser:   -O3 -Qxi -QaxK -Qwp_ipo +FDO
252.eon:      -O3 -QxiM -Qwp_ipo +FDO
253.perlbmk:  -O3 -QxK -Qipo +FDO shlW32M.lib
254.gap:      -O3 -QxK -Qipo -Oi- +FDO shlW32M.lib
255.vortex:   -O3 -QxK -Qwp_ipo +FDO shlW32M.lib
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 256.bzip2:    -O3 -QxK -Oa -Qwp_ipo
 300.twolf:    -O3 -QxK -Qipo -Oa +FDO shlW32M.lib
 ONESTEP is used for all base and peak runs
The tested system can be assembled using an ATX case such as the Antec KS-282,
a 300W power supply such as the Sparkle FSP300-60GT, and a PCI or AGP video card.
The System bus runs at 266MHz
```