CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K7 Motherboard, AMD Athlon (TM) MP 1500+

SPECfp_rate2000 = 9.78

SPECfp_rate_base2000 = 9.17

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Sep-2001 | Hardware Avail: Oct-2001 | Software Avail: Sep-2001

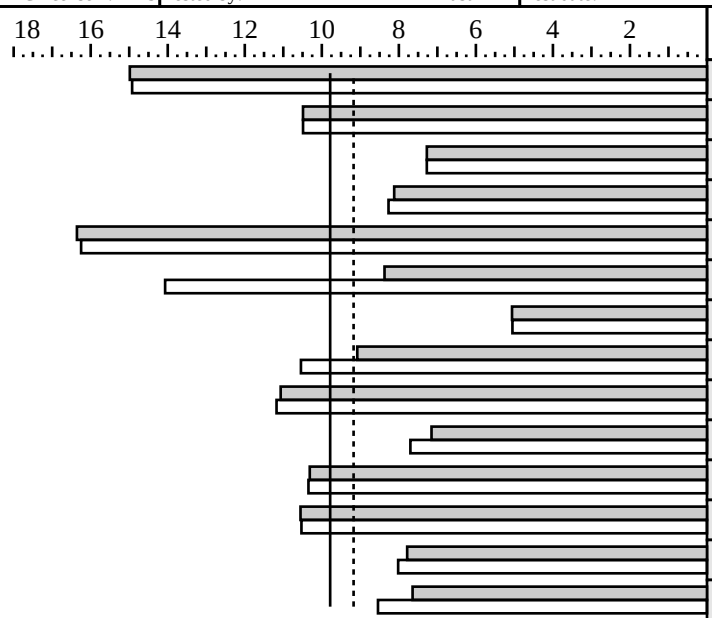

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	248	15.0	2	249	14.9
171.swim	2	686	10.5	2	686	10.5
172.mgrid	2	574	7.27	2	574	7.27
173.applu	2	600	8.12	2	589	8.27
177.mesa	2	199	16.4	2	200	16.2
178.galgel	2	804	8.37	2	478	14.1
179.art	2	1192	5.06	2	1194	5.05
183.equake	2	332	9.08	2	286	10.5
187.facerec	2	398	11.1	2	394	11.2
188.ammp	2	714	7.15	2	663	7.70
189.lucas	2	450	10.3	2	448	10.3
191.fma3d	2	462	10.6	2	463	10.5
200.sixtrack	2	328	7.78	2	318	8.02
301.apsi	2	789	7.64	2	706	8.54

Hardware

CPU:	AMD Athlon (TM) MP 1500+
CPU MHz:	1333
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1, 2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x256MB PC2100 DDR SDRAM CL2 Registered
Disk Subsystem:	IBM DPTA-372020
Other Hardware:	None

Software

Operating System:	Windows 2000 SP2
Compiler:	Compaq Visual Fortran 6.6 Intel C/C++ 5.0.1 build 010525Z Intel Fortran 5.0.1 build 010525Z Microsoft Visual Studio 6.0 SP5 (libraries) MicroQuill Smartheap Library 5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
icl and ifl are the Intel C/C++ and Fortran compilers
f90 is the Compaq Fortran compiler
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
Portability:
178.galgel: -FI -Fe$@ -link -stack:32000000
Baseline: C       icl -QxK -Qipo +FDO shlW32M.lib
Baseline: Fortran ifl -O3 -QxK -Qipo +FDO
Peak tuning:
168.wupwise:  ifl -O3 -QxK -Qwp_ipo +FDO
171.swim:     ifl -O3 -QxK -Qwp_ipo +FDO
172.mgrid:    ifl -O3 -QxK -Qwp_ipo +FDO
173.applu:    ifl -O3 -QxK -Qwp_ipo -Qscalar_rep- -Qauto +FDO
177.mesa:     icl -O3 -QxK -Qwp_ipo -Oa -Qunroll0 +FDO shlw32M.lib
178.galgel:   f90 -Optimize:5 -fast
179.art:      icl -O3 -QxK -QaxW -Qwp_ipo -Oa +FDO shlW32M.lib
183.equake:   icl -O3 -QxK -Qwp_ipo -Qrcd -Oa +FDO shlW32M.lib
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 187.facerec:  f90 -Optimize:5 -fast
 188.ammp:     icl -O3 -QxK -Qwp_ipo -Oa +FDO
 189.lucas:    ifl -O3 -QxK -Qwp_ipo +FDO shlW32M.lib
 191.fma3d:    ifl -O3 -QxK -Qwp_ipo +FDO
 200.sixtrack: ifl -QxK -QaxW -Qwp_ipo -Qprefetch +FDO
 301.apsi:     f90 -Optimize:5 -fast
 Library ordering for 189.lucas (to include SmartHeap correctly with default libs):
 LIBS=libIEPCF90.lib libintrins.lib libF90.lib
 libqwind.lib libm.lib shlW32M.lib LIBC.lib libirc.lib OLDNAMES.lib
 ONESTEP is used for all base and peak runs
 The tested system can be assembled using a case such as the Chenming 601 AE-F-O,
 a 460W power supply such as the Delta Electronics DPS465 AB A
The System bus runs at 266MHz
```