CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V480

SPECint2000 = 531

SPECint_base2000 = 469

SPEC license #: 6 | Tested by: Sun Microsystems, Palo Alto | Test date: May-2002 | Hardware Avail: Jun-2002 | Software Avail: May-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	381	367	346	404
175.vpr	1400	353	397	312	448
176.gcc	1100	217	506	191	576
181.mcf	1800	331	544	275	654
186.crafty	1000	200	501	168	593
197.parser	1800	427	422	343	524
252.eon	1300	262	496	253	514
253.perlbmk	1800	386	466	359	502
254.gap	1100	333	330	332	332
255.vortex	1900	296	641	223	852
256.bzip2	1500	276	543	264	569
300.twolf	3000	596	503	530	566

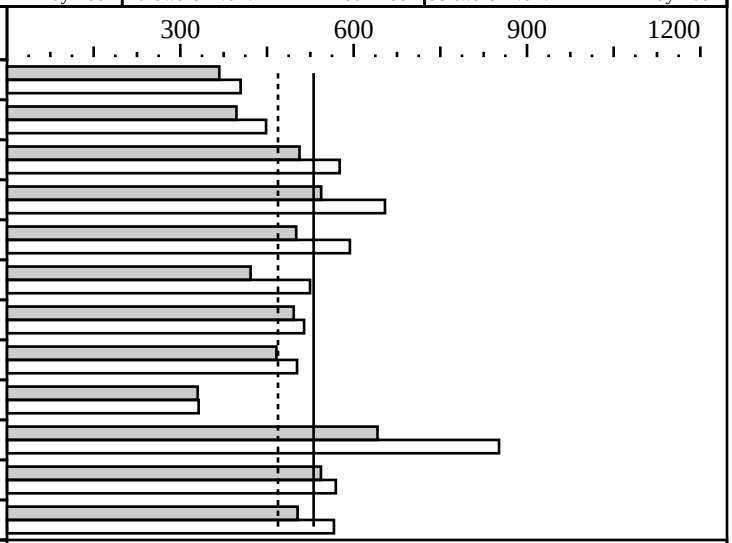

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	900
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	2,4
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	2GB
Disk Subsystem:	1 x 36GB + 1 x 18GB
Other Hardware:	None

Software

Operating System:	Solaris 8 02/02
Compiler:	Sun ONE Studio 7 with patch 111704-01 Sun Performance Library 7
File System:	tmpfs
System State:	Multi-User

Notes/Tuning Information

```
Portability:
 176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty: -DSUN
 252.eon: -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
          -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Base Flags:
 Base C   flags: -fast -xcrossfile -ll2amm -xprofile
 Base C++ flags: -fast -xcrossfile -xprofile

Peak Flags:
 164.gzip: -xO5 -xtarget=native -xalias_level=std -W2,-whole -xcrossfile -W2,-Ainline -xprofile
 175.vpr: -fast -xalias_level=std -xcrossfile -xsfpconst -W2,-whole
          -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,-Qeps:rp_filtering_margin=100
          -xregs=syst -lmopt -xprofile
 176.gcc: -fast -xcrossfile -W2,-whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -ll2amm -xprofile
 181.mcf: -fast -xcrossfile -Wc,-Qms_pipe-pref,-Qlp=1-fa=1-av=64-t=3-fl=1
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
          -lprism32 -xprofile
 186.crafty: -fast -xF -xinline= -xcrossfile -Wc,-Qgsched-trace_late=1,-Qgsched-T4
             -xalias_level=strong -xregs=syst -W2,-Ashort_ldst,-Aivel:duplicate_loops
             -xprofile
 197.parser: -fast -xprefetch=no%auto -xcrossfile -xregs=syst
          -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xalias_level=strong -Wc,-Qipa:valueprediction -xprofile
 252.eon: -fast -xcrossfile -xalias_level=compatible -xsafe=mem -Qoption iropt -Mt500,-xrestrict
          -Qoption cg -Qgsched-trace_late=1,-Qgsched-T4 -lmopt -xprofile
 253.perlbmk: -xO5 -xtarget=native -xcrossfile -xalias_level=std -xsafe=mem
              -Wc,-Qgsched-trace_late=1,-Qgsched-T4,-Qgsched-trace_spec_load=1
              -Wc,-Qinline_memcpy=32 -Wc,-Qiselect-funcalign=32,-Qicache-chbab=1
              -Wc,-Qiselect-sw_pf_tbl_th=20 -xprofile
 254.gap: -fast -xcrossfile -xalias_level=std -xprefetch -W2,-whole -lprism32 -xprofile
 255.vortex: -fast -xcrossfile -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1
            -Wc,-Qinline_memcpy=32 -W2,-Aheap,-reroll=1,-Aunroll,-Ms1,-Mt500,-Mr6000,-crit
             -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=32
             -Wc,-Qpeep-Sh0 -xrestrict -ll2amm -lprism32 -xprofile
 256.bzip2: -fast -W2,-Abopt -xcrossfile -xalias_level=strong
            -Wc,-Qiselect-funcalign=32 -xregs=syst -xprofile
 300.twolf: -fast -xalias_level=strong -xsafe=mem -xcrossfile -xprefetch=no%auto
            -Wc,-Qms_pipe+intdivusefp -xprofile
ONESTEP=yes for all benchmarks in base and peak

Shell Environments:
 LD_LIBRARY_PATH=/usr/lib:/opt/SUNWspro/lib/v8plusb:/opt/SUNWspro/prod/lib/v8plusb
 PRISM_HEAP=268435456
 PRISM_MODE=2

 Stack size set to unlimited via "ulimit -s unlimited"

System Settings:
 2nd CPU disabled at the firmware level using "ASR"

Kernel Parameters (/etc/system):
 set shmsys:shminfo_shmmin=1
 set shmsys:shminfo_shmmax=1477846784
 set shmsys:shminfo_shmmni=256
 set shmsys:shminfo_shmseg=400

System configuration details located (as of Jun 2002) at
    http://www.sun.com/servers/entry/
```