CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850EMV2 motherboard (2.4 GHz, Pentium 4 processor)

SPECint2000 = 882

SPECint_base2000 = 878

SPEC license #: 13 | Tested by: Intel Corporation | Test date: May-2002 | Hardware Avail: May-2002 | Software Avail: Apr-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	141	993	141	995
175.vpr	1400	256	547	256	546
176.gcc	1100	103	1064	104	1060
181.mcf	1800	293	614	293	614
186.crafty	1000	108	922	109	915
197.parser	1800	213	843	214	843
252.eon	1300	127	1023	118	1099
253.perlbmk	1800	166	1084	166	1083
254.gap	1100	95.8	1148	95.9	1147
255.vortex	1900	128	1485	129	1475
256.bzip2	1500	216	694	216	696
300.twolf	3000	519	578	520	577

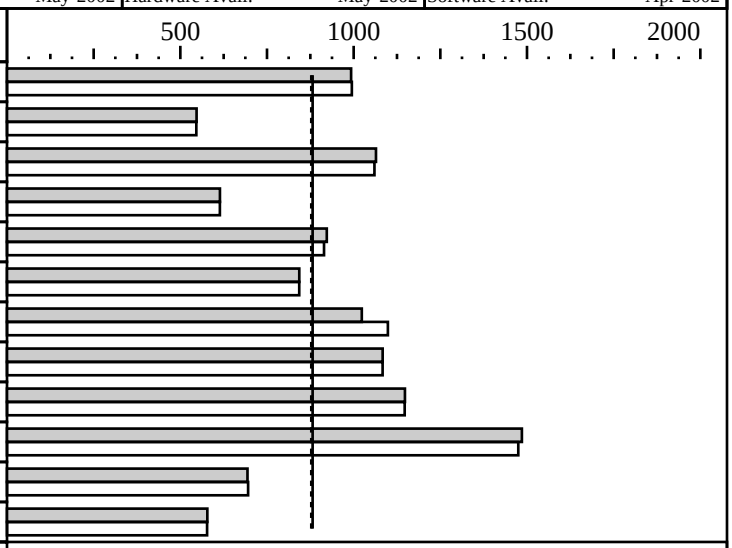

Hardware

CPU:	Pentium 4 processor (2.4 GHz, 533 MHz bus)
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 8KBD on chip
Secondary Cache:	512KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800-40 RDRAM non-ECC modules)
Disk Subsystem:	IBM 120GXP 80 GB IC35L080AVVA07-0 ATA-100
Other Hardware:	None

Software

Operating System:	Windows XP Professional(Build 2600)
Compiler:	Intel C++ Compiler 6.0 Build 020321Z Intel Fortran Compiler 6.0 Build 020321Z Microsoft Visual C++ 6.0 SP5(for libraries)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -QxW -Qipo -O3 +FDO
Base tuning for C++ programs: -QxW -Qipo -GX -GR
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -QxW -Qipo -Oa -O3 +FDO
175.vpr:      -QxW -Qwp_ipo -O3 +FDO
176.gcc:      -QxW -Qipo -O3 +FDO
181.mcf:      -QxW -Qipo -O3 +FDO
186.crafty:   -QxW -Qipo -Oa -O3 +FDO
197.parser:   -QxW -Qipo -O3 +FDO
252.eon:      -QxW -Qipo -O3 +FDO
253.perlbmk:  -QxW -Qipo -O3 +FDO
254.gap:      -QxW -Qipo -O3 +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 8/2002:
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
http://developer.intel.com/design/motherbd/mv2/index.htm
Motherboard ordering information is available at:
http://program.intel.com/shared/products/boards/d850emv2/index.htm
The system bus runs at 533 MHz
```