CFP2000 Result

Hewlett-Packard Company
AlphaServer ES47 7/1000

SPECfp2000 = 1288
SPECfp_base2000 = 975

SPEC license #: 2	Tested by: HP	Test date: Dec-2002	Hardware Avail: Jan-2003	Software Avail: Jan-2003

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	210	760	86.7	1846
171.swim	3100	99.1	3130	99.1	3130
172.mgrid	1800	293	614	192	938
173.applu	2100	159	1318	156	1345
177.mesa	1400	173	808	145	965
178.galgel	2900	158	1830	157	1851
179.art	2600	149	1741	92.4	2814
183.equake	1300	290	449	94.2	1381
187.facerec	1900	198	961	178	1069
188.ammp	2200	345	638	299	735
189.lucas	2000	150	1331	138	1453
191.fma3d	2100	238	883	177	1186
200.sixtrack	1100	272	404	252	437
301.apsi	2600	241	1078	225	1158

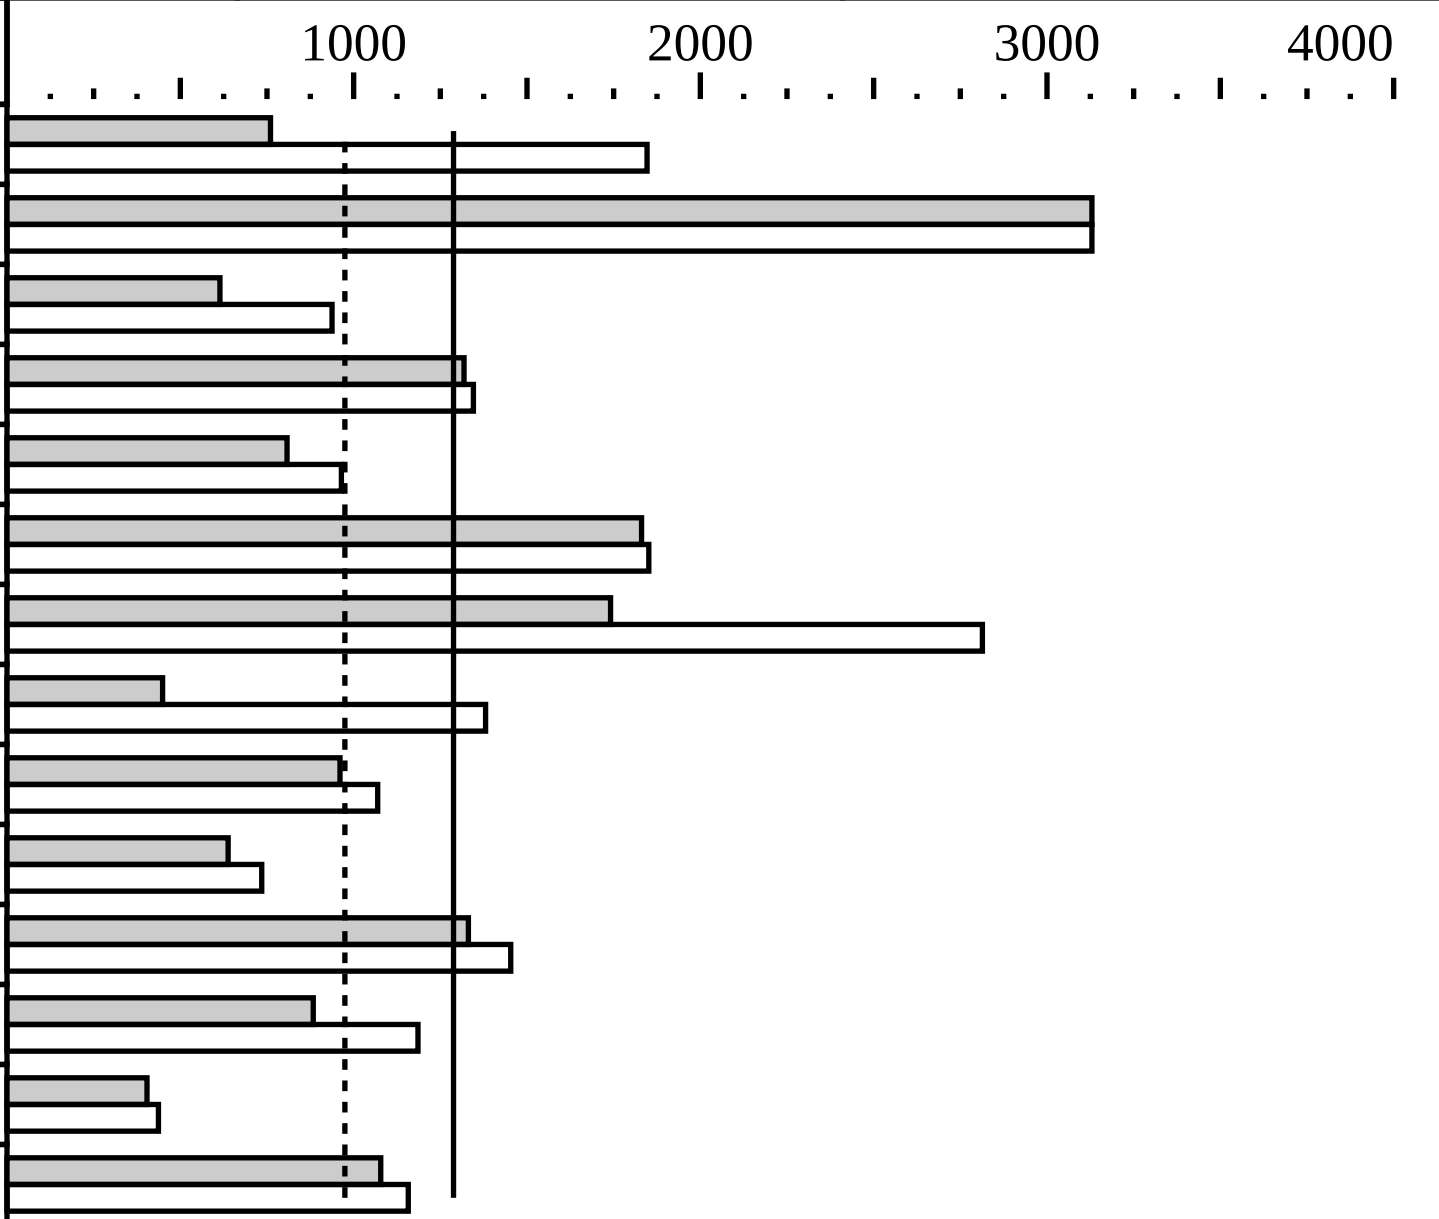

Hardware

CPU:	Alpha 21364
CPU MHz:	1000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	2 to 4
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	1.75MB on chip per CPU
L3 Cache:	None
Other Cache:	None
Memory:	4GB
Disk Subsystem:	36GB SCSI
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1B (Rev. 2650) +IPK
Compiler:	Compaq C V6.5-011-48C5K Spike V5.2 (506A) Compaq Fortran V5.5-2602-48C8L Compaq Fortran 77 V5.5-2602-48C8L KAP Fortran V4.3 k3105171 000607 KAP Fortran 77 V4.1 k310440 980926 KAP C V4.1 k010726 000607
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Baseline   C: cc  -arch ev7 -fast -O4 ONESTEP
     Fortran: f90 -arch ev7 -fast -O5 ONESTEP


Peak:
  All use -arch ev7 -non_shared ONESTEP
  except these (which use only the tunings shown below):
       173.applu 188.ammp 191.fma3d

  Individual benchmark tuning:
  168.wupwise: kf77 -call_shared -inline all -tune ev67
               -unroll 12 -automatic -align commons -arch ev67
               -fkapargs=' -aggressive=c -fuse
               -fuselevel=1 -so=2 -r=1 -o=1 -interleave
               -ur=6 -ur2=060 ' +PFB
      171.swim: same as base
     172.mgrid: kf90 -call_shared -arch generic -O5 -inline
```

Hewlett-Packard Company
AlphaServer ES47 7/1000

SPECfp2000 = 1288
SPECfp_base2000 = 975

SPEC license #: 2	Tested by: HP	Test date: Dec-2002	Hardware Avail: Jan-2003	Software Avail: Jan-2003

Notes/Tuning Information (Continued)

```
                manual -nopipeline -transform_loops -unroll 9 -automatic
                -fkapargs='-aggressive=a -fuse -interleave
                -ur=2 -ur3=5 -cachesize=128,16000 ' +PFB
     173.applu: kf90  -O5 -transform_loops
                -fkapargs=' -o=0 -nointerleave -ur=14
                -ur2=260 -ur3=18' +PFB
      177.mesa: kcc -fast -O4 +CFB +IFB
    178.galgel: f90 -O5 -fast -unroll 5 -automatic
       179.art: kcc  -assume whole_program -ldensemalloc
                -call_shared -assume restricted_pointers
                -unroll 16 -inline none -ckapargs='
                -fuse -fuselevel=1 -ur=3' +PFB
    183.equake: cc -call_shared -arch generic -fast -O4
                -ldensemalloc -assume restricted_pointers
                -inline speed -unroll 13 -xtaso_short +PFB
   187.facerec: f90 -O4 -nopipeline -inline all
                -non_shared -speculate all -unroll 7
                -automatic -assume accuracy_sensitive
                -math_library fast +IFB
      188.ammp: cc -arch host -O4 -ifo -assume nomath_errno
                -assume trusted_short_alignment -fp_reorder
                -readonly_strings -ldensemalloc -xtaso_short
                -assume restricted_pointers -unroll 9
                -inline speed +CFB +IFB +PFB
     189.lucas: kf90 -O5 -fkapargs='-ur=1' +PFB
     191.fma3d: kf90 -arch ev6 -non_shared -O4 -transform_loops
                -fkapargs='-cachesize=128,16000 ' +PFB
  200.sixtrack: f90 -fast -O5 -assume accuracy_sensitive
                -notransform_loops +PFB
      301.apsi: kf90 -O5 -inline none -call_shared -speculate all
                -align commons -fkapargs=' -aggressive=ab
                -tune=ev5 -fuse -ur=1 -ur2=60 -ur3=20
                -cachesize=128,16000'

Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use       -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):
```

Notes/Tuning Information (Continued)

```
          mv ${baseexe} oldexe
          spike oldexe -feedback oldexe -o ${baseexe}

+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

           rm -f *Counts*
           mv ${baseexe} oldexe
           pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
           mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

           spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

vm:
        vm_bigpg_enabled = 1
        vm_bigpg_thresh=16
        vm_swap_eager = 0

proc:
        max_per_proc_address_space = 0x40000000000
        max_per_proc_data_size = 0x40000000000
        max_per_proc_stack_size = 0x40000000000
        max_proc_per_user = 2048
        max_threads_per_user = 0
        maxusers = 16384
        per_proc_address_space = 0x40000000000
        per_proc_data_size = 0x40000000000
        per_proc_stack_size = 0x40000000000


Portability: galgel: -fixed

Information on UNIX V5.1B Patches can be found at
http://ftp1.service.digital.com/public/unix/v5.1b/

In the ES47, there are two cpus per shelf.  Each cpu has
its own 4GB of memory.  Neither of the cpus can be
physically removed.  For 1 cpu results measured on a 2 cpu
system, one cpu was turned off at boot time using the
/etc/sysconfigtab setting "cpu_enabled_mask=0".  The cpu's
4GB of memory was also physically removed.
```