CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
AlphaServer ES80 7/1000

SPECfp_rate2000 = 14.9

SPECfp_rate_base2000 = 11.3

SPEC license #: 2 | Tested by: HP | Test date: Dec-2002 | Hardware Avail: Jan-2003 | Software Avail: Jan-2003

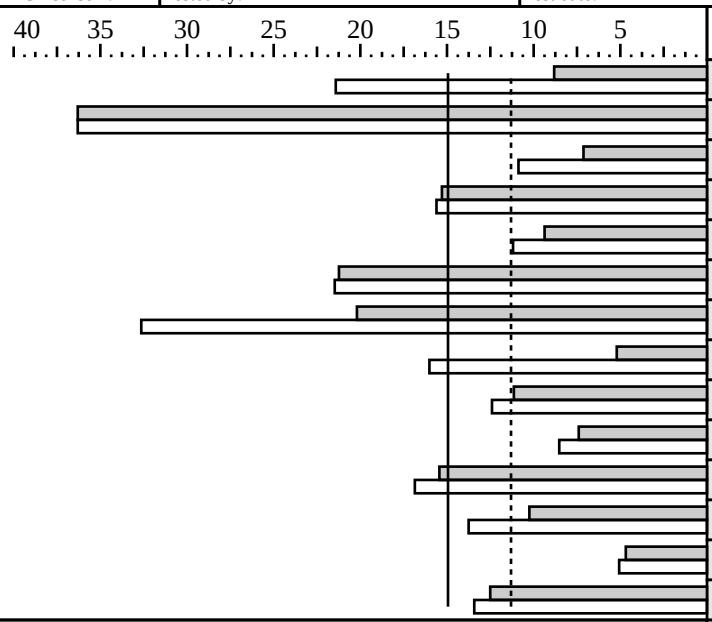

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	210	8.82	1	86.7	21.4
171.swim	1	99.1	36.3	1	99.1	36.3
172.mgrid	1	293	7.13	1	192	10.9
173.applu	1	159	15.3	1	156	15.6
177.mesa	1	173	9.37	1	145	11.2
178.galgel	1	158	21.2	1	157	21.5
179.art	1	149	20.2	1	92.4	32.6
183.equake	1	290	5.21	1	94.2	16.0
187.facerec	1	198	11.1	1	178	12.4
188.ammp	1	345	7.40	1	299	8.52
189.lucas	1	150	15.4	1	138	16.9
191.fma3d	1	238	10.2	1	177	13.8
200.sixtrack	1	272	4.68	1	252	5.07
301.apsi	1	241	12.5	1	225	13.4

Hardware

CPU:	Alpha 21364
CPU MHz:	1000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	2 to 8
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	1.75MB on chip per CPU
L3 Cache:	None
Other Cache:	None
Memory:	4GB
Disk Subsystem:	36GB SCSI
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1B (Rev. 2650) +IPK
Compiler:	Compaq C V6.5-011-48C5K Spike V5.2 (506A) Compaq Fortran V5.5-2602-48C8L Compaq Fortran 77 V5.5-2602-48C8L KAP Fortran V4.3 k3105171 000607 KAP Fortran 77 V4.1 k310440 980926 KAP C V4.1 k010726 000607
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Baseline   C: cc  -arch ev7 -fast -O4 ONESTEP
     Fortran: f90 -arch ev7 -fast -O5 ONESTEP


Peak:
  All use -arch ev7 -non_shared ONESTEP
  except these (which use only the tunings shown below):
       173.applu 188.ammp 191.fma3d
  Individual benchmark tuning:
  168.wupwise: kf77 -call_shared -inline all -tune ev67
               -unroll 12 -automatic -align commons -arch ev67
               -fkapargs=' -aggressive=c -fuse
               -fuselevel=1 -so=2 -r=1 -o=1 -interleave
               -ur=6 -ur2=060 ' +PFB
     171.swim: same as base
    172.mgrid: kf90 -call_shared -arch generic -O5 -inline
               manual -nopipeline -transform_loops -unroll 9 -automatic
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                  -fkapargs='-aggressive=a -fuse -interleave
                  -ur=2 -ur3=5 -cachesize=128,16000 ' +PFB
     173.applu: kf90  -O5 -transform_loops
                -fkapargs=' -o=0 -nointerleave -ur=14
                -ur2=260 -ur3=18' +PFB
      177.mesa: kcc -fast -O4 +CFB +IFB
    178.galgel: f90 -O5 -fast -unroll 5 -automatic
       179.art: kcc  -assume whole_program -ldensemalloc
                -call_shared -assume restricted_pointers
                -unroll 16 -inline none -ckapargs='
                -fuse -fuselevel=1 -ur=3' +PFB
    183.equake: cc -call_shared -arch generic -fast -O4
                -ldensemalloc -assume restricted_pointers
                -inline speed -unroll 13 -xtaso_short +PFB
   187.facerec: f90 -O4 -nopipeline -inline all
                -non_shared -speculate all -unroll 7
                -automatic -assume accuracy_sensitive
                -math_library fast +IFB
      188.ammp: cc -arch host -O4 -ifo -assume nomath_errno
                -assume trusted_short_alignment -fp_reorder
                -readonly_strings -ldensemalloc -xtaso_short
                -assume restricted_pointers -unroll 9
                -inline speed +CFB +IFB +PFB
     189.lucas: kf90 -O5 -fkapargs='-ur=1' +PFB
     191.fma3d: kf90 -arch ev6 -non_shared -O4 -transform_loops
                -fkapargs='-cachesize=128,16000 ' +PFB
  200.sixtrack: f90 -fast -O5 -assume accuracy_sensitive
                -notransform_loops +PFB
      301.apsi: kf90 -O5 -inline none -call_shared -speculate all
                -align commons -fkapargs=' -aggressive=ab
                -tune=ev5 -fuse -ur=1 -ur2=60 -ur3=20
                -cachesize=128,16000'

Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use       -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):

           mv ${baseexe} oldexe
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
            spike oldexe -feedback oldexe -o ${baseexe}

+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

            rm -f *Counts*
            mv ${baseexe} oldexe
            pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
            mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

            spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

vm:
        vm_bigpg_enabled = 1
        vm_bigpg_thresh=16
        vm_swap_eager = 0

proc:
        max_per_proc_address_space = 0x40000000000
        max_per_proc_data_size = 0x40000000000
        max_per_proc_stack_size = 0x40000000000
        max_proc_per_user = 2048
        max_threads_per_user = 0
        maxusers = 16384
        per_proc_address_space = 0x40000000000
        per_proc_data_size = 0x40000000000
        per_proc_stack_size = 0x40000000000


Portability: galgel: -fixed

Information on UNIX V5.1B Patches can be found at
http://ftp1.service.digital.com/public/unix/v5.1b/

In the ES80, there are two cpus per shelf.  Each cpu has
its own 4GB of memory.  Neither of the cpus can be
physically removed.  For 1 cpu results measured on a 2 cpu
system, one cpu was turned off at boot time using the
/etc/sysconfigtab setting "cpu_enabled_mask=0".  The cpu's
4GB of memory was also physically removed.
```