CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade 2000 (1.2GHz)

SPECint2000 = 722

SPECint_base2000 = 642

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Mar-2003 | Hardware Avail: Apr-2003 | Software Avail: May-2003

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	293	477	238	587
175.vpr	1400	254	551	236	593
176.gcc	1100	162	681	151	726
181.mcf	1800	263	683	213	847
186.crafty	1000	150	665	128	778
197.parser	1800	315	571	272	663
252.eon	1300	169	770	162	803
253.perlbmk	1800	282	639	257	700
254.gap	1100	236	465	205	537
255.vortex	1900	191	997	168	1131
256.bzip2	1500	215	697	200	751
300.twolf	3000	456	658	422	711

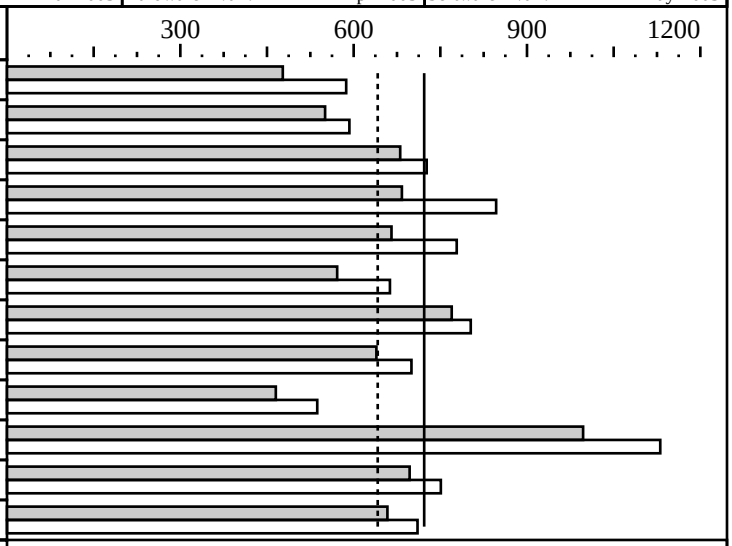

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-2
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	2GB 4-way interleaved
Disk Subsystem:	1 x 73GB 10K RPM FC-AL Disk, Sun Option X6805A
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/09) Sun Performance Library 8 (pre-FCS build 3/09)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Integer base flags:
     -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
 ONESTEP=yes and feedback for all benchmarks

 164.gzip:    -xO4  -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100
 175.vpr:     -fast -xalias_level=std -xipo=2
              -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100 -lmopt -lm
 176.gcc:     -fast -xipo=2 -ll2amm
 181.mcf:     -fast -xipo=2 -xprefetch_level=3 -Wc,-Qeps:enabled=1
 186.crafty:  -fast -xinline= -xipo=2 -xalias_level=strong -W2,-Ashort_ldst
              Feedback adds -xlinkopt in PASS2
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 197.parser:  -fast -xipo=2 -xalias_level=strong
              -Wc,-Qgsched-T6,-Qipa:valueprediction
 252.eon:     -fast -xipo=2 -xalias_level=compatible -noex
              -Qoption cg -Qeps:enabled=1,-Qeps:ws=32
 253.perlbmk: -xO5 -xtarget=native -xipo -xalias_level=std -xsafe=mem
              -Wc,-Qeps:enabled=1,-Qeps:ws=8,-Qiselect-sw_pf_tbl_th=20,
              -Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap:     -fast -xipo=2 -xalias_level=strong -xvector
              -xprefetch_level=3 -W2,-Abcopy
 255.vortex:  -fast -xrestrict -xipo=2
              -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
              -Wc,-Qeps:enabled=1,-Qdepgraph-early_cross_call=1,
              -Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm
 256.bzip2:   -fast -xipo -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1
 300.twolf:   -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 176.gcc:     -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty:  -DSUN
 252.eon:     -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap:     -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
   autoup=900
   tune_t_fsflushr=1

System Settings:
    2nd cpu physically removed from system
```