CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Altix 3000 (1300MHz, Itanium 2)

SPECint2000 = 875

SPECint_base2000 = 875

SPEC license #: 4 | Tested by: SGI | Test date: Jun-2003 | Hardware Avail: Jun-2003 | Software Avail: Jun-2003

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	177	790	177	790
175.vpr	1400	167	836	167	836
176.gcc	1100	106	1039	106	1039
181.mcf	1800	254	710	254	710
186.crafty	1000	110	907	110	907
197.parser	1800	293	615	293	615
252.eon	1300	120	1087	120	1087
253.perlbmk	1800	202	889	202	889
254.gap	1100	158	695	158	695
255.vortex	1900	150	1263	150	1263
256.bzip2	1500	175	855	175	855
300.twolf	3000	292	1027	292	1027

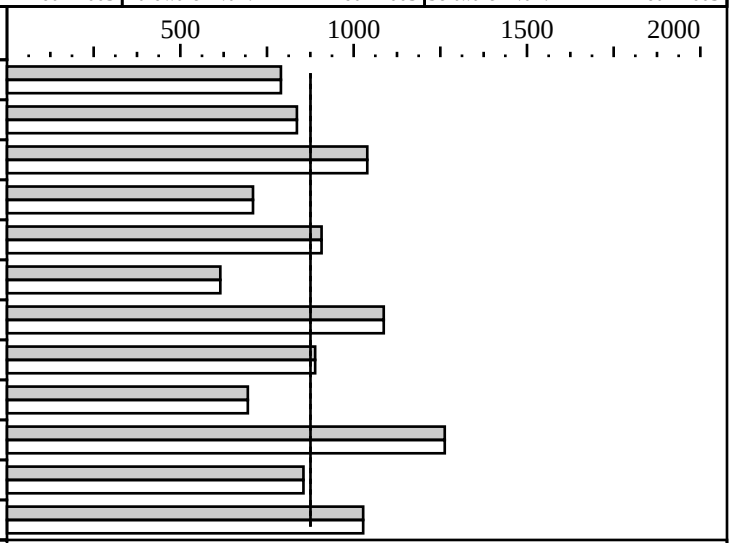

Hardware

CPU:	Intel Itanium 2
CPU MHz:	1300
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	4-64
Parallel:	No
Primary Cache:	16KBI + 16KBD (on chip) per CPU
Secondary Cache:	256KB (on chip) per CPU
L3 Cache:	3.0MB (on chip) per CPU
Other Cache:	N/A
Memory:	4 GB
Disk Subsystem:	1 x 36 GB SCSI (Seagate Cheetah 15k rpm)
Other Hardware:	None

Software

Operating System:	SGI ProPack(TM) v2.2
Compiler:	Intel(R) C++ Compiler for Linux 7.1 (Build 20030507)
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
+FDO: PASS1=-prof_gen  PASS2=-prof_use

Baseline optimization flags:
  C programs:       -ipo -O3 +FDO
  C++ programs:     -ipo -O2 +FDO -ansi_alias

Portability Flags:
  176.gcc: -DSPEC_CPU2000_LP64 -Dalloca=_builtin_alloca -D_LIBC
  186.crafty: -DLINUX_i386
  252.eon: -DSPEC_CPU2000_LP64 -DHAS_ERRLIST
  253.perlbmk: -DSPEC_CPU2000_LP64 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_LINUX_IA64 -DSPEC_CPU2000_GLIBC22
  254.gap: -DSPEC_CPU2000_LP64 -DSYS_HAS_CALLOC_PROTO -DSYS_IS_USG
           -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
  255.vortex: -DSPEC_CPU2000_LP64

Processes were bound to CPUs using dplace.

Peak flags same as baseline (basepeak=true set globally).
```