CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity Server rx2600 (1500 MHz, Itanium 2)

SPECint_rate2000 = 15.3

SPECint_rate_base2000 = 15.3

SPEC license #: 3 | Tested by: HP Richardson | Test date: Jul-2003 | Hardware Avail: Sep-2003 | Software Avail: Sep-2003

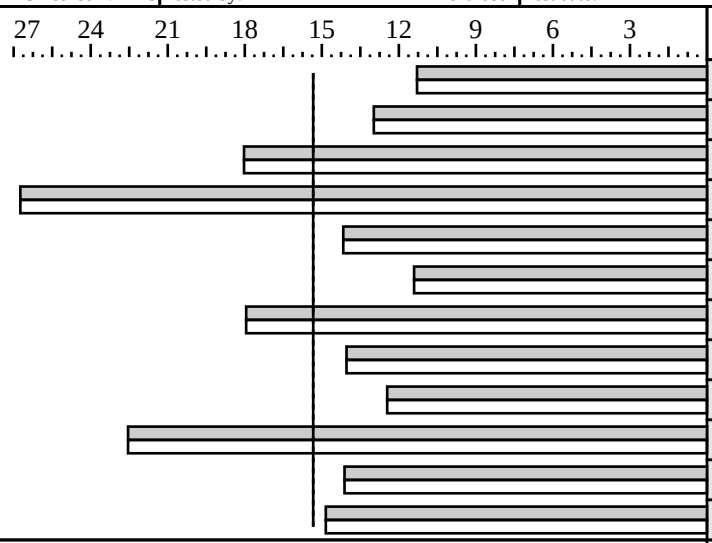

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	144	11.3	1	144	11.3
175.vpr	1	125	13.0	1	125	13.0
176.gcc	1	70.8	18.0	1	70.8	18.0
181.mcf	1	78.1	26.7	1	78.1	26.7
186.crafty	1	81.9	14.2	1	81.9	14.2
197.parser	1	183	11.4	1	183	11.4
252.eon	1	84.0	17.9	1	84.0	17.9
253.perlbmk	1	149	14.0	1	149	14.0
254.gap	1	102	12.5	1	102	12.5
255.vortex	1	97.8	22.5	1	97.8	22.5
256.bzip2	1	123	14.1	1	123	14.1
300.twolf	1	234	14.8	1	234	14.8

Hardware

CPU:	Intel Itanium 2
CPU MHz:	1500
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-2
Parallel:	no
Primary Cache:	16KBI + 16KBD (on chip) per CPU
Secondary Cache:	256KB (on chip) per CPU
L3 Cache:	6.0MB (on chip) per CPU
Other Cache:	N/A
Memory:	12GB (12 * 1GB DIMMs)
Disk Subsystem:	1x36GB 10k RPM SCSI disk
Other Hardware:	N/A

Software

Operating System:	HPUX11i-TCOE B.11.23
Compiler:	HP C/ANSI C Compiler B.11.23
	HP aC++ Compiler B.11.23
File System:	vxfs
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags
176.gcc     : -DHOST_WORDS_BIG_ENDIAN
181.mcf     : -DWANT_STDC_PROTO
186.crafty  : -DHP
252.eon     : -I. -DFMAX_IS_DOUBLE -DNDEBUG
              -DSPEC_CPU2000_LP64 (because of 64-bit compile)
253.perlbmk : -DSPEC_CPU2000_HP
254.gap     : -DSPEC_CPU2000_HP -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO
              -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Base Flags
  all       : +Oprofile=collect:all/+Oprofile=use
  C         : +Ofaster -exec +Odatalayout
  C++       : +Ofaster +inline_level 2 -minshared +DD64

Peak Flags
  same as baseline (basepeak=true set globally)


Kernel Tunables:
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    maxdsiz             0x7b03a000
    maxdsiz_64bit    0x04000000000
    maxssiz             0x10000000
    maxssiz_64bit       0x40000000
    vps_ceiling              16384
    vps_pagesize              4096
    swapmem_on                   0
    dbc_max_pct                 20
    dbc_min_pct                 20

  Note:
    EFI shell utility 'cpuconfig' used
    to deconfigure processors if necessary
```