CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
AlphaServer DS15/1000

SPECint2000 = 631

SPECint_base2000 = 572

SPEC license #: 2 | Tested by: HP | Test date: Jun-2004 | Hardware Avail: Jul-2004 | Software Avail: Jul-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	306	458	304	460
175.vpr	1400	260	538	256	547
176.gcc	1100	184	597	162	678
181.mcf	1800	460	391	292	617
186.crafty	1000	128	782	128	782
197.parser	1800	479	376	363	495
252.eon	1300	160	813	162	805
253.perlbmk	1800	297	606	280	642
254.gap	1100	239	461	208	528
255.vortex	1900	231	823	209	909
256.bzip2	1500	238	629	232	646
300.twolf	3000	490	612	495	606

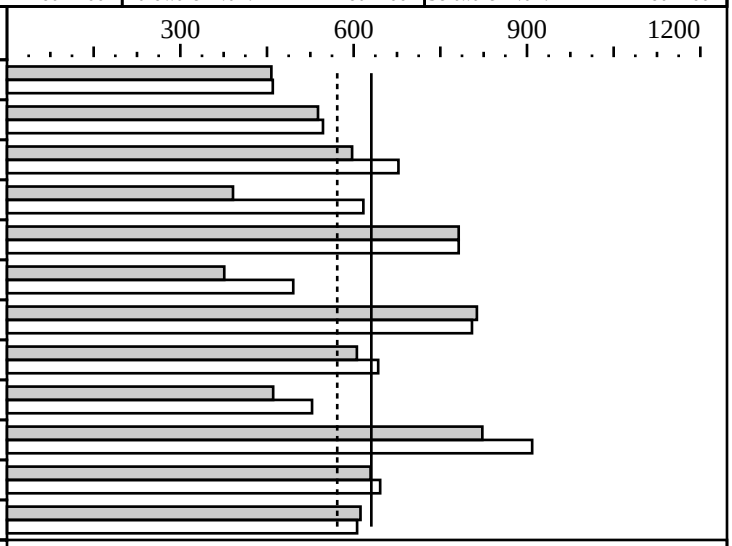

Hardware

CPU:	Alpha 21264C
CPU MHz:	1000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	2MB
L3 Cache:	None
Other Cache:	None
Memory:	2GB; 512MB RIMMs
Disk Subsystem:	36GB Ultra 160 10KRPM
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1B (Rev. 2650) +IPK
Compiler:	Compaq C V6.5-011-48C5K Program Analysis Tools V2.0 Spike V5.2 (510 USG) Compaq C++ V6.5-041
File System:	UFS
System State:	Multi-user

Notes/Tuning Information

```
Baseline C  : cc  -arch ev7 -fast +CFB ONESTEP
         C++: cxx -arch ev7 -O2        ONESTEP

Peak:
  All but 252.eon: cc -g3 -arch ev7 ONESTEP
     164.gzip: -fast -O4 -non_shared +CFB
      175.vpr: -fast -O4 -assume restricted_pointers +CFB
      176.gcc: -fast -O4 -xtaso_short -all -ldensemalloc -none
               +CFB +IFB
      181.mcf: -fast -xtaso_short +CFB +IFB +PFB
   186.crafty: same as base
   197.parser: -fast -O4 -xtaso_short -non_shared +CFB
      252.eon: cxx -arch ev7 -O2 -all -ldensemalloc -none
  253.perlbmk: -fast -non_shared +CFB +IFB
      254.gap: -fast -O4 -non_shared +CFB +IFB +PFB
   255.vortex: -fast -non_shared +CFB +IFB
    256.bzip2: -fast -O4 -non_shared +CFB
    300.twolf: -fast -O4
               -ldensemalloc -non_shared +CFB +IFB
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use_feedback -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):

           mv ${baseexe} oldexe
           spike oldexe -feedback oldexe -o ${baseexe}

+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

           rm -f *Counts*
           mv ${baseexe} oldexe
           pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
           mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

           spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

vm:
        vm_bigpg_enabled = 1
        vm_bigpg_thresh = 6
        vm_swap_eager = 0
        ubc_maxpercent = 50

proc:
        max_per_proc_address_space = 34359738368
        max_per_proc_data_size = 34359738368
        max_per_proc_stack_size = 34359738368
        max_proc_per_user = 2048
        max_threads_per_user = 4096
        maxusers = 2048
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
        per_proc_address_space = 34359738368
        per_proc_data_size = 34359738368
        per_proc_stack_size = 34359738368


Portability: gcc: -Dalloca=__builtin_alloca; crafty: -DALPHA
perlbmk: -DSPEC_CPU2000_DUNIX; vortex: -DSPEC_CPU2000_LP64
gap: -DSYS_HAS_CALLOC_PROTO -DSYS_IS_BSD -DSYS_HAS_IOCTL_PROTO
     -DSPEC_CPU2000_LP64

Information on UNIX V5.1B Patches can be found at
http://ftp1.service.digital.com/public/unix/v5.1b/

Processes were bound to CPUs using "runon".
```