CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V890 (8 processor)

SPECfp_rate2000 = 151

SPECfp_rate_base2000 = 130

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Aug-2004 | Hardware Avail: Sep-2004 | Software Avail: Sep-2004

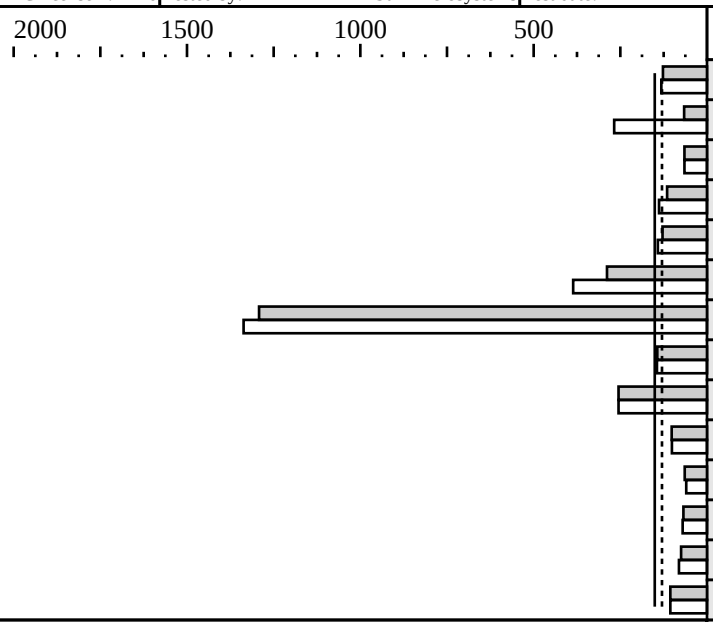

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	16	234	127	16	225	132
171.swim	16	872	66.0	16	215	268
172.mgrid	16	513	65.1	16	514	65.1
173.applu	16	339	115	16	282	138
177.mesa	16	203	128	16	183	142
178.galgel	16	187	288	16	139	386
179.art	16	37.3	1292	16	36.1	1337
183.equake	16	168	143	16	167	144
187.facerec	16	138	255	16	138	255
188.ammp	16	401	102	16	403	101
189.lucas	16	578	64.3	16	620	59.9
191.fma3d	16	573	68.0	16	555	70.2
200.sixtrack	16	273	74.7	16	252	80.9
301.apsi	16	456	106	16	456	106

Hardware

CPU:	UltraSPARC IV
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	16 cores, 8 chips, 2 cores/chips
CPU(s) orderable:	4,8 (order by # of chips)
Parallel:	No
Primary Cache:	32KBI+64KBD per core on chip (64KBI+128KBD on chip)
Secondary Cache:	8MB(I+D) per core off chip (16MB(I+D) off chip)
L3 Cache:	None
Other Cache:	None
Memory:	32GB 8-way interleaved
Disk Subsystem:	1 x 73GB
Other Hardware:	None

Software

Operating System:	Solaris 9 9/04
Compiler:	Sun Studio 9
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
 ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

 168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
 171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
              -Qoption iropt -Atile:skewp,-Ainline:cs=700
              (no feedback)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 172.mgrid:   -fast -xipo=2
 173.applu:   -fast -xipo=2
              -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
              -Qoption iropt -Aujam:inner=g
 177.mesa:    -fast -xipo=2 -xalias_level=strong -xrestrict
              -Wc,-Qms_pipe+unoovf
 178.galgel:  -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
              RM_SOURCES=lapak.f90
 179.art:     -fast -xipo=2 -xalias_level=std
              -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
 183.equake:  -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
 187.facerec: basepeak=yes
 188.ammp:    -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm
 189.lucas:   -fast -xipo=2 -xprefetch_level=3
              -Qoption iropt -Apf:pdl=1
              -Qoption f90comp -array_pad_rows,1977
 191.fma3d:   -fast -xipo=2 -stackvar -xprefetch_level=3
              -Qoption iropt -Apf:pdl=1
 200.sixtrack:-xO4 -dalign -xchip=ultra3 -xarch=v8plusb
              -fsimple=2 -xprefetch=no
 301.apsi:    -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=512K
  MPSSSTACK=512K
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1
```