CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D925XECV2 motherboard(2.8E GHz, Intel Pentium 4 processor 520)

SPECint2000 = 1290

SPECint_base2000 = 1286

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Oct-2004 | Hardware Avail: Nov-2004 | Software Avail: Sep-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	148	945	149	938
175.vpr	1400	162	862	160	877
176.gcc	1100	70.3	1564	70.3	1564
181.mcf	1800	136	1325	136	1325
186.crafty	1000	95.8	1044	96.1	1040
197.parser	1800	162	1113	161	1118
252.eon	1300	79.7	1632	78.5	1655
253.perlbmk	1800	121	1491	121	1490
254.gap	1100	72.5	1517	72.5	1517
255.vortex	1900	83.7	2271	83.7	2271
256.bzip2	1500	160	937	159	942
300.twolf	3000	225	1333	225	1334

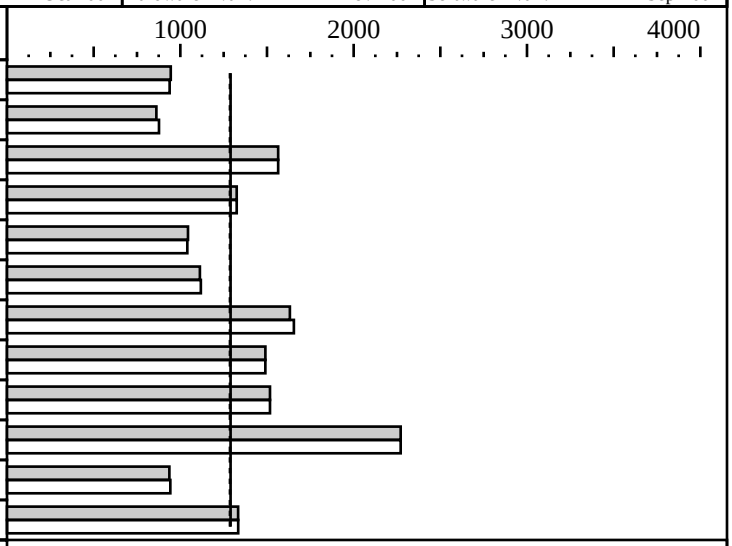

Hardware

CPU:	Intel Pentium 4 processor 520 (2.8E GHz, 800 MHz bus)
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip with HT Technology enabled
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip
Secondary Cache:	1MB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	1 GB (2x512MB PC2-4300 DDRII 533 CL4-4-4)
Disk Subsystem:	Seagate ST3160023AS 160 GB Serial ATA (7200 RPM, 8MB cache)
Other Hardware:	N/A

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ Compiler 8.1 Build 20040802Z Microsoft Visual Studio .Net 2002(for libraries) SmartHeap Library Version 6.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

256.bzip2: -fast -Oa -Qunroll1 +FDO
300.twolf: -fast -O3 +FDO shlW32M.lib
Tested systems can be used with Shin-G ATX case, Antec power supply NeoPower 480
Product description located as of Nov-2004:
http://www.intel.com/design/motherbd/cv2/index.htm?iid=ipp_browse+motherbd_d925xecv2&
Motherboard is available through Intel Reseller Channel:
http://www.intel.com/cd/channel/reseller/asmo-na/eng/products/box_desktop_boards/intel_boards/p4_boards/p4_dsk_board_D925XECV2/index.htm
The system bus runs at 800 MHz
shlW32M.lib is the SmartHeap library V6.0 from http://www.microquill.com/smartheap/index.html
A PCIe-16 video card is installed and HT Technology is enabled
Memory DIMMs used: Micron MT16HTF6464AG-53EB2