CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

AMD Opteron LS20 for IBM eServer Blade Center (AMD Opteron (TM) 246)

SPECint2000 = 1323

SPECint_base2000 = 1184

SPEC license #: 11 | Tested by: IBM, Inc. | Test date: Apr-2005 | Hardware Avail: Apr-2005 | Software Avail: Apr-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	120	1167	120	1167
175.vpr	1400	151	927	147	949
176.gcc	1100	80.5	1366	79.5	1384
181.mcf	1800	321	560	203	885
186.crafty	1000	60.1	1665	57.5	1740
197.parser	1800	216	833	169	1067
252.eon	1300	71.1	1829	64.2	2024
253.perlbmk	1800	139	1297	123	1461
254.gap	1100	90.1	1220	87.0	1265
255.vortex	1900	104	1820	94.6	2007
256.bzip2	1500	137	1094	137	1094
300.twolf	3000	260	1152	215	1395

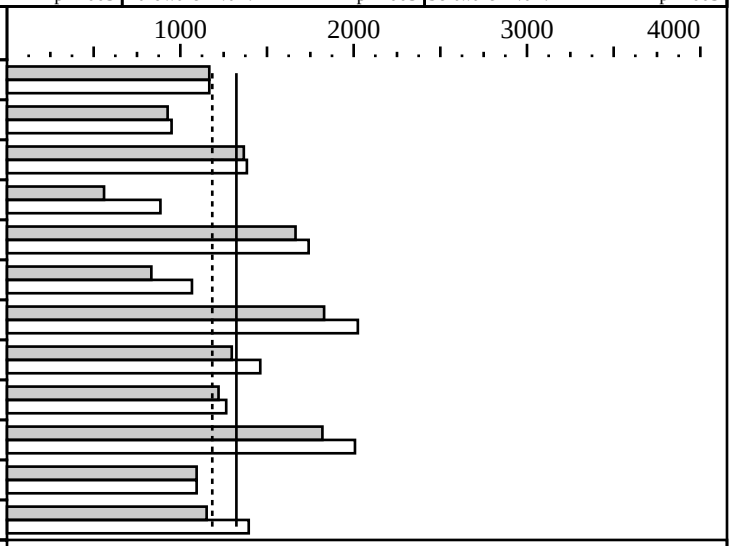

Hardware

CPU:	AMD Opteron 246
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 x 2048MB, DDR400
Disk Subsystem:	SCSI, 36GB 10K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SLES 64 bit Kernel 2.6.5-7.151-smp (SP1)
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.1
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM, Inc.

 +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata

 Baseline optimization flags:
   C programs:       -Ofast +FDO
   C++ programs:     -Ofast +FDO

 Portability Flags:
   176.gcc:      srcalt 64bitgcc
   186.crafty:  -DLINUX_i386
   252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64 srcalt fmax_errno
   253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
                -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
   254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
                -DSYS_HAS_SIGNAL_PROTO  -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
                -DSPEC_CPU2000_LP64
   255.vortex:  -DSPEC_CPU2000_LP64 srcalt closed_files

 Peak Tuning:
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
164.gzip: basepeak = true
175.vpr: -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000
         -INLINE:aggressive=on -IPA:plimit=10000:callee_limit=5000
         +FDO
176.gcc: -O3 -ipa -OPT:goto=off +FDO
181.mcf: -O3 -ipa -IPA:field_reorder=on -m32 +FDO
186.crafty:  -O3 -OPT:goto=off +FDO
197.parser: -O3 -ipa -m32 -IPA:ctype=on +FDO
252.eon: -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -OPT:treeheight=on
         -TENV:X=4:frame_pointer=off -fno-exceptions
         -LNO:fu=10:full_unroll_outer=on -IPA:plimit=4000 +FDO
253.perlbmk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
             -fno-math-errno -IPA:plimit=10000 +FDO
254.gap:     -Ofast -WOPT:aggstr=off +FDO
255.vortex: -Ofast -OPT:goto=off -IPA:plimit=1800 -CG:p2align=on
            +FDO
256.bzip2: basepeak = true
300.twolf: -O2 -CG:gcm=off:p2align_freq=100000
           -OPT:Ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
           -WOPT:mem_opnds=on -m32 +FDO
```