CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL35p (AMD Opteron (TM) 275)

SPECint2000 = 1496

SPECint_base2000 = 1457

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2005 | Hardware Avail: Jun-2005 | Software Avail: Jun-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	116	1211	116	1211
175.vpr	1400	117	1197	113	1238
176.gcc	1100	67.8	1622	67.3	1635
181.mcf	1800	179	1007	149	1209
186.crafty	1000	69.9	1431	63.3	1579
197.parser	1800	131	1376	131	1377
252.eon	1300	59.8	2174	54.9	2370
253.perlbmk	1800	122	1475	122	1475
254.gap	1100	71.2	1545	93.8	1173
255.vortex	1900	83.7	2271	84.2	2256
256.bzip2	1500	128	1174	126	1190
300.twolf	3000	202	1482	170	1768

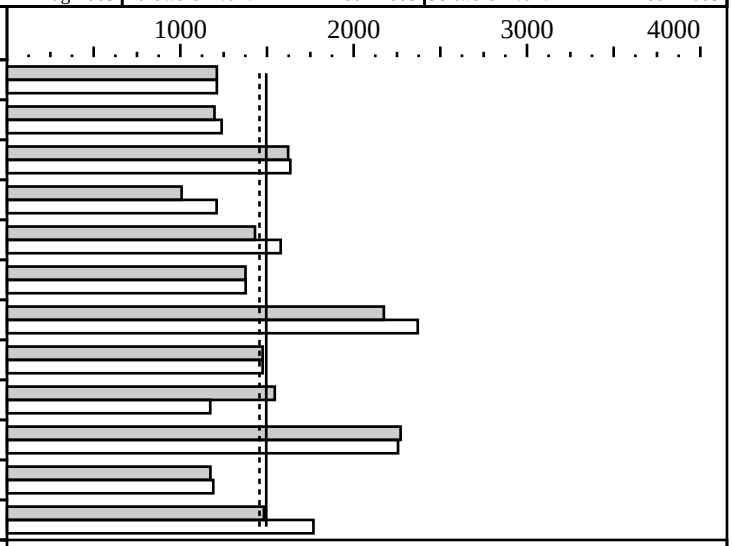

Hardware

CPU:	AMD Opteron (TM) 275
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x2048MB PC3200 CL3.0
Disk Subsystem:	1x60GB ATA100 5400RPM
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 8.0 Build 20040318Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -GX -GR +FDO ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafy: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:       basepeak=yes
  175.vpr:        -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000
                  -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  176.gcc:        -fast -arch:SSE2 -Oi- -Qunroll3 +FDO
  181.mcf:        -fast -QaxN +FDO ONESTEP=yes
  186.crafty:     -fast -arch:SSE2 +FDO ONESTEP=yes
  197.parser:     -arch:SSE2 -Oi- -Qipo +FDO ONESTEP=yes
  252.eon:        -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000
                  -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  253.perlbmk:    basepeak=yes
  254.gap:        basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    255.vortex:     -fast -arch:SSE -Oi- -Qoption,c,-ip_ninl_max_stats=2000
                   -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO shlw32M.lib ONESTEP=yes
    256.bzip2:      -fast -Qunroll2
    300.twolf:      -fast -arch:SSE2 -Qansi_alias +FDO shlw32M.lib ONESTEP=yes
  BIOS Configuration Notes
    Node Interleaving Disabled
  Other Configuration Notes
    /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```