CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Dell

PowerEdge 1950 (Intel Xeon processor 5050, 3.00GHz)

SPECint_rate2000 = 67.1

SPECint_rate_base2000 = 67.0

SPEC license #: 55 | Tested by: Dell, Round Rock, TX | Test date: May-2006 | Hardware Avail: Jun-2006 | Software Avail: May-2006

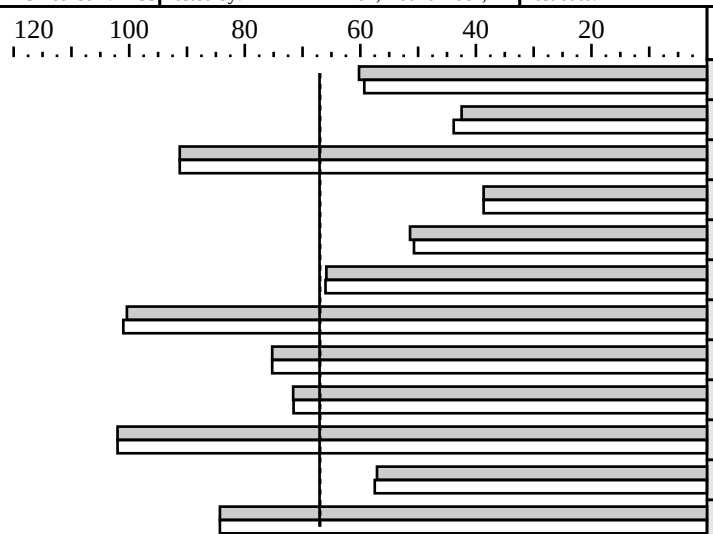

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	216	60.2	8	219	59.3
175.vpr	8	306	42.5	8	296	43.8
176.gcc	8	112	91.3	8	112	91.3
181.mcf	8	432	38.7	8	432	38.7
186.crafty	8	181	51.4	8	183	50.7
197.parser	8	254	65.9	8	253	66.0
252.eon	8	120	100	8	119	101
253.perlbmk	8	222	75.3	8	222	75.3
254.gap	8	143	71.6	8	143	71.6
255.vortex	8	173	102	8	173	102
256.bzip2	8	244	57.1	8	242	57.5
300.twolf	8	330	84.3	8	330	84.3

Hardware

CPU:	Intel Xeon processor 5050 (667MHz system bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12K(I) micro-ops + 16KB(D) on chip, per core
Secondary Cache:	2048KB(I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 1GB 533MHz ECC CL4 DDR2 FB-DIMM
Disk Subsystem:	1 x 80GB SATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows Server 2003 Enterprise x64 Edition + SP1 (64-bit)
Compiler:	Intel C++ Compiler 9.1 for IA32(20060323Z) Microsoft Visual Studio .NET 2003(7.1.3088) MicroQuill SmartHeap Library 8.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
  ONESTEP=yes
  +FDO:   PASS1=-Qprof_gen  PASS2=-Qprof_use
PORTABILITY FLAGS
  176.gcc:     -Dalloca=_alloca /F10000000
  186.crafty:  -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
BASE TUNING
  C:           -fast +FDO shlW32M.lib
  C++:         -fast -Qcxx_features +FDO
PEAK TUNING
  164.gzip:    -fast +FDO
  175.vpr:     -fast +FDO
  176.gcc:     basepeak=yes
  181.mcf:     basepeak=yes
  186.crafty:  -fast -Oa +FDO shlW32M.lib
  197.parser:  -fast +FDO
  252.eon:     -fast +FDO
  253.perlbmk: basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    254.gap:      -fast +FDO
    255.vortex    basepeak=yes
    256.bzip2:    -fast -Qunroll1 -Oa +FDO
    300.twolf:    basepeak=yes
  BIOS SETTINGS
    Snoop Filter enabled in BIOS
```