CFP2000 Result

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon 5110 processor, 1.60 GHz

SPECfp_rate2000 = 31.5

SPECfp_rate_base2000 = 31.5

SPEC license #: 22	Tested by: Fujitsu Siemens Computers	Test date: Jul-2006	Hardware Avail: Jul-2006	Software Avail: Jan-2006

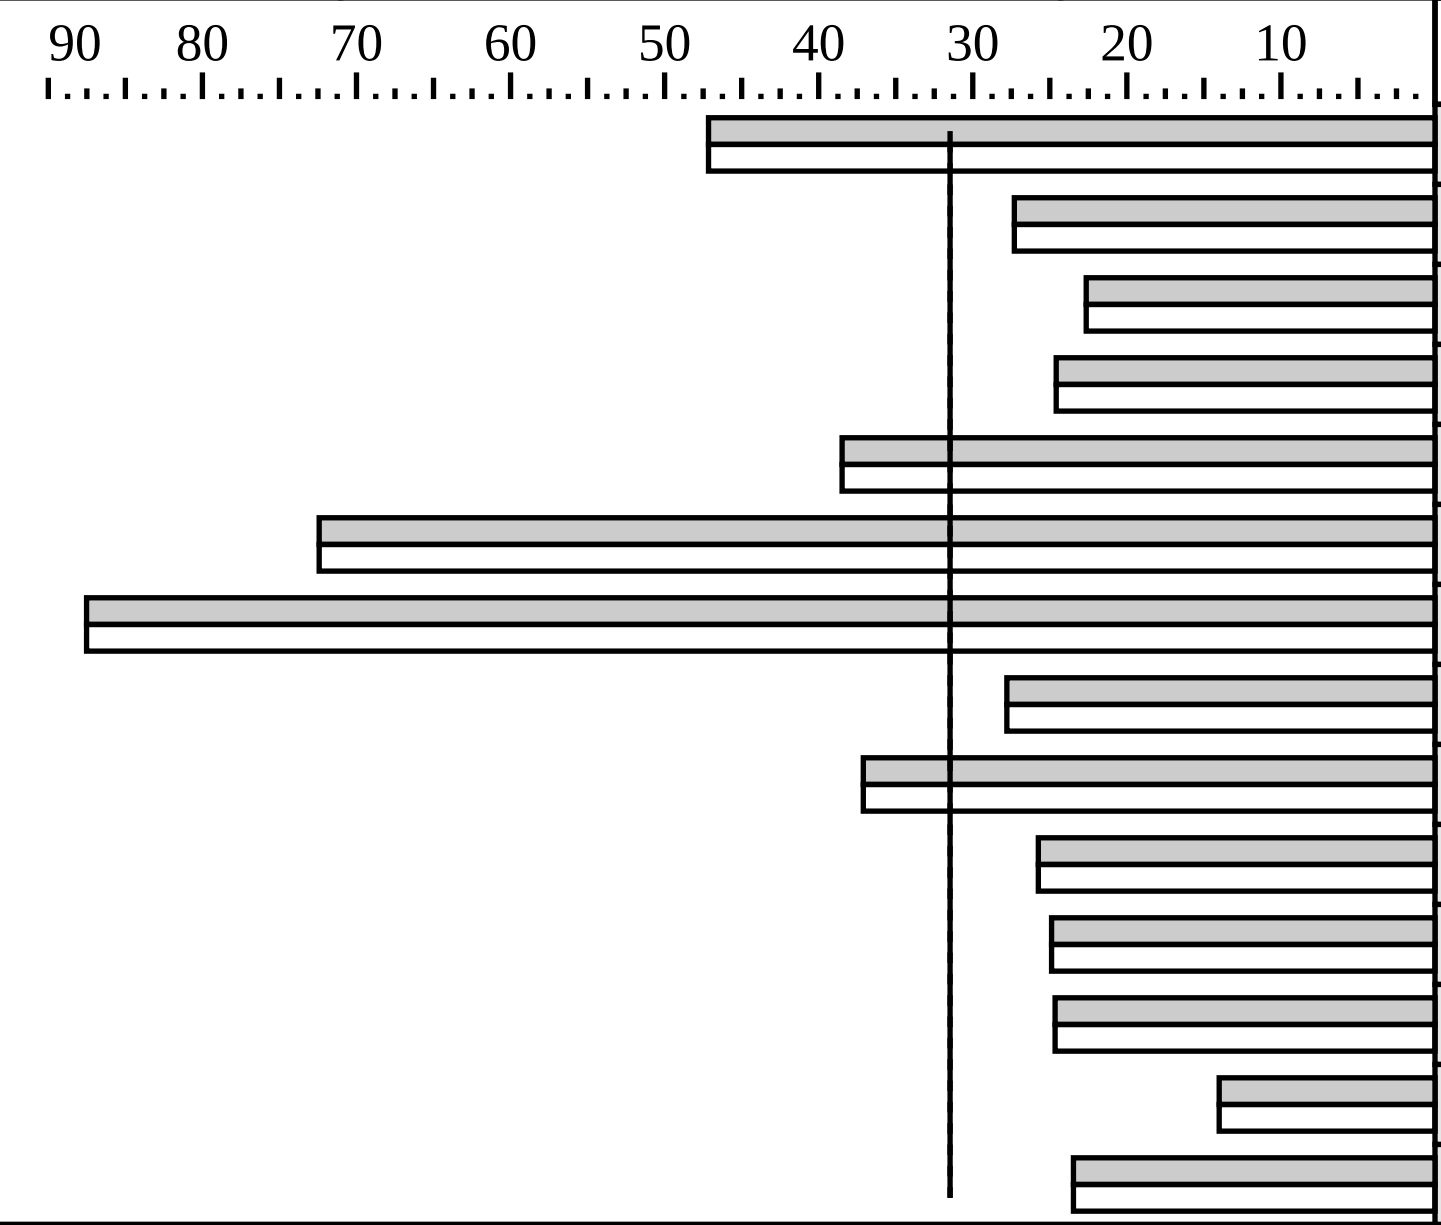

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	78.7	47.2	2	78.7	47.2
171.swim	2	263	27.3	2	263	27.3
172.mgrid	2	184	22.6	2	184	22.6
173.applu	2	198	24.6	2	198	24.6
177.mesa	2	84.4	38.5	2	84.4	38.5
178.galgel	2	92.9	72.4	2	92.9	72.4
179.art	2	68.9	87.5	2	68.9	87.5
183.equake	2	109	27.8	2	109	27.8
187.facerec	2	119	37.1	2	119	37.1
188.ammp	2	198	25.7	2	198	25.7
189.lucas	2	186	24.9	2	186	24.9
191.fma3d	2	198	24.7	2	198	24.7
200.sixtrack	2	182	14.0	2	182	14.0
301.apsi	2	257	23.5	2	257	23.5

Hardware

CPU:	Intel Xeon 5110 processor (1.60 GHz, 4MB SLC, 1066 MHz system bus)
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	4096KB(I+D) on chip, per chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1024 MB DDRII-RAM PC2-4200F (CAS 4-4-4)
Disk Subsystem:	Seagate ST336754SS (SAS, 15.4krpm, 36GB)
Other Hardware:	none

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 9 with SP3 Kernel 2.6.5-7.244-smp on an x86_64
Compiler:	Intel C++ and Fortran Compiler 9.0 for EM64T Build 20060120 (for 64-bit applications)
File System:	ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO implies feedback-directed optimization
PASS1: -prof_gen  PASS2: -prof_use

Optimization flags
ONESTEP=yes set for all benchmarks

Portability flags
-DSPEC_CPU2000_LP64 applied to all benchmarks
178.galgel: -FI for fixed-format Fortran

Base tuning flags
   for Fortran and C programs: -fast +FDO

Peak tuning flags
   same as baseline (basepeak=true set globally)
```

Notes/Tuning Information (Continued)

```
The system bus runs at 1066 MHz

This result was measured with 64-bit binaries using the 64-bit version of
the operating system.

This result was measured on the PRIMERGY TX300 S3. The PRIMERGY TX300 S3 and
the PRIMERGY RX300 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```