CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation
IBM System p5 505 (2100 MHz, 1 CPU)

SPECint2000 = 1704

SPECint_base2000 = 1617

SPEC license #: 11 | Tested by: IBM Austin | Test date: Jun-2006 | Hardware Avail: Aug-2006 | Software Avail: Aug-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	147	950	144	970
175.vpr	1400	98.7	1418	98.7	1418
176.gcc	1100	64.4	1709	64.4	1709
181.mcf	1800	51.6	3486	50.0	3597
186.crafty	1000	76.7	1305	62.8	1593
197.parser	1800	124	1457	122	1480
252.eon	1300	74.1	1755	72.0	1805
253.perlbmk	1800	169	1066	153	1173
254.gap	1100	75.3	1460	73.9	1488
255.vortex	1900	71.0	2675	62.5	3039
256.bzip2	1500	95.8	1565	91.2	1645
300.twolf	3000	164	1830	157	1910

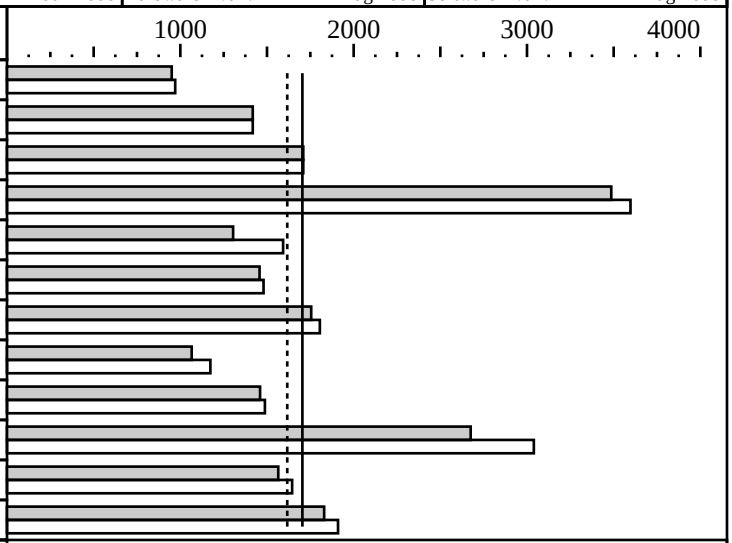

Hardware

CPU:	POWER5+
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip (SMT off)
CPU(s) orderable:	2 core
Parallel:	No
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	1920 KB I+D on chip per chip
L3 Cache:	36 MB I+D off chip per chip, 1 chip per SUT
Other Cache:	None
Memory:	16 GB (8x2 GB)
Disk Subsystem:	1x73GB SCSI, 15K RPM
Other Hardware:	None

Software

Operating System:	AIX 5L V5.3
Compiler:	XL C/C++ Enterprise Edition Version 8.0 for AIX XL Fortran Enterprise Edition Version 10.1 for AIX Other Software: ESSL 4.2.0.4
File System:	AIX/JFS2
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
  176.gcc:      -ma -DHOST_WORDS_BIG_ENDIAN
  186.crafty:   -DAIX
  253.perlbmk:  -DSPEC_CPU2000_AIX
  254.gap:      -DSYS_IS_BSD -DSYS_STRING_H
                -DSYS_HAS_MALLOC_PROTO -DSYS_HAS_CALLOC_PROTO
  300.twolf:    -DHAVE_SIGNED_CHAR

Base Optimization Flags:
  C:    -qpdf1/pdf2
        -O5 -blpdata -D_ILS_MACROS
  C++:  -qpdf1/pdf2
        -O4 -qalign=natural

Peak Optimization Flags
  164.gzip:     -qpdf1/pdf2
                -O4 -qfdpr -blpdata
                fdpr -q -O3
  175.vpr:      basepeak=1
  176.gcc:      basepeak=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  181.mcf:      -qpdf1/pdf2
                -O5 -blpdata -qalign=natural -qhot=arraypad -qfdpr -Q -qmaxmem=-1
                fdpr -q -O3
  186.crafty:   -qpdf1/pdf2
                -O4 -qalign=natural -q64 -lhmu -blpdata
  197.parser:   -qpdf1/pdf2
                -O4 -qfdpr -D_ILS_MACROS -blpdata
                fdpr -q -O3
  252.eon:      -qpdf1/pdf2
                -O4 -qarch=pwr4 -qtune=pwr4 -qalign=natural
  253.perlbmk:  -qpdf1/pdf2
                -O4 -qarch=pwr4 -qtune=pwr4 -qalign=natural -blpdata -lhmu
  254.gap:      -qpdf1/pdf2
                -O4 -qarch=pwr4 -qtune=pwr4 -qalign=natural -blpdata
  255.vortex:   -qpdf1/pdf2
                -O4 -qfdpr -lhmu -blpdata
                fdpr -q -O3
  256.bzip2:    -qpdf1/pdf2
                -O5 -qfdpr -blpdata
                fdpr -q -O3
  300.twolf:    -O5 -qfdpr -blpdata
                fdpr -q -O3


The installed OS level is AIX 5L for POWER Version 5.3 with the 5300-05 Recommended Technology Level.
The installed C/C++ compiler is XL C/C++ Enterprise Edition Version 8.0 for AIX.
The installed Fortran copiler is XL Fortran Enterprise Edition Version 10.1 with the May 2006 AIX PTF.

SMT:  Acronym for "Simultaneous Multi-Threading". A processor technology that allows
      the simultaneous execution of multiple thread contexts within a single processor
      core. (Enabled by default)
SUT:  Acronym for "System Under Test"
PTF:  IBM identifier for "Program Fix Level"

Extended C:     IBM XL C for AIX invoked as cc
ANSI C89:       IBM XL C for AIX invoked as xlc
C++:            IBM XL C for AIX invoked as xlC

ulimits set to unlimited.
Large page mode and memory affinity were set as follows:
    vmo -r -o lgpg_regions=128 -o lgpg_size=16777216
    chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
    bosboot -aD
    shutdown -rF
    export MEMORY_AFFINITY=MCM

The following config-file entry was used to assign each benchmark process to a core:
     submit = bindprocessor $$ $SPECUSERNUM; $command
The "bindprocessor" AIX command binds a process to a CPU core.
One core was deconfigured and SMT disabled using the AIX commands
     smtctl -m off -w boot
     bosboot -aD
     shutdown -rF
     drmgr -r -c cpu

This result was measured on an IBM System p5 510. IBM System p5 505 and IBM System
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

p5 510 (2-core version) are electronically equivalent.