CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation
IBM System p5 550 (2100 MHz, 4 CPU)

SPECfp_rate2000 = 149

SPECfp_rate_base2000 = 139

SPEC license #: 11 | Tested by: IBM Austin | Test date: Jul-2006 | Hardware Avail: Aug-2006 | Software Avail: Aug-2006

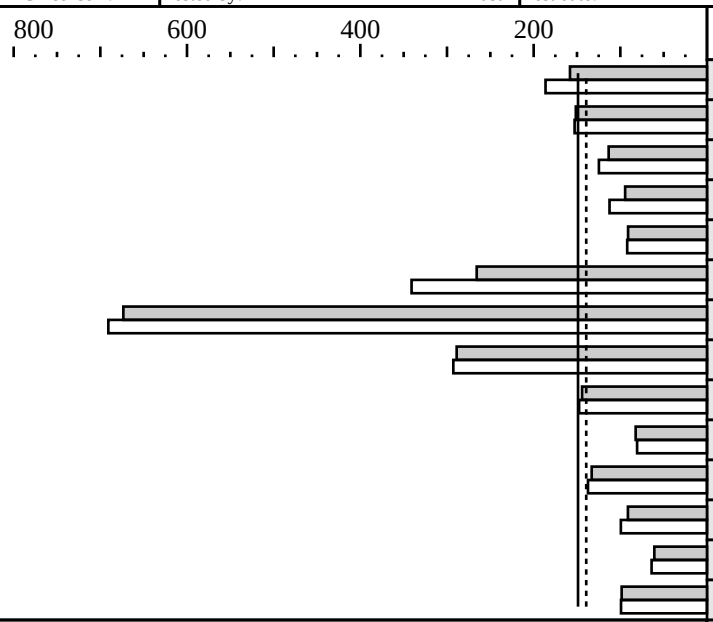

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	8	93.9	158	8	79.7	186
171.swim	8	190	151	8	188	153
172.mgrid	8	147	113	4	67.0	125
173.applu	8	206	94.4	8	173	112
177.mesa	8	143	91.1	8	141	92.1
178.galgel	8	101	266	4	39.5	341
179.art	8	35.8	673	8	34.9	691
183.equake	8	41.8	289	8	41.2	293
187.facerec	8	122	144	8	119	148
188.ammp	8	248	82.3	8	253	80.7
189.lucas	8	139	133	4	67.6	137
191.fma3d	8	214	91.2	8	196	99.4
200.sixtrack	8	168	60.8	8	160	63.9
301.apsi	8	245	98.5	8	243	99.2

Hardware

CPU:	POWER5+
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip (SMT on)
CPU(s) orderable:	2,4 cores
Parallel:	No
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	1920 KB I+D on chip per chip
L3 Cache:	36 MB I+D off chip per chip, 2 chips per SUT
Other Cache:	None
Memory:	32 GB (8x4 GB)
Disk Subsystem:	1x73GB SCSI, 15K RPM
Other Hardware:	None

Software

Operating System:	AIX 5L V5.3
Compiler:	XL C/C++ Enterprise Edition Version 8.0 for AIX XL Fortran Enterprise Edition Version 10.1 for AIX Other Software: ESSL 4.2.0.4
File System:	AIX/JFS2
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
     -qfixed used in:        168.wupwise, 171.swim, 172.mgrid, 173.applu,
                             178.galgel, 200.sixtrack, 301.apsi
     -qsuffix=f=f90 used in: 178.galgel, 187.facerec, 189.lucas, 191.fma3d

Base Optimization Flags:
  Fortran:    -O5 -lhmu -blpdata -lmass
  C:          -qpdf1/pdf2
              -O5 -blpdata -qalign=natural

Peak Optimization Flags
  168.wupwise:  -O5 -qsave -blpdata -lhmu -lmass
  171.swim:     -q64 -O5 -blpdata
  172.mgrid:    users = 4
                -qpdf1/pdf2
                -O4 -qipa=partition=large -q64 -blpdata
  173.applu:    -qpdf1/pdf2
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -O5 -qfdpr -qalign=struct=natural -q64 -blpdata
                fdpr -q -O3
  177.mesa:     -qpdf1/pdf2
                -O5 -qalign=natural
  178.galgel:   users = 4
                -qpdf1/pdf2
                -O4 -qfdpr -lhmu -blpdata -lmass -qessl -lessl
                fdpr -q -O3
  179.art:      -O5 -lhmu -blpdata
  183.equake:   -qpdf1/pdf2
                -O3 -qarch=auto -qtune=auto -qipa=level=2 -blpdata
  187.facerec:  -O3 -qarch=auto -qtune=auto -qfdpr -blpdata
                fdpr -q -O3
  188.ammp:     -O5 -qalign=natural -qfdpr -blpdata -lhmu
                fdpr -q -O3
  189.lucas:    users = 4
                -O3 -qarch=auto -qtune=auto -qfdpr -blpdata -qessl -lessl
                fdpr -q -O3
  191.fma3d:    -qpdf1/pdf2
                -O3 -qarch=auto -qtune=auto -qipa=level=2 -q64 -lhmu -blpdata -lmass
  200.sixtrack: -qpdf1/pdf2
                -O5 -qfdpr -qalign=struct=natural
                fdpr -q -O3
  301.apsi:     -O5
```

The installed OS level is AIX 5L for POWER Version 5.3 with the 5300-05 Recommended Technology Level.
The installed C/C++ compiler is XL C/C++ Enterprise Edition Version 8.0 for AIX with the March 2006 PTF.
The installed Fortran copiler is XL Fortran Enterprise Edition Version 10.1 with the May 2006 AIX PTF.

SMT: Acronym for "Simultaneous Multi-Threading". A processor technology that allows the simultaneous execution of multiple thread contexts within a single processor core. (Enabled by default)
SUT: Acronym for "System Under Test"
ESSL: Engineering and Scientific Subroutine Library
PTF: IBM identifier for "Program Fix Level"

ANSI C89: IBM XL C for AIX invoked as xlc
Fortran 77: IBM XL Fortran for AIX invoked as xlf90
Fortran 90: IBM XL Fortran for AIX invoked as xlf90

ulimits set to unlimited.
Large page mode, memory affinity and MATMUL threading were set as follows:

```
vmo -r -o lgpg_regions=1536 -o lgpg_size=16777216
chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
bosboot -aD
shutdown -rF
export MEMORY_AFFINITY=MCM
export XLFRTEOPTS=intrinthds=1
```

The following config-file entry was used to assign each benchmark process to a core:

```
submit = let "MYCPU=2*$SPECUSERNUM"; if (("$MYCPU > 7")) then let "MYCPU-=7"; fi; bindprocessor $$ $MYCPU; $command
```

The "bindprocessor" AIX command binds a process to a CPU core.