CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7140M, 3.40 GHz

SPECint_rate2000 = 43.0

SPECint_rate_base2000 = 43.0

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Aug-2006 | Hardware Avail: Aug-2006 | Software Avail: May-2006

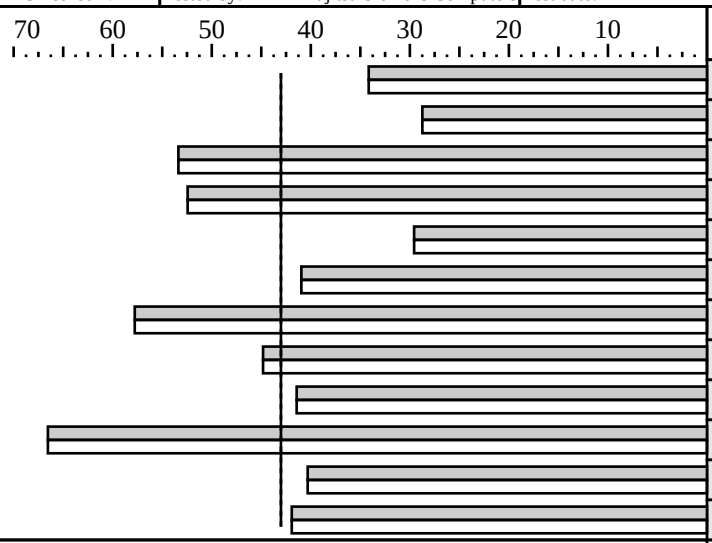

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	190	34.2	4	190	34.2
175.vpr	4	226	28.7	4	226	28.7
176.gcc	4	95.6	53.4	4	95.6	53.4
181.mcf	4	159	52.4	4	159	52.4
186.crafty	4	157	29.6	4	157	29.6
197.parser	4	204	41.0	4	204	41.0
252.eon	4	104	57.8	4	104	57.8
253.perlbmk	4	186	44.8	4	186	44.8
254.gap	4	123	41.4	4	123	41.4
255.vortex	4	132	66.5	4	132	66.5
256.bzip2	4	173	40.3	4	173	40.3
300.twolf	4	332	41.9	4	332	41.9

Hardware

CPU:	Intel Xeon processor 7140M (3.40 GHz, 2x1MB L2, 16MB L3, 800 MHz system bus)
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1,2,4 chips
Parallel:	No
Primary Cache:	12k micro-ops(I) + 16KB(D) on chip, per core
Secondary Cache:	1024KB(I+D) on chip, per core
L3 Cache:	16MB on chip, per chip
Other Cache:	N/A
Memory:	16x1GB DDRII-RAM PC2-3200R (CAS 3-3-3)
Disk Subsystem:	Fujitsu MAS3367NC (SCSI, 15krpm, 36GB)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060323Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafty:  -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast +FDO shlW32M.lib
   for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=true set globally)

The system bus runs at 800 MHz

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries