CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon processor X5355, 2.66 GHz

SPECint_rate2000 = 200

SPECint_rate_base2000 = 200

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Oct-2006 | Hardware Avail: Jan-2007 | Software Avail: May-2006

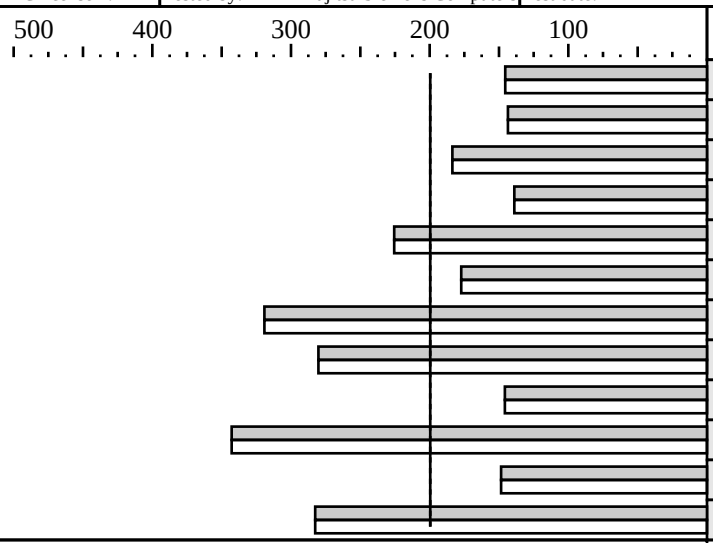

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	89.3	145	8	89.3	145
175.vpr	8	90.5	144	8	90.5	144
176.gcc	8	55.6	184	8	55.6	184
181.mcf	8	120	139	8	120	139
186.crafty	8	41.1	226	8	41.1	226
197.parser	8	94.3	177	8	94.3	177
252.eon	8	37.8	319	8	37.8	319
253.perlbmk	8	59.6	280	8	59.6	280
254.gap	8	70.0	146	8	70.0	146
255.vortex	8	51.4	343	8	51.4	343
256.bzip2	8	93.8	148	8	93.8	148
300.twolf	8	98.5	283	8	98.5	283

Hardware

CPU:	Intel Xeon processor X5355 (2.66 GHz, 2x4MB L2, 1333 MHz system bus)
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1GB DDR2-RAM PC2-5300F (CAS 5-5-5)
Disk Subsystem:	Seagate ST373454SS (SAS, 15.4krpm, 73GB)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060323Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafty:  -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast +FDO shlW32M.lib
   for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=true set globally)

The system bus runs at 1333 MHz

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
BIOS configuration:
Adjacent Sector Prefetch = disable

The PRIMERGY RX300 S3 and the PRIMERGY TX300 S3
are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```