CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Bull

NovaScale R440 (Intel Xeon processor 5160, 3.00 GHz)

SPECint2000 = 2956

SPECint_base2000 = 2951

SPEC license #: 20 | Tested by: Bull | Test date: Nov-2006 | Hardware Avail: Nov-2006 | Software Avail: Nov-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	76.4	1832	76.4	1832
175.vpr	1400	66.2	2115	65.0	2153
176.gcc	1100	36.5	3016	36.5	3016
181.mcf	1800	45.9	3920	45.9	3920
186.crafty	1000	36.7	2728	36.7	2728
197.parser	1800	74.2	2427	74.0	2432
252.eon	1300	33.6	3864	33.6	3864
253.perlbmk	1800	50.5	3568	50.5	3568
254.gap	1100	38.8	2832	39.0	2823
255.vortex	1900	39.7	4791	39.7	4791
256.bzip2	1500	67.9	2210	67.9	2210
300.twolf	3000	86.1	3483	86.1	3483

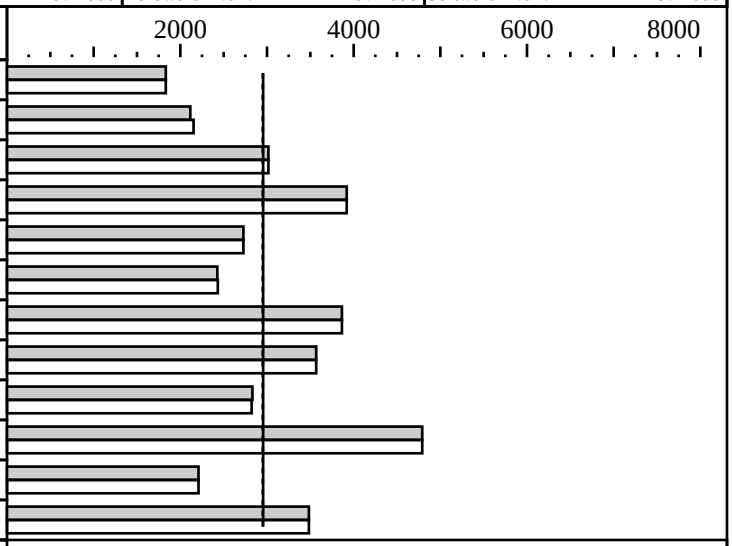

Hardware

CPU:	Intel Xeon Processor 5160 (1332MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1 to 2 chips
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	4096KB(I+D) on chip per chip (shared)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (8x1GB 533MHz ECC CL4 DDR2 FB-DIMM)
Disk Subsystem:	2x36GB SAS 15000 rpm
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise Edition (32 bits), Service Pack1
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.1, - Build 20060927Z Package ID: W_CC_C_9.1.032 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library 8.0 (shlW32M.lib)
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Portability flags:
 176.gcc:     -Dalloca=_alloca /F10000000
 186.crafty:  -DNT_i386
 253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
 254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO ONESTEP=yes shlW32M.lib
 for C++ program 252.eon:
 -fast -Qcxx_features +FDO ONESTEP=yes

Peak Tuning Flags:
   164.gzip:     basepeak=yes
   175.vpr:      -fast +FDO ONESTEP=yes
   176.gcc:      basepeak=yes
   181.mcf:      basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
   186.crafty:   basepeak=yes
   197.parser:   -fast +FDO ONESTEP=yes
   252.eon:      basepeak=yes
   253.perlbmk:  basepeak=yes
   254.gap:      -fast +FDO ONESTEP=yes
   255.vortex:   basepeak=yes
   256.bzip2:    basepeak=yes
   300.twolf:    basepeak=yes


 Other Configuration Notes
   /NUMPROC=1 flag was added to boot.ini to invoke
   uniprocessor environment


For information about Bull please see:
http://www.bull.com
```