CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL25p G2 (AMD Opteron (TM) 2220SE)

SPECint_rate2000 = 45.4

SPECint_rate_base2000 = 41.5

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Nov-2006 | Hardware Avail: Jan-2007 | Software Avail: Sep-2006

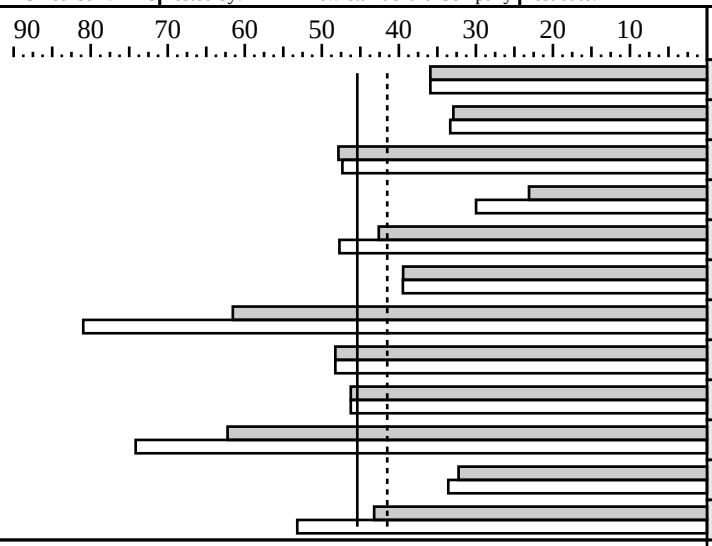

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	90.5	35.9	2	90.5	35.9
175.vpr	2	98.7	32.9	2	97.5	33.3
176.gcc	2	53.3	47.8	2	53.9	47.3
181.mcf	2	181	23.1	2	139	30.0
186.crafty	2	54.5	42.6	2	48.6	47.7
197.parser	2	106	39.4	2	106	39.5
252.eon	2	49.0	61.6	2	37.3	81.0
253.perlbmk	2	86.6	48.2	2	86.6	48.2
254.gap	2	55.2	46.2	2	55.2	46.2
255.vortex	2	70.8	62.2	2	59.4	74.2
256.bzip2	2	108	32.2	2	104	33.6
300.twolf	2	161	43.2	2	131	53.2

Hardware

CPU:	AMD Opteron (TM) 2220SE
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 GB (4x2 GB PC2-5300P CL5.0)
Disk Subsystem:	1x36 GB 10 K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (version 9.1 Build 20060816Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 8.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -Qcxx_features -arch:SSE2 +FDO ONESTEP=yes
Portability flags:
  176.gcc:     -Dalloca=_alloca /F10000000
  186.crafty:  -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:    basepeak=yes
  175.vpr:     -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  176.gcc:     -fast -arch:SSE2 -Oi- -Qunroll3          +FDO
  181.mcf:     -O3 -Qipo -QaxN                         +FDO ONESTEP=yes shlw32M.lib
  186.crafty:  -fast -arch:SSE2                         +FDO ONESTEP=yes
  197.parser:  -arch:SSE2 -Oi- -Qipo                    +FDO ONESTEP=yes
  252.eon:     -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  253.perlbmk: basepeak=yes
  254.gap:     basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  255.vortex:  -fast -arch:SSE2 -Oi- -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes shlw32M.lib
  256.bzip2:   -O3 -Qipo -QaxN  -Qunroll2                              shlw32M.lib
  300.twolf:   -fast -arch:SSE2 -Qansi_alias           +FDO ONESTEP=yes shlw32M.lib
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
  The start /b /wait /affinity command is used to bind CPU(s) to processes.
```