CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c (AMD Opteron (TM) 2220)

SPECint2000 = 1991

SPECint_base2000 = 1829

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Nov-2006 | Hardware Avail: Jan-2007 | Software Avail: Oct-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	90.1	1554	90.1	1554
175.vpr	1400	95.9	1460	95.0	1474
176.gcc	1100	53.9	2041	53.4	2060
181.mcf	1800	154	1170	123	1465
186.crafty	1000	55.1	1814	49.2	2033
197.parser	1800	105	1713	105	1712
252.eon	1300	47.4	2740	37.2	3493
253.perlbmk	1800	87.2	2064	87.2	2064
254.gap	1100	53.8	2045	53.8	2045
255.vortex	1900	69.7	2725	58.9	3228
256.bzip2	1500	105	1424	101	1486
300.twolf	3000	162	1857	132	2279

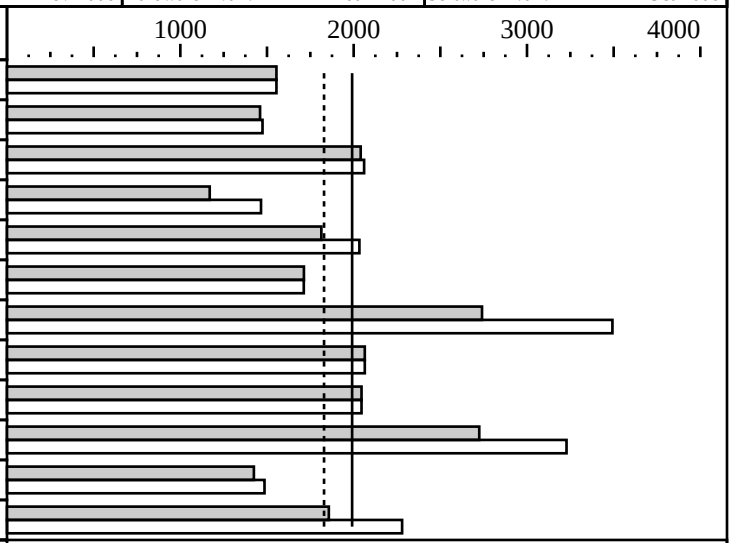

Hardware

CPU:	AMD Opteron (TM) 2220
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 GB (4x2 GB PC2-5300P CL5.0)
Disk Subsystem:	1x36 GB 10 K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (version 9.1 Build 20060927Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 8.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -Qcxx_features -arch:SSE2 +FDO ONESTEP=yes
Portability flags:
  176.gcc:     -Dalloca=_alloca /F10000000
  186.crafty:  -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:    basepeak=yes
  175.vpr:     -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  176.gcc:     -fast -arch:SSE2 -Oi- -Qunroll3          +FDO
  181.mcf:     -O3 -Qipo -QaxN                         +FDO ONESTEP=yes shlw32M.lib
  186.crafty:  -fast -arch:SSE2                         +FDO ONESTEP=yes
  197.parser:  -arch:SSE2 -Oi- -Qipo                    +FDO ONESTEP=yes
  252.eon:     -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  253.perlbmk: basepeak=yes
  254.gap:     basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  255.vortex:  -fast -arch:SSE2 -Oi- -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes shlw32M.lib
  256.bzip2:   -O3 -Qipo -QaxN  -Qunroll2                              shlw32M.lib
  300.twolf:   -fast -arch:SSE2 -Qansi_alias           +FDO ONESTEP=yes shlw32M.lib
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
  The start /b /wait /affinity command is used to bind CPU(s) to processes.
```