CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Bull

NovaScale B280 (Intel Xeon processor 5110, 1.60 GHz)

SPECint2000 = 1690

SPECint_base2000 = 1687

SPEC license #: 20 | Tested by: Bull | Test date: Dec-2006 | Hardware Avail: Jan-2007 | Software Avail: Dec-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	141	996	141	994
175.vpr	1400	112	1246	110	1271
176.gcc	1100	57.3	1920	57.3	1920
181.mcf	1800	68.2	2640	68.2	2640
186.crafty	1000	68.5	1459	68.5	1459
197.parser	1800	135	1331	135	1334
252.eon	1300	62.4	2082	62.4	2082
253.perlbmk	1800	93.5	1926	93.5	1926
254.gap	1100	66.4	1657	66.3	1658
255.vortex	1900	67.3	2825	67.3	2825
256.bzip2	1500	121	1240	121	1240
300.twolf	3000	161	1868	161	1868

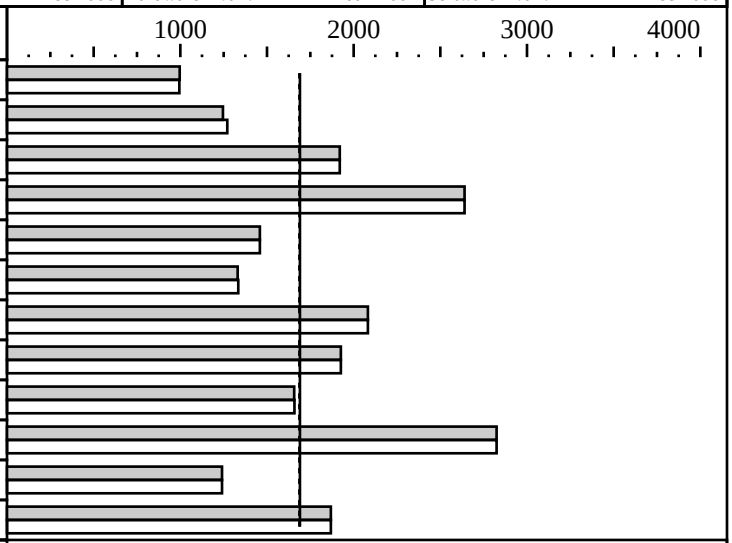

Hardware

CPU:	Intel Xeon Processor 5110 (1.60 GHz, 4MB L2, 1066MHz bus)
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1 to 2 chips
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	4096KB(I+D) on chip per chip (shared by 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (1GB DIMMx8, FB-DIMM PC2-5300F ECC CL5)
Disk Subsystem:	1x73GB SAS 10000 rpm
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise Edition (32 bits), Service Pack1
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.1, - Build 20061103Z Package ID: W_CC_C_9.1.033 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library 8.0 (shlW32M.lib)
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Portability flags:
 176.gcc:     -Dalloca=_alloca /F10000000
 186.crafty:  -DNT_i386
 253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
 254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO ONESTEP=yes shlW32M.lib
 for C++ program 252.eon:
 -fast -Qcxx_features +FDO ONESTEP=yes

Peak Tuning Flags:
   164.gzip:     -fast +FDO ONESTEP=yes
   175.vpr:      -fast +FDO ONESTEP=yes
   176.gcc:      basepeak=yes
   181.mcf:      basepeak=yes
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    186.crafty:   basepeak=yes
    197.parser:   -fast +FDO ONESTEP=yes
    252.eon:      basepeak=yes
    253.perlbmk:  basepeak=yes
    254.gap:      -fast +FDO ONESTEP=yes
    255.vortex:   basepeak=yes
    256.bzip2:    basepeak=yes
    300.twolf:    basepeak=yes


 Other Configuration Notes
   /NUMPROC=1 flag was added to boot.ini to invoke
   uniprocessor environment


For information about Bull please see:
http://www.bull.com
```