CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Intel(R) Corporation

Intel(R) DG965WH motherboard(3.4 GHz, Intel(R) Pentium(TM) D processor 950)

SPECint2000 = 1705

SPECint_base2000 = 1705

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Oct-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	119	1173	120	1171
175.vpr	1400	120	1168	119	1180
176.gcc	1100	55.8	1973	55.8	1973
181.mcf	1800	85.2	2112	85.2	2112
186.crafty	1000	78.3	1277	78.8	1270
197.parser	1800	134	1340	134	1344
252.eon	1300	56.5	2302	56.7	2294
253.perlbmk	1800	87.6	2055	87.8	2050
254.gap	1100	57.1	1927	57.1	1927
255.vortex	1900	62.3	3050	62.3	3050
256.bzip2	1500	117	1284	117	1282
300.twolf	3000	174	1728	174	1728

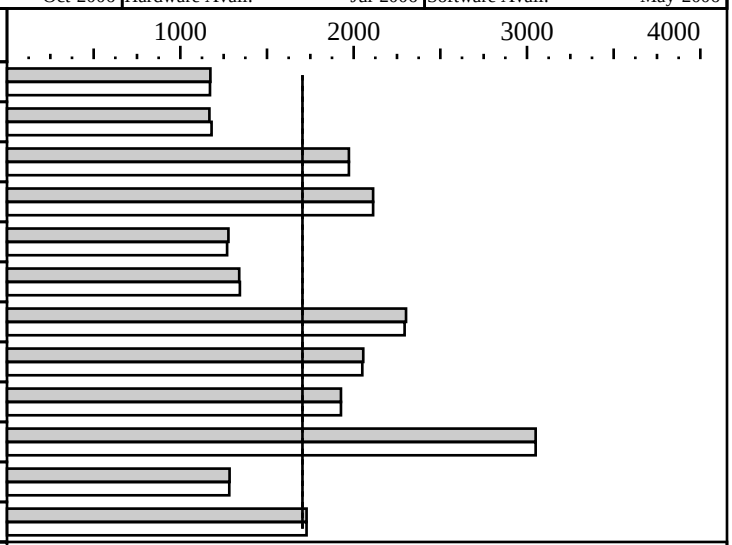

Hardware

CPU:	Intel(R) Pentium(TM) D processor 950(3.4 GHz, 800 MHz bus)
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12K micro-opsI + 16KBD per core, on chip
Secondary Cache:	2 MB(I+D) per core, on chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Micron MT16HTF12864AY-80ED4 DDR2 800, CL5)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	SoundBlaster Live! PCI card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafty: -DNT_i386
252.eon:     -DHAS_ERRLIST
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
256.bzip2:   -fast -Oa -Qunroll1 +FDO
300.twolf:    -fast -O3 +FDO shlW32M.lib
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 1/2007:
http://www.intel.com/products/motherboard/DG965WH/index.htm
The system bus runs at 1066 MHz
```