CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Intel(R) Corporation

Intel(R) DG965WH motherboard(2.4 GHz, Intel(R) Core(TM) 2 Duo processor E6600)

SPECint2000 = 2563

SPECint_base2000 = 2559

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Oct-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	94.2	1487	93.8	1492
175.vpr	1400	74.1	1889	72.3	1936
176.gcc	1100	39.5	2785	39.5	2785
181.mcf	1800	41.6	4329	41.6	4329
186.crafty	1000	45.2	2214	45.3	2207
197.parser	1800	95.8	1879	96.0	1875
252.eon	1300	41.9	3106	41.8	3111
253.perlbmk	1800	60.5	2973	60.7	2966
254.gap	1100	42.8	2571	42.8	2571
255.vortex	1900	42.7	4454	42.7	4454
256.bzip2	1500	77.5	1934	77.8	1929
300.twolf	3000	110	2736	110	2736

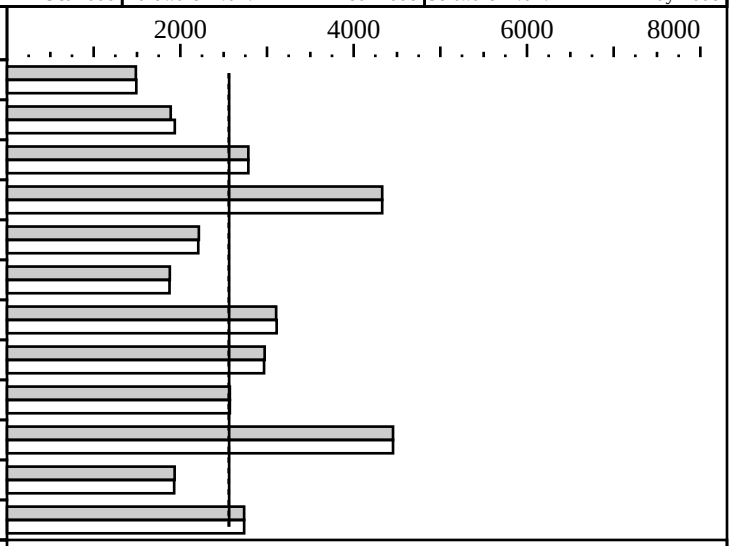

Hardware

CPU:	Intel(R) Core(TM) 2 Duo processor E6600(2.4 GHz, 1066 MHz bus)
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	32KBI + 32KBD per core, on chip
Secondary Cache:	4 MB(I+D) per chip, on chip (shared)
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Micron MT16HTF12864AY-80ED4 DDR2 800, CL5)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	SoundBlaster Live! PCI card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafty: -DNT_i386
252.eon:     -DHAS_ERRLIST
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
256.bzip2:   -fast -Oa -Qunroll1 +FDO
300.twolf:    -fast -O3 +FDO shlW32M.lib
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 1/2007:
http://www.intel.com/products/motherboard/DG965WH/index.htm
The system bus runs at 1066 MHz
```