



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

## Sun Microsystems

SPECint<sup>®</sup>\_rate2006 = 97.0

## Sun SPARC Enterprise T5220

SPECint\_rate\_base2006 = 89.1

CPU2006 license: 6


Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

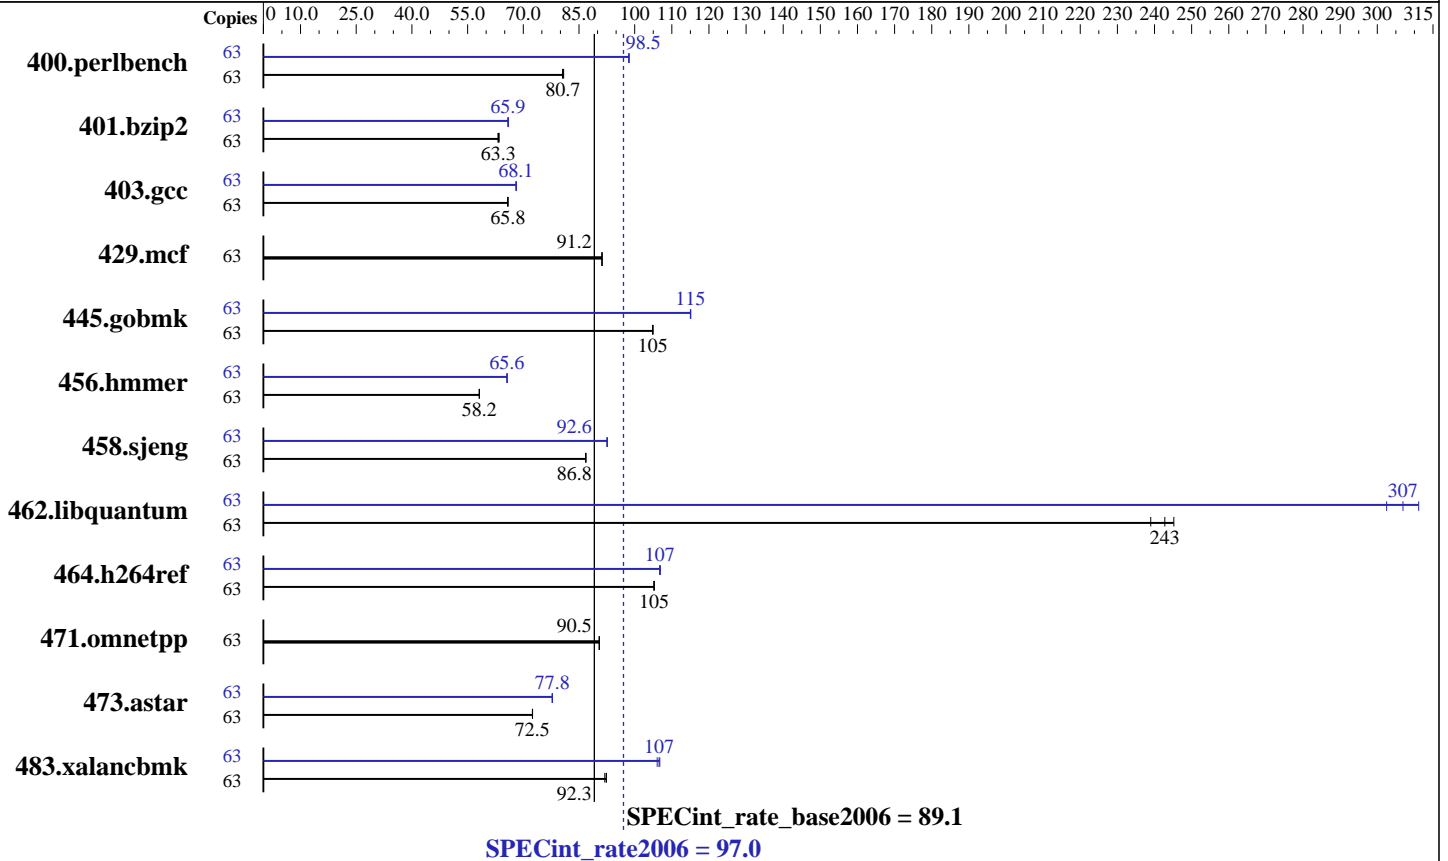

### Hardware

CPU Name: UltraSPARC T2  
 CPU Characteristics: 1582  
 CPU MHz: 1582  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 8 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 16 KB I + 8 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB)  
 Disk Subsystem: 393 GB RAID 0 using Solaris Volume Manager on 4x 146 GB Sun 10K RPM SAS blocksize 384 KB  
 Other Hardware: None

### Software

Operating System: Solaris 10 10/08  
 Compiler: Sun Studio 12 Update 1 and gccfss V4.2.1 (see additional detail below)  
 Auto Parallel: No  
 File System: ufs  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

## Sun Microsystems

SPECint\_rate2006 = 97.0

## Sun SPARC Enterprise T5220

SPECint\_rate\_base2006 = 89.1

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	63	<b>7626</b>	<b>80.7</b>	7611	80.9	7641	80.6	63	<b>6251</b>	<b>98.5</b>	6250	98.5	6255	98.4
401.bzip2	63	9574	63.5	9622	63.2	<b>9602</b>	<b>63.3</b>	63	9229	65.9	<b>9227</b>	<b>65.9</b>	9213	66.0
403.gcc	63	7710	65.8	<b>7703</b>	<b>65.8</b>	7695	65.9	63	<b>7451</b>	<b>68.1</b>	7446	68.1	7453	68.0
429.mcf	63	6301	91.2	<b>6299</b>	<b>91.2</b>	6299	91.2	63	6301	91.2	<b>6299</b>	<b>91.2</b>	6299	91.2
445.gobmk	63	6296	105	<b>6301</b>	<b>105</b>	6306	105	63	5747	115	5743	115	<b>5743</b>	<b>115</b>
456.hammer	63	<b>10103</b>	<b>58.2</b>	10103	58.2	10112	58.1	63	<b>8956</b>	<b>65.6</b>	8954	65.6	8961	65.6
458.sjeng	63	<b>8779</b>	<b>86.8</b>	8777	86.8	8780	86.8	63	8231	92.6	8236	92.6	<b>8234</b>	<b>92.6</b>
462.libquantum	63	<b>5377</b>	<b>243</b>	5324	245	5462	239	63	4315	303	4195	311	<b>4253</b>	<b>307</b>
464.h264ref	63	13242	105	<b>13251</b>	<b>105</b>	13256	105	63	13062	107	<b>13060</b>	<b>107</b>	13040	107
471.omnetpp	63	4350	90.5	<b>4350</b>	<b>90.5</b>	4356	90.4	63	4350	90.5	<b>4350</b>	<b>90.5</b>	4356	90.4
473.astar	63	6105	72.4	<b>6102</b>	<b>72.5</b>	6100	72.5	63	<b>5684</b>	<b>77.8</b>	5682	77.8	5685	77.8
483.xalancbmk	63	4704	92.4	4728	91.9	<b>4709</b>	<b>92.3</b>	63	<b>4079</b>	<b>107</b>	4099	106	4072	107

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Invocation Notes

This result was measured with pre-release build 36.0 of Sun Studio 12 Update 1

Peak also uses "GCC for SPARC Systems 4.2.1", which combines gcc with the Sun Code Generator for SPARC systems. It is invoked as "gcc", and accepts source code compatible with GCC 4.2.

For more information, including support, see <http://cooltools.sunsource.net/gcc/>

### Submit Notes

A processor set was created using

```
psrset -c 1-63
```

and the runspec process was placed into the set using

```
psrset -e 1
```

The config file option 'submit' was used to select specific processors within the set, along with the pbind command.

### Operating System Notes

ulimit -s 131072 was used to allow the stack to grow up to 131072 KB (aka 128 MB). Note that saying "131072" is preferable to "unlimited", because there is a tradeoff

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 97.0

Sun SPARC Enterprise T5220

SPECint\_rate\_base2006 = 89.1

CPU2006 license: 6

Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

## Operating System Notes (Continued)

between space for the stack vs. space for the heap.

/etc/system parameters

autoup=600

Causes pages older than the listed number of seconds to be written by fsflush.

bufhwm=3000

Memory byte limit for caching I/O buffers

segmap\_percent=1

Set maximum percent memory for file system cache

tune\_t\_fsflushr=10

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

tsb\_rss\_factor=128

Suggests that the the size of the TSB (Translation Storage Buffer) may be increased if it is more than 25% (128/512) full. Doing so may reduce TSB traps, at the cost of additional kernel memory.

The "webconsole" service was turned off using  
svcadm disable webconsole

The system had 111 GB of swap space.  
The ufs fragment size was set to 8192

## Platform Notes

This result was measured on a Sun SPARC Enterprise T5220. All of these are electronically equivalent:

- Sun SPARC Enterprise T5120
- Sun SPARC Enterprise T5220
- Fujitsu SPARC Enterprise T5120
- Fujitsu SPARC Enterprise T5220

A SPARC Enterprise 5120 can hold up to 4 disks, and a 5220 can hold up to 8. This system was tested with 4 disks; therefore, this result applies to both the 5120 and the 5220.

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 97.0

Sun SPARC Enterprise T5220

SPECint\_rate\_base2006 = 89.1

CPU2006 license: 6

Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC  
403.gcc: -DSPEC\_CPU\_SOLARIS  
462.libquantum: -DSPEC\_CPU\_SOLARIS  
483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Base Optimization Flags

C benchmarks:

-g -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto -xalias\_level=std  
-M /usr/lib/ld/map.bssalign

C++ benchmarks:

-g0 -library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto  
-xdepend -xalias\_level=compatible -M /usr/lib/ld/map.bssalign

## Base Other Flags

C benchmarks:

-xjobs=32 -V -#

C++ benchmarks:

-xjobs=32 -verbose=diags,version

## Peak Compiler Invocation

C benchmarks (except as noted below):

cc

403.gcc: gcc

456.hmmmer: gcc

C++ benchmarks:

cc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC  
462.libquantum: -DSPEC\_CPU\_SOLARIS  
483.xalancbmk: -DSPEC\_CPU\_SOLARIS



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 97.0

Sun SPARC Enterprise T5220

SPECint\_rate\_base2006 = 89.1

CPU2006 license: 6

Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -g -xprofile=collect:./feedback(pass 1)
               -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
               -xprefetch=no%auto -M /usr/lib/ld/map.bssalign
               -xalias_level=std -xipo=2 -Xc -xrestrict -lfast

401.bzip2: -g -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
            -M /usr/lib/ld/map.bssalign -xalias_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)
          -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
          -xprefetch=no%auto -Wl,-M,/usr/lib/ld/map.bssalign -xipo=2
          -xalias_level=std

429.mcf: basepeak = yes

445.gobmk: -g -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
            -xprefetch=no%auto -M /usr/lib/ld/map.bssalign
            -xalias_level=std -xrestrict

456.hmmer: -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
            -Wl,-M,/usr/lib/ld/map.bssalign -xipo=2 -xalias_level=std

458.sjeng: -g -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
            -xprefetch=no%auto -M /usr/lib/ld/map.bssalign -xipo=2

462.libquantum: -g -fast -xpagesize=4M -xprefetch_level=3
                -xprefetch_auto_type=indirect_array_access
                -M /usr/lib/ld/map.bssalign -xipo=2 -xalias_level=std

464.h264ref: -g -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
              -xprefetch=no%auto -M /usr/lib/ld/map.bssalign -xipo=2
              -xalias_level=std

```

C++ benchmarks:

```

471.omnetpp: basepeak = yes

473.astar: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize_heap=4M
            -xpagesize_stack=64K -xprefetch=no%auto -xdepend
            -xalias_level=compatible -M /usr/lib/ld/map.bssalign
            -xipo=2 -xarch=v8plusb -lfast -lbsdmalloc

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 97.0

Sun SPARC Enterprise T5220

SPECint\_rate\_base2006 = 89.1

CPU2006 license: 6

Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

## Peak Optimization Flags (Continued)

```
483.xalanbmk: -g0 -library=stlport4 -fast -xpagesize=4M
              -xprefetch=no%auto -xdepend -xalias_level=compatible
              -M /usr/lib/ld/map.bssalign -xipo=2 -lfast
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-xjobs=32 -V -#
```

```
403.gcc: -v
```

```
456.hmmr: -v
```

C++ benchmarks:

```
-xjobs=32 -verbose=diags,version
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r3.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r3.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Aug 5 18:23:30 2009 by SPEC CPU2006 PS/PDF formatter v6323.