CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation
Intel VC820 (800EB MHz Pentium III)

SPECint2000 = 355

SPECint_base2000 = 352

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Mar-2000 | Hardware Avail: Nov-1999 | Software Avail: Feb-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	348	402	355	394
175.vpr	1400	473	296	473	296
176.gcc	1100	333	330	330	333
181.mcf	1800	730	247	731	246
186.crafty	1000	248	403	248	403
197.parser	1800	595	303	594	303
252.eon	1300	400	325	400	325
253.perlbmk	1800	382	471	382	471
254.gap	1100	334	330	331	332
255.vortex	1900	321	591	314	606
256.bzip2	1500	471	319	453	331
300.twolf	3000	928	323	899	334

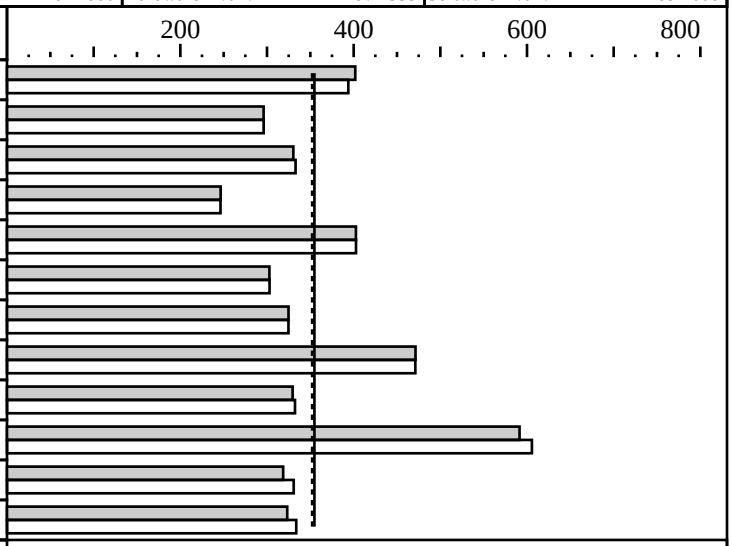

Hardware

CPU:	800EB MHz Pentium III processor
CPU MHz:	800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	16KBI + 16KBD on-die
Secondary Cache:	256KB(I+D) on-die ECC
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB PC800 RDRAM non-ECC
Disk Subsystem:	IBM DJNA 371800 ATA-66
Other Hardware:	Diamond Multimedia Viper 770 Ultra TNT2 AGP

Software

Operating System:	Windows 2000 (Build 2195)
Compiler:	Intel C Compiler 4.5 for Windows 2000 Microsoft Visual C++ 6.0 C libraries, SmartHeap library
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning: -QxK -Qipo_wp shlW32M.lib +FDO
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000 -Op
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip, 175.vpr, 181.mcf, 186.crafty, 197.parser, 252.eon, 253.perlbmk:
-QxK -Qipo_wp FDO shlW32M.lib
176.gcc, 254.gap, 255.vortex, 256.bzip2, 300.twolf:
-QxK -Qipo_wp FDO -Oa shlW32M.lib
Tested systems can be used with Shin-G ATX case,Sparkle Inc., power supply
Product description located as of 03/2000:
http://developer.intel.com/design/motherbd/vc/vc_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://channel.intel.com/ for more information
The system bus runs at 133 MHz
```